

**Fast Interface for New Issuance (FINI)**

**Application Programming Interface (API) Guide  
[For market-wide testing]**



# Contents

<b>1</b>	<b>Introduction</b> .....	<b>3</b>
<b>2</b>	<b>Connectivity Setup</b> .....	<b>4</b>
2.1	Create Agent Profile .....	4
2.2	Create Machine Profile .....	5
2.3	Obtain FINI API JWT Access Token.....	6
2.4	Invoke FINI APIs.....	13
<b>3</b>	<b>End-to-End Encryption</b> .....	<b>14</b>
3.1	Obtaining Crypto Metadata for Encryption .....	14
3.2	Encrypting API Requests .....	15
3.3	Decrypting API Responses.....	21
3.4	End-to-End Encryption Error Codes and Messages .....	22
<b>4</b>	<b>Formats and Conventions</b> .....	<b>23</b>
4.1	Identifiers.....	23
4.2	Data Formats .....	24
4.3	Request Field Conventions .....	26
4.4	Response Field Conventions .....	30
<b>5</b>	<b>API Endpoints</b> .....	<b>31</b>
5.1	Overview .....	31
5.2	Throttles.....	31
<b>6</b>	<b>IPO Reference Data</b> .....	<b>32</b>
6.1	Enquire IPO List.....	32
6.2	Enquire IPO Reference Data .....	34
<b>7</b>	<b>EIPO Subscription</b> .....	<b>45</b>
7.1	Add EIPO Subscription Entries .....	45
7.2	Change EIPO Subscription Entries.....	49
7.3	Invalidate EIPO Subscription Entries .....	52
7.4	Enquire EIPO Subscription Entries .....	53
<b>8</b>	<b>EIPO Funding</b> .....	<b>59</b>
8.1	Enquire EIPO Funding.....	59
8.2	Confirm EIPO Funding .....	64

## Version(s)

Publication Date	Version
13 July 2022	<b>Changes:</b> <ul style="list-style-type: none"><li>▪ "sub" field for signing Agent Profile JWT (G1) has been amended from "hkexapi" to the user's Company ID in Client Connect (See <a href="#">Section 2.3.1.2</a>)</li></ul>
27 May 2022 <b>[Current]</b>	<b>Changes:</b> <ul style="list-style-type: none"><li>▪ Supplemented End-to-End Encryption procedures (See <a href="#">Section 3</a>)</li><li>▪ Added warrants fields for SPACs (<a href="#">Enquire IPO Reference Data Endpoint</a>)</li><li>▪ Renamed several adviser fields for SFC Code of Conduct (<a href="#">Enquire IPO Reference Data Endpoint</a>)</li></ul> <b>Minor formatting:</b> <ul style="list-style-type: none"><li>▪ All data payloads unified as arrays (from objects)</li><li>▪ IPO identifier unified as "ipoID"</li><li>▪ IPO Status values updated for "Suspended" and "Cancelled"</li></ul>
5 January 2022	<b>Initial version released to market participants in preparation of market testing.</b>

## Disclaimer

HKEX and/or its subsidiaries endeavour to ensure the accuracy and reliability of the information provided, but do not guarantee its accuracy and reliability and accept no liability (whether in tort or contract or otherwise) for any loss or damage arising from any inaccuracy or omission or from any decision, action or non-action based on or in reliance upon information contained in this document.

No part of this document may be copied, distributed, transmitted, transcribed, stored in a retrieval system, translated into any human or computer language, or disclosed to third parties without written permission from HKEX.

HKEX reserves the right to amend any details in this document at any time, without notice.

# 1 Introduction

The FINI API Gateway offers a range of RESTful JSON endpoints for market participants to automate different types of IPO workflows, including obtaining IPO reference data, managing EIPO subscriptions and validating EIPO funding.

This version is being released to market participants in preparation of FINI's market-wide testing, and may be further refined during market rehearsal and before FINI's roll-out.

For further information on the FINI platform and testing phases, please visit the FINI website at: <https://www.hkex.com.hk/fini>, or via the QR code below:



## 2 Connectivity Setup

- To access the FINI API Gateway, market participants are required to create an Agent profile and at most 2 Machine profiles under their Company profile in the User Management section of Client Connect.
- After the Agent profile and Machine profile(s) have been created, FINI API users, as OAUTH client, have to pass 2 JSON Web Tokens (JWTs<sup>1</sup>): Agent Profile JWT (G1) and Machine Profile JWT (G2), to the Client Connect Access Management (AM) server for authentication.
- If authentication is successful, the AM server will return a FINI API JWT access token to API users. FINI API users have to pass this FINI API access token in the calling FINI APIs. The integrity and validity of FINI API JWT access token will be verified at the FINI API Gateway.
- FINI API Gateway and Client Connect Access Management (AM) server are assessed via Internet and TLS V1.2 will be used for encryption.

### 2.1 Create Agent Profile

- Each company can create at most one Agent profile for FINI API access.
- To create an Agent Profile in Client Connect, FINI API users have to generate JSON Web Key (JWK<sup>2</sup>) with an expiry date. To enhance security, each agent key must be renewed every year. Therefore, the expiry date must not be more than one year from registration time.
- The following parameters are suggested for JWK generation:

Parameter	Value
Key Type	RSA
Key Size	2048
Key Use	Signature
Algorithm	RS256
Key ID	SHA-256 hash <sup>3</sup> value of JWK
Expiry Date	Key expiration time, in Epoch time format

An example of JWK public key is shown below:

```
{
  "keys": [
    {
      "kty": "RSA",
      "e": "AQAB",
      "use": "sig",
      "kid": "eNL6Vj7vwaxjtwL+5QM=",
      "alg": "RS256",
      "n": "i4atD3PYe8YW7v8m...",
      "exp": 1618307105
    }
  ]
}
```

- To facilitate key renewal, API users can register at most 2 public keys for each Agent profile so that API users can renew and register a new public key before the existing key expires. Afterwards, API users can change their system to rotate to the new JWK in generating the G1 JWT with their own plan before the existing key expires.

<sup>1</sup> Refer to RFC 7519 at <https://tools.ietf.org/html/rfc7519>.

<sup>2</sup> Refer to RFC 7517 at <https://datatracker.ietf.org/doc/html/rfc7517>.

<sup>3</sup> Refer to RFC 7638 at <https://datatracker.ietf.org/doc/html/rfc7638>.

- Please refer to the User Management section of the Client Connect User Manual for detailed steps of agent profile maintenance.

## 2.2 Create Machine Profile

- Each company can create at most 2 Machine profiles for FINI API access. As such, API users can set up 2 machines submitting API requests to FINI concurrently for their company.
- To create a Machine Profile in Client Connect, FINI API users have to generate JSON Web Key (JWK) with an expiry date. To enhance security, each machine key must be renewed every year. Therefore, the expiry date must not be more than one year from registration time.
- The following parameters are suggested for JWK generation:

Parameter	Value
Key Type	RSA
Key Size	2048
Key Use	Signature
Algorithm	RS256
Key ID	SHA-256 hash value of JWK
Expiry Date	Key expiration time, in Epoch time format

An example of JWK public key is shown below:

```
{
  "keys": [
    {
      "kty": "RSA",
      "e": "AQAB",
      "use": "sig",
      "kid": "eNL6Vj7vwaxjtwL+5QM=",
      "alg": "RS256",
      "n": "i4atD3PYe8YW7v8m....",
      "exp": 1618307105
    }
  ]
}
```

- To facilitate key renewal, API users can register at most 2 public keys for each Machine profile so that API users can renew and register a new public key before the existing key expires. Afterwards, API users can change their system to rotate to the new JWK in generating the G2 JWT with their own plan before the existing key expires.

### 2.2.1 Grant API Function to Machine Profile

- Each machine profile must be granted the appropriate identities and API roles for invoking the corresponding FINI API(s). The following FINI API Roles can be granted to a machine profile:

FINI Identity	FINI API Role	Available API Category
FINICP	<ul style="list-style-type: none"> <li>▪ EU_finiIPORefDataAPI</li> <li>▪ EU_finiPOSubAPI</li> </ul>	<ul style="list-style-type: none"> <li>▪ IPO Reference Data</li> <li>▪ EIPO Subscriptions</li> </ul>
FINDB	<ul style="list-style-type: none"> <li>▪ EU_finiIPORefDataAPI</li> <li>▪ EU_finiPOFundAPI</li> </ul>	<ul style="list-style-type: none"> <li>▪ IPO Reference Data</li> <li>▪ EIPO Funding</li> </ul>

Other FINI identities	▪ EU_finilPORefDataAPI	▪ IPO Reference Data
-----------------------	------------------------	----------------------

- Please refer to the User Management section of the Client Connect User Manual for detailed steps of agent profile maintenance.

## 2.3 Obtain FINI API JWT Access Token

- Before invoking FINI API, API users must call an API to obtain a FINI API JWT Access Token from Client Connect Access Management (AM) server by passing the G1 and G2 JWT tokens. If authentication is successful, AM server will return a FINI API JWT access token to API users.
- API users have to generate the G1 and G2 JWT tokens according to their formats described as follows:

### 2.3.1 Prepare Agent Profile JWT (G1)

#### 2.3.1.1 Header

#	Parameter	Type	Description
1	alg	RS256	RS256 should be used for algorithm to encrypt JWT.
2	typ	JWT	

Sample Agent Profile JWT Header:

```
{
  "alg": "RS256",
  "typ": "JWT"
}
```

#### 2.3.1.2 Payload

#	Parameter	Sample	Description
1	aud	https://<CCAM>/openam/oauth2/eu/access_token	Value of the <CCAM > may be different for production and test environments.
2	iss	<issuer>	Agent JWT Issuer value as registered in Agent Profile in Client Connect.
3	exp	1610440800	Specifies the expiration time. This is the Unix epoch time. Must be less than 30 minutes from current system time
4	sub	CP123456	The user's Company ID in Client Connect.

Sample of Agent Profile JWT Payload:

```
{
  "aud": "https://<fr am>/openam/oauth2/eu/access_token",
  "iss": "https://www.finibroker.com/jwtissuer",
  "exp": 1610440800,
  "sub": "CP123456"
}
```

#### 2.3.1.3 Sign Agent Profile JWT (G1)

- Agent Profile JWT will be signed by private Agent JWK key. This value will be expected in “assertion” field in Authentication request parameter.

## 2.3.2 Prepare Machine Profile JWT (G2)

### 2.3.2.1 Header

#	Parameter	Type	Description
1	alg	RS256	RS256 should be used for algorithm to encrypt JWT.
2	typ	JWT	

Sample Machine Profile JWT Header:

```
{  
  "alg": "RS256",  
  "typ": "JWT"  
}
```

### 2.3.2.2 Payload

#	Parameter	Sample	Description
1	aud	https://<CCAM>/openam/oauth2/eu/access_token	Value of the <CCAM > may be different for production and test environments.
2	iss	0fd68f99-e64d-4544-b4d6-bcc1d7c12c1e	Machine Profile UUID. Machine Profile UUID is system generated ID of Machine profile in Client Connect.
3	exp	1610440800	Specifies the expiration time. This is the Unix epoch time. Must be less than 30 minutes from current system time
4	sub	0fd68f99-e64d-4544-b4d6-bcc1d7c12c1e	Machine Profile UUID. Machine Profile UUID is system generated ID of Machine profile.

Sample of Machine Profile JWT:

```
{  
  "aud": "https://<fr am>/openam/oauth2/access_token",  
  "iss": "0fd68f99-e64d-4544-b4d6-bcc1d7c12c1e",  
  "exp": 1610440800,  
  "sub": "0fd68f99-e64d-4544-b4d6-bcc1d7c12c1e"  
}
```

### 2.3.2.3 Sign Agent Profile JWT (G2)

- Machine Profile JWT will be signed by private Machine JWK key. Public JWK will be imputed by user in CC IDP while create Machine profile. This value will be expected in "client\_assertion" field in request parameter.



### 2.3.3 Call FINI API JWT Access Token API

- API users must call an API to obtain a FINI API JWT Access Token from Client Connect Access Management (AM) server by passing the G1 (Agent profile) and G2 (Machine profile) JWT tokens being prepared as described above. AM server will decrypt and verify the G1 JWT and G2 JWT by the using the registered Agent public key and Machine public key respectively.
- AM server will return a valid FINI API JWT access token after the G1 JWT and G2 JWT are verified.

<b>Host Name</b>	https://openam.connect.hkex.com.hk			
<b>URI</b>	/openam/oauth2/eu/access_token			
<b>Method</b>	POST			
<b>Request Header</b>				
<b>Parameter</b>	<b>Type</b>	<b>Required</b>	<b>Sample Value</b>	<b>Description</b>
Content-Type	String	Y	application/x-www-form-urlencoded	
<b>Request Parameter</b>				
<b>Parameter</b>	<b>Type</b>	<b>Required</b>	<b>Sample Value</b>	<b>Description</b>
grant_type	String	Y	urn:ietf:params:oauth:grant-type:jwt-bearer	This specifies the Agent Profile assertion grant type.
assertion	String	Y	eyJhbGciOiJSUzI1NiIsInR5cCI6IkpXVCJ9.eyJhdWQiOiJodHRwOi8vd3d3LmdhbWEtdGVjaC5jb206OTA4MC9zc28vb2F1dGgyL2FjY2Vzc190b2tlbilsImZcyI6InRlc3Rv...	This specifies the signed Agent Profile (G1) JWT.
client_assertion_type	String	Y	urn:ietf:params:oauth:client-assertion-type:jwt-bearer	This specifies the Machine Profile client assertion type.
client_assertion	String	Y	eyJhbGciOiJSUzI1NiIsInR5cCI6IkpXVCJ9.eyJhdWQiOiJodHRwOi8vd3d3LmdhbWEtdGVjaC5jb206OTA4MC9zc28vb2F1dGgyL2FjY2Vzc190b2tlbilsImZcyI6InRlc3Rv...	This specifies the signed Machine Profile (G2) JWT.
<b>Response Body</b>				
<b>Parameter</b>	<b>Type</b>	<b>Required</b>	<b>Sample Value</b>	<b>Description</b>
access_token	String	Y	BNwWkbMD690HKLXhh0MOaQ0o3Hc	This is a JWT Access Token. This access token will be passed while calling FINI API.
scope	String	Y	CP00001	Company Id will be return as scope value.
token_type	String	Y	Bearer	This specify the Access Token type.
expires_in	Number	Y	30	This specify expiration of JWT Access Token in seconds.
<b>HTTP Status Code</b>	ForgeRock Reference link <a href="#">here</a>			
<b>Error Messages</b>				
<b>Error</b>	<b>Error Description</b>			<b>Action</b>
invalid_grant	JWT assertion is expired or invalid			Agent JWT (G1) expired
invalid_client	JWT has expired			Machine Profile JWT(G2) expired
invalid_request	JWT expiration time is unreasonable			Agent/Machine Profile JWT time is over 30 minutes
invalid_grant	JWT assertion is not valid			Agent Profile JWT found invalid or not able to parse
server_error	Failed to parse json: Unexpected end-of-input in field name\n at [...]			Machine Profile JWT could not parse
invalid_client	Client authentication failed			client_assertion_type is not valid
unsupported_grant_type	Unknown Grant Type, urn:&#x3a;ietf&#x3a;params&#x3a;oauth&#x3a;grant-type&#x3a;jwt-bearer			grant_type value is not valid
<b>Sample Success Response (HTTP Status Code 200)</b>				

```

{
  "access_token":
  "eyJ0eXAiOiJKV1QiLCJraWQiOiI0aUNLRkIwUlhJeHI0b3IxcjNUb0JkUmlldnM9liwiYWxnIjoiUIMyNTYifQ.eyJzdWIiOiJoa2V4YXBpIiwia3RzIjoiaT0FVVEgyX1NUQVRFT
  EVTU19HUkFOVCIsImF1ZGI0VHJhY2tpbmdJZCI6IjkhZTQ0OTdiltMxYWItdNDY3Yi1hMzU1LTlkNzE0OWExOTdhYS0xMzE2ODgiLCJpc3MiOiJodHRwczovL2NvbW
  5lY3Q0YU0udTFjcC5oa2V4LmNvbS5oazo0NDMvb3BlbmFtL29hdXRoMi9ldSIsInRva2VuTmFiZSI6ImFjY2Vzc190b2l1bilsInRva2VuX3R5cGUiOiJlYXN0IiwiaWF0Ijoi
  RoR3JhbnRJCi6lY0a05tTGFGYUUtellxeVpuSEZaZWl6YkgtdW5lcmF1ZCI6IjE1YjZlNjJlTkyMjltNDM1Mi05ZDZlLTdjODEyYUwNzc2ZSI6Im5iZil6MTY0OTgzMDI
  3MywiZ3JhbnRfdHlwZSI6InVyb3ppZXRmOnBhcmFtczpvYXV0aDpncmFudC10eXBIOmp3dC1iZWZyZXliLCJzY29wZSI6WjY29wZSI6WjY29wZSI6WjY29wZSI6WjY29wZSI6
  InJlYXN0IiwiaWF0IjoiL2V1liwiZXRhIjoiNjQ5ODMzODczLzJpYXQiOiJlYXN0IiwiaWF0IjoiL2V1liwiZXRhIjoiNjQ5ODMzODczLzJpYXQiOiJlYXN0IiwiaWF0Ijoi
  NUFNzQ5J9.NHu1-0bPRMpw-e6YTZYiAcvhlrL6Zij6NMjB84BYSdpEMX_Xxw9pPgu4lazzEsyO9G1kd4A0_EHWkiU6mW00A6LmrWhvgwRC3ve7Q_QORPa--
  p0MoKMC1FQ5D7uNDd6MnIOxR04rVDGYGAON3EITNNbxZchkQj9WhSXZINHSVJpJKSpWcZYyinYUsLkd-xBNAeIT8hbQCwX_NqqnI-
  7GaQkNEI0XdmU5YQ0cBUe1DsLXwztrv7liwKAPrfMqWg0heAgkbgYuluq_OVudwMqg9SDS_whzwKEZqSKw6DCndQZbo_jbAcCFS4vqlcc5DjVfXcSqqZ-
  D3yYs9AcFy8g",
  "scope": "CP00001",
  "token_type": "Bearer",
  "expires_in": 30
}

```

### Sample Error Response (HTTP Status Code 400)

Sample 1: When Agent JWT found expired (G1).

```

{
  "error_description": "JWT assertion is expired or invalid",
  "error": "invalid_grant"
}

```

Sample 2: When Machine Profile JWT found expired (G2).

```

{
  "error_description": "JWT has expired",
  "error": "invalid_client"
}

```

Sample 3: When Agent/Machine Profile JWT time found.

```

{
  "error_description": "JWT expiration time is unreasonable.",
  "error": "invalid_request"
}

```

Sample 4: When Agent Profile JWT found invalid/Not able to parse.

```

{
  "error_description": "JWT assertion is not valid",
  "error": "invalid_grant"
}

```

Sample 5: When Machine Profile JWT could not parse.

```

{
  "error_description": "Failed to parse json: Unexpected end-of-input in field name\n at [...]",
  "error": "server_error"
}

```

Sample 6: When client\_assertion\_type is not valid

```

{
  "error_description": "Client authentication failed",
  "error": "invalid_client"
}

```

Sample 7: When grant\_type value is not valid

```
{  
  "error_description": "Unknown Grant Type, urn:iETF:params:oauth:grant-type:jwt-bearer",  
  "error": "unsupported_grant_type"  
}
```

## 2.3.4 FINI API JWT Access Token

- If authentication is successful, AM server will return a FINI API JWT access token to API users. Each FINI API JWT access token has a validity of 30 seconds. Therefore, API users can reuse the same JWT access token to invoke FINI API's continuously until the access token expires. After the JWT access token expires, API users have to obtain a new access token from AM server again.
- The structure of the FINI API JWT access token is as follows:

### 2.3.4.1 Header

#	Name	Type	Sample Value	Description
1	typ	String	JWT	This specify the type of JWT.
2	kid	String	wU3iflIaLOUAReRB/FG6eM1P1QM=	The kid of server's public key signing the Access Token.
3	alg	String	RS256	This specifies the algorithm used for signing the Access Token.

**Sample Access Token Header Example**

```
{
  "typ": "JWT",
  "kid": "wU3iflIaLOUAReRB/FG6eM1P1QM=",
  "alg": "RS256"
}
```

### 2.3.4.2 Payload

Attributes defined in the FINI API JWT Access Token Payload:

#	Name	Type	Sample Value	Description
1	sub	String	<User>	This specify "sub" field of agent JWT.
2	cts	String	OAUTH2_STATELESS_GRANT	This specify the core token service.
3	auditTrackingId	String	123e724e-68e1-45dd-bc9c-7757b048bc6e-3351	This specify the Audit tracking id.
4	iss	String	https://openam.connect.hkex.com.hk/openam/oauth2/eu	This specify Agent issuer.Default value of "iss" will be like below. http://<CCAM >/openam/oauth2/eu
5	tokenName	String	access_token	This specify the token name.
6	token_type	String	Bearer	This specify the return token type.
7	authGrantId	String	30nsq6cTJZwcJ-MGKYBwCSGSRcg	This specify the authentication grant id.
8	aud	String	<Machine-UUID>	This specify subject of Machine profile JWT.
9	nbf	Number	1618307105	The "nbf" (not before) claim identifies the time before which the JWT MUST NOT be accepted for processing.
10	grant_type	String	urn:ietf:params:oauth:grant-type:jwt-bearer	This specify the Agent profile grant type.
11	scope	String[]	["CP00001"]	This specify scope associated with respective Machine profile. Company Id will be set as scope value.
12	auth_time	Number	-1	Time when the authentication has been performed.
13	realm	String	/	This specify the realm path.
15	exp	Number	1618310705	The "exp" (expiration time) claim identifies the expiration time on or after which the JWT MUST NOT be accepted for processing.

16	iat	Number	1618307105	The "iat" (issued at) claim identifies the time at which the JWT was issued.
17	expires_in	Number	30	This specify maximum time (Seconds) that the access token will be valid for use within the application.
18	jti	String	QbmfS_qm04ITprLHUtS8mVxw1Po	This specify JWT id. Each Access Token has unique jti.

**Sample Access Token (decoded) Example**

```
{
  "sub": "CP123456",
  "cts": "OAUTH2_STATELESS_GRANT",
  "auditTrackingId": "123e724e-68e1-45dd-bc9c-7757b048bc6e-3351",
  "iss": "https://openam.connect.hkex.com.hk/openam/oauth2",
  "tokenName": "access_token",
  "token_type": "Bearer",
  "authGrantId": "30nsq6cTJZwcJ-MGKYBwCSGSRcg",
  "aud": "0fd68f99-e64d-4544-b4d6-bcc1d7c12c1e",
  "nbf": 1618307105,
  "grant_type": "urn:ietf:params:oauth:grant-type:jwt-bearer",
  "scope": [
    "CP00001"
  ],
  "auth_time": -1,
  "realm": "/",
  "exp": 1618310705,
  "iat": 1618307105,
  "expires_in": 30,
  "jti": "QbmfS_qm04ITprLHUtS8mVxw1Po"
}
```

## 2.4 Invoke FINI APIs

### 2.4.1 HTTP Request

- To invoke FINI APIs, API user must send a valid and active FINI API JWT access token in the “Authorization” request header as bearer token.
- API users must not modify the contents of the access token when passing it to invoke a FINI API.
- Sample of FINI API JWT access token:

```
Bearer BNwWkbMD690HKLXhh0MOaQ0o3Hc
```

- The HTTP Request Headers are required to be set as follows:

Name	Description	Sample Value
Method	HTTP Method of the API request	GET or POST
Accept	Content type	application/json
Accept-Language	Client language	en-US
Authorization	FINI API JWT access token	Bearer eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4gRG9lIiwiaWF0IjoiYWRtaW4iOnRydWUsIm0aSI6Im5ZDg5MDc0LTl0NWQtNGQxNC04MzQ2LTl2MzQzYjdINTc2YyIsImhhdCI6ImTYxNDA0OTg1MSwiZXhwIjoxNjE0MDUzNDUxLjE0dneLj6LKSgHqXm8c

- The production domain name of FINI API endpoints will be provided in the next iteration.

### 2.4.2 HTTP Status Code

- FINI API Gateway will return one of the following HTTP status code after an API request is invoked:

Status Code	Status	Description
200	OK	The request has succeeded
400	Bad Request	Invalid request
401	Unauthorized	The FINI API JWT access token is invalid
403	Forbidden	The client does not have access rights to the content
404	Not Found	The server cannot find the requested resource
429	Too Many Requests	Rate limiting
500	Internal Server Error	Internal Server Error
503	Service Unavailable	API Service is not available
504	Gateway Timeout	Timeout at the API Gateway

### 3 End-to-End Encryption

API endpoints with Personal Identifiable Information (PII) must adopt end-to-end encryption for both request and responses on a data field level. The endpoints include:


- Add EIPO Subscription Entries (see [Section 7.1](#));
- Change EIPO Subscription Entries (see [Section 7.2](#));
- Invalidate EIPO Subscription Entries (see [Section 7.3](#)); and
- Enquire EIPO Subscription Entries (see [Section 7.4](#)).

Only the following PII data fields have to be encrypted in the API request and response, while other fields should not be encrypted:

- ID Type of the applicant (idType)
- Issuing authority of the applicant’s identification document (idCountryJurisdiction)
- ID number of the applicant’s identification document.(idNum)
- Full English name of the applicant (fullNameEng)
- Full Chinese or non-English name of the applicant (fullNameChi)

#### 3.1 Obtaining Crypto Metadata for Encryption

It is required to obtain Crpto Metadata, which includes FINI public key and Timestamp, for every API encryption request by calling Crypto Metadata Request API. The system sequence diagram below illustrates the data flow for obtaining crypto metadatafor encrypting API data fields:

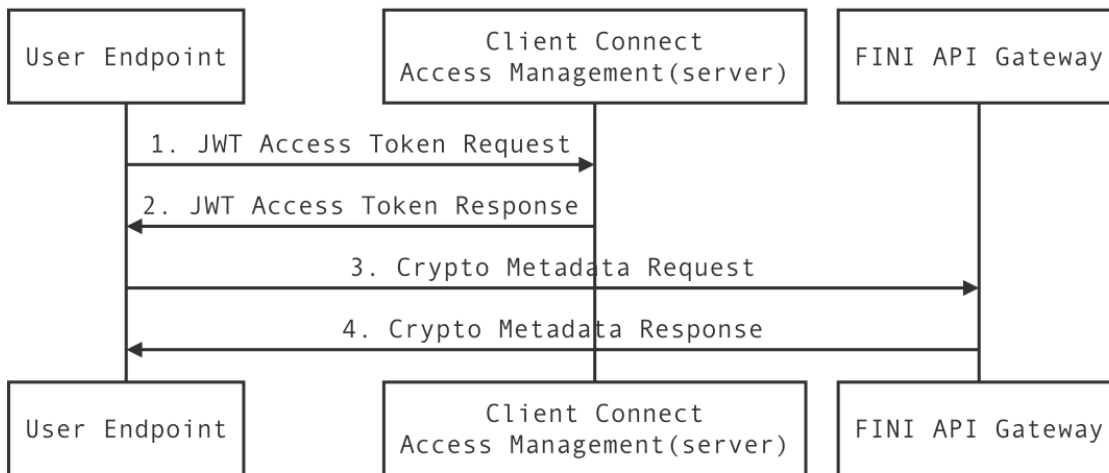

##### 3.1.1 Request

**GET** /api/crypto/meta

For invoking Crypto Metadata Request API, API user must obtain and send a valid and active FINI API JWT access token as described in [Section 2.3](#).

### 3.1.2 Response

#	Field	Type	Length	Description	Sample
1	code	String	6	0 to indicate 'successful response'.	0
2	message	String	100	Empty string, i.e. "" to indicate successful response.	
3	data	Object		The crypto metadata including the public key and timestamp	
3.1	publicKey	String	1000	The X.509 RSA public key to be used in FINI, encoded in base64 format	MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAuh/iUUOPQEk/2HzBNcFMprLMmp0Z/kUj69+eP2d03gkOFShOfb/wI2Nmm3m7fwl/oFfab2qQgj4+I0F4zJzL9pd+QXSU+dmeEokXMVZpeqCr1zDn4I66usFNC4NWQcP9XQpVxjmTzK6e1LOpEk3wvRyW+mGqAJqPJvmatVmYXKvpmHdaOXN9vdK15o6cYm5aEPg1+ih05+N+UI3QeEYjv3O/b7wpvExBr52w0Z6MELYeOEdWrvp7U3p8eJGaaXTLkoqemIBWKfCefxqcn/tgW4o/X6h0J38XhrQLULSGtPUBAl3B4mfH504HI3cdX7pqnsjikNnwWqfjew89z+gvFQIDAQAB
3.2	serverTimestamp	Integer	13	The FINI timestamp in Epoch milliseconds format	1640070861735


```
{
  "code": "0",
  "message": "",
  "data": {
    "publicKey": "MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAuh/iUUOPQEk/2HzBNcFMprLMmp0Z/kUj69+eP2d03gkOFShOfb/wI2Nmm3m7fwl/oFfab2qQgj4+I0F4zJzL9pd+QXSU+dmeEokXMVZpeqCr1zDn4I66usFNC4NWQcP9XQpVxjmTzK6e1LOpEk3wvRyW+mGqAJqPJvmatVmYXKvpmHdaOXN9vdK15o6cYm5aEPg1+ih05+N+UI3QeEYjv3O/b7wpvExBr52w0Z6MELYeOEdWrvp7U3p8eJGaaXTLkoqemIBWKfCefxqcn/tgW4o/X6h0J38XhrQLULSGtPUBAl3B4mfH504HI3cdX7pqnsjikNnwWqfjew89z+gvFQIDAQAB",
    "serverTimestamp": 1640070861735
  }
}
```

**Note:** The **publicKey** and **time difference** (in millisecond format) between FINI server time and API machine system time should be cached in the API machine's memory. The time difference is calculated by subtracting the FINI timestamp by API machine system time (in millisecond format).

### 3.2 Encrypting API Requests

The flowchart below illustrates the high-level workflow for encrypting API data fields:



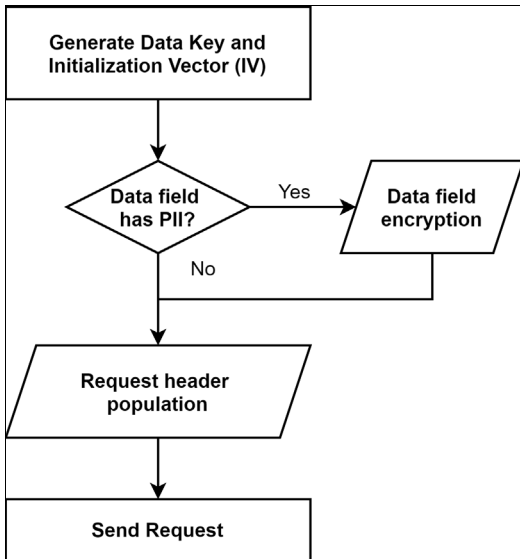

A pseudorandom number generator that generates outputs from a non-deterministic source is strongly recommended for the Data Key and Initialization Vector (IV) and encryption of the data payload.

Recommended library for Java:

Language	Library	Notes
Java	java.security.SecureRandom	In Java 8 or later, use SecureRandom.getInstanceStrong(). Meets RFC 4086's Random Requirements for Security.

### 3.2.1 Generate Data Key and Initialization Vector (IV)

A 32-byte **Data Key** ("DataKeyBase64Str") and 12-byte **IV** ("IVBase64Str") must be generated on the client side to encrypt the PII data fields in each API request and decrypt the PII data fields in the API response.

Field	Bytes	Description	Sample
DataKeyBase64Str	32	A <b>Data Key</b> that is cryptographically secure encoded in Base64 format.	lhJpZKbn9MnhWDz9UTPdNt6qllACKSWj4t1rN198QAg=
IVBase64Str	12	An <b>IV</b> that is cryptographically secure encoded in Base64 format.	aSdkeptMB9NXdYJx

Java implementation sample source code

```

int ivSize = 12;
byte[] iv = new byte[ivSize];
GCMParameterSpec ivKey;
SecretKey sKey;

// create a SecureRandom object for randomness
SecureRandom random = SecureRandom.getInstanceStrong();

// create Initialization Vector
random.nextBytes(iv);
ivKey = new GCMParameterSpec(128, iv);
String ivBase64Str = Base64.getEncoder().encodeToString(ivKey.getIV());

// create a KeyGenerator object with AES algorithm
KeyGenerator keyGen = KeyGenerator.getInstance("AES");
  
```

```
// generate Data Key
keyGen.init(256, random);
dataKey = keyGen.generateKey();
byte[] keyData = dataKey.getEncoded();

String dataKeyBase64Str = Base64.getEncoder().encodeToString(keyData);
```

### 3.2.2 Encrypting Data Fields

The data payload should be encrypted using the Data Key / IV, based on the following settings:

Configuration	Value
Algorithm	AES
Mode	GCM
Padding	NoPadding

The prefix **"%enc\_%"** should then be appended to the final encrypted value to indicate the value is encrypted. Empty string ("") is still required to be encrypted with the same algorithm, On the other hand, "null" data value does not need to be encrypted but will be included in generating the signed signature (X-FINI-SIGNATURE) header of the message.

**Unencrypted** sample request from the 7.1 Add EIPO Subscription Entries API endpoint (**red text** = to be encrypted):

```
{
  "data": [{
    "requestID": 1,
    "ipoID": "1234",
    "idList": [{
      "idType": "1",
      "idCountryJurisdiction": "HKG",
      "idNum": "M011336(5)",
      "fullNameEng": "Annabelle Wang",
      "fullNameChi": "汪會夢"
    }],
    "appQuantity": "1000",
    "firmID": "00000",
    "ownRef": "f992b5c2-fd16-4e57-8387-738cb7aa75fb"
  }
]
}
```



			<table border="1"> <tr> <td></td> <td>348wgYfXjbfQ6iV3lwjKoeUJG O2fy15zUwTLqohIV5cCjFA116 Xvko0nnQcvi4vRiUfwVQuP2Ii kO/6PVnXg==</td> </tr> </table>		348wgYfXjbfQ6iV3lwjKoeUJG O2fy15zUwTLqohIV5cCjFA116 Xvko0nnQcvi4vRiUfwVQuP2Ii kO/6PVnXg==												
	348wgYfXjbfQ6iV3lwjKoeUJG O2fy15zUwTLqohIV5cCjFA116 Xvko0nnQcvi4vRiUfwVQuP2Ii kO/6PVnXg==																
3	X-FINI-REQUEST-ID	<p><b>Unique ID</b> generated under the GUID v4 standard without any hyphens. FINI will reject any duplicate Request ID in the same day.</p>	26219512b1da421eafc8560638ff69af														
4	X-FINI-TIMESTAMP	<p><b>Request timestamp</b> calculated as the sum between:</p> <ul style="list-style-type: none"> <li>▪ <b>Time difference</b> in millisecond format between the local / server timestamps in the Crypto Metadata Response (<i>Section 3.1.2</i>)</li> <li>▪ <b>Local timestamp</b> in millisecond format</li> </ul>	<p>Step-by-step construction per below:</p> <table border="1"> <tr> <td><b>Time difference</b></td> <td>15</td> </tr> <tr> <td><b>Local timestamp</b></td> <td>1641264153167</td> </tr> <tr> <td><b>X-FINI-TIMESTAMP value</b></td> <td>1641264153182</td> </tr> </table>	<b>Time difference</b>	15	<b>Local timestamp</b>	1641264153167	<b>X-FINI-TIMESTAMP value</b>	1641264153182								
<b>Time difference</b>	15																
<b>Local timestamp</b>	1641264153167																
<b>X-FINI-TIMESTAMP value</b>	1641264153182																
5	X-FINI-SIGNATURE	<p><b>Signed signature</b> in base64 format, as the concatenation of the following values:</p> <ul style="list-style-type: none"> <li>▪ <b>String body of the encrypted fields</b></li> <li>▪ <b>X-FINI-REQUEST-ID</b></li> <li>▪ <b>X-FINI-TIMESTAMP</b></li> </ul> <p>The signature should then be encrypted under the following configurations:</p> <table border="1"> <thead> <tr> <th>Configuration</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Algorithm</td> <td>HMACSHA256</td> </tr> <tr> <td>Signature Key</td> <td><b>Data Key</b> from <i>Section 3.2.1</i></td> </tr> </tbody> </table>	Configuration	Value	Algorithm	HMACSHA256	Signature Key	<b>Data Key</b> from <i>Section 3.2.1</i>	<p>Step-by-step construction per below:</p> <table border="1"> <tr> <td><b>Encrypted payload</b></td> <td>{ "data": { "requestID": "1", "ipoid": "1234", "idList": { "idType": "%enc_eapFkonN3fzIDdSEkiD9EQg=", "idCountryJurisdiction": "%enc_%ACzvoa5ZmoiXFScyhNbRKtxUgw=", "idNum": "%enc_%BVeZ9hPEphW7EeSiE2UMP6bnM/QbkiYusbM=", "fullNameEng": "%enc_%CQnGpkKS/FHrGOMgkJROsmXZe+kEXEZ61hEcNn/P", "fullNameChi": "%enc_%rtYClbx0dZksk9K1QLpNT3zAjRi2YaZuWQ==" }, "appQuantity": "1000", "firmID": "00000", "ownRef": "f992b5c2-fd16-4e57-8387-738cb7aa75fb" } }</td> </tr> <tr> <td><b>X-FINI-REQUEST-ID</b></td> <td>26219512b1da421eafc8560638ff69af</td> </tr> <tr> <td><b>X-FINI-TIMESTAMP</b></td> <td>1641264153182</td> </tr> <tr> <td><b>Header value (after hasing and encryption)</b></td> <td>JcKBK3rJwmVlqjKE7+EisQpsu4KNtHt3Mzrwtx+0Q4E=</td> </tr> </table>	<b>Encrypted payload</b>	{ "data": { "requestID": "1", "ipoid": "1234", "idList": { "idType": "%enc_eapFkonN3fzIDdSEkiD9EQg=", "idCountryJurisdiction": "%enc_%ACzvoa5ZmoiXFScyhNbRKtxUgw=", "idNum": "%enc_%BVeZ9hPEphW7EeSiE2UMP6bnM/QbkiYusbM=", "fullNameEng": "%enc_%CQnGpkKS/FHrGOMgkJROsmXZe+kEXEZ61hEcNn/P", "fullNameChi": "%enc_%rtYClbx0dZksk9K1QLpNT3zAjRi2YaZuWQ==" }, "appQuantity": "1000", "firmID": "00000", "ownRef": "f992b5c2-fd16-4e57-8387-738cb7aa75fb" } }	<b>X-FINI-REQUEST-ID</b>	26219512b1da421eafc8560638ff69af	<b>X-FINI-TIMESTAMP</b>	1641264153182	<b>Header value (after hasing and encryption)</b>	JcKBK3rJwmVlqjKE7+EisQpsu4KNtHt3Mzrwtx+0Q4E=
Configuration	Value																
Algorithm	HMACSHA256																
Signature Key	<b>Data Key</b> from <i>Section 3.2.1</i>																
<b>Encrypted payload</b>	{ "data": { "requestID": "1", "ipoid": "1234", "idList": { "idType": "%enc_eapFkonN3fzIDdSEkiD9EQg=", "idCountryJurisdiction": "%enc_%ACzvoa5ZmoiXFScyhNbRKtxUgw=", "idNum": "%enc_%BVeZ9hPEphW7EeSiE2UMP6bnM/QbkiYusbM=", "fullNameEng": "%enc_%CQnGpkKS/FHrGOMgkJROsmXZe+kEXEZ61hEcNn/P", "fullNameChi": "%enc_%rtYClbx0dZksk9K1QLpNT3zAjRi2YaZuWQ==" }, "appQuantity": "1000", "firmID": "00000", "ownRef": "f992b5c2-fd16-4e57-8387-738cb7aa75fb" } }																
<b>X-FINI-REQUEST-ID</b>	26219512b1da421eafc8560638ff69af																
<b>X-FINI-TIMESTAMP</b>	1641264153182																
<b>Header value (after hasing and encryption)</b>	JcKBK3rJwmVlqjKE7+EisQpsu4KNtHt3Mzrwtx+0Q4E=																
6	X-FINI-ENCRYPTION-CLIENT	<p><b>A field to indicate the request includes an encrypted payload.</b></p> <p>If the request doesn't include an encrypted payload, the header is not required.</p>	YES														

### Java implementation sample source code for generating X-FINI-ENCRYPTED-KEY header

```
//Concatenation of Data Key and IV (delimited by #), X-FINI-ENCRYPTED-KEY
String e_key_str = dataKeyBase64Str + "#" + ivBase64Str;

// Generate X-FINI-ENCRYPTED-KEY header
Cipher cipher = Cipher.getInstance("RSA");
cipher.init(Cipher.ENCRYPT_MODE, getPublicKey(publicKeyFINI));
byte[] eBytes = cipher.doFinal(e_key_str.getBytes());
String X_FINI_ENCRYPTED_KEY = Base64.getEncoder().encodeToString(eBytes);
```

### Java implementation sample source code for generating X-FINI-SIGNATURE header

```
// Generate X-FINI-SIGNATURE header

String algorithm = "HMACSHA256";
byte[] keyBytes = Base64.getDecoder().decode(dataKeyBase64Str);
Key key = new SecretKeySpec(keyBytes, 0, keyBytes.length, algorithm);
Mac mac = Mac.getInstance(algorithm);
mac.init(dataKeyBase64Str);

String X_FINI_SIGNATURE = Base64.getEncoder().encodeToString(mac.doFinal((payload + requestID + timestamp) .getBytes()));
```

### 3.3 Decrypting API Responses

This section covers the step-by-step workflow for decrypting API responses containing encrypted data fields

#### 3.3.1 Verify Signature

Before decrypting any fields, you should verify signature first. Compare **Local Signature** ("localSignature") and **Remote Signature** ("remoteSignature"), **if the 2 signatures do not match, it indicates a tampered response.**

Field	Description	Sample
localSignature	Computed by signing the response body using HMACSHA1, with the <b>Data Key</b> ( <a href="#">Section 3.1.2</a> ) as the signature key	ij0GF6CE7RK2KDPL39UxvxBMSYdQth1M5RpCihQUImk=
remoteSignature	Obtain the value from response header <b>X-FINI-SIGNATURE</b>	ij0GF6CE7RK2KDPL39UxvxBMSYdQth1M5RpCihQUImk=

#### 3.3.2 Decrypt Response Body

An API response with the field **"X-FINI-ENCRYPTION-SERVER"** implies a response body with encrypted fields.

Sample response from the 7.4 Enquire EIPO Subscription Entries API endpoint (**red text** = encrypted fields):

```
{
  "code": "0",
  "message": "",
  "data": [{
    "stkCode": "9988",
    "isin": "KYG017191142",
    "status": "25",
    "subFlowStatus": "3",
    "recordID": "2462303930948573A ",
    "idList": [{
      "idType": "%enc_%eapFkonN3fzIDdSEkiD9EQg=",
      "idCountryJurisdiction": "%enc_%ACzvoa5ZmoiXFScyhNbRKtxUgw==",
      "idNum": "%enc_%CVaa9BTCphW3EeMJV/bYQyR4JnsJbluxoAI=",
      "fullNameEng": "%enc_%Cw/JqQCj8VSuddUvgb64LzNdhVcNoMvts2a+w==",
      "fullNameChi": "%enc_%of4bloRQdqsJKkXZ1yd4okbiVffjc4oMhg=="
    }],
    "appQuantity": "1000",
    "allotQuantity": "100",
    "firmID": "00000",
    "ownRef": null,
    "unsuccessfulReason": "0",
    "intDuplicateIndicator": "0",
    "exception": []
  }],
  "totalSize": 1,
  "timestamp": "2021-08-26 12:30:29",
  "nextCursor": "0",
  "exception": []
}
```

Each encrypted field should have its prefix "%enc\_%" removed, then decrypted using the **Data Key** and **IV** ([Section 3.1.2](#)) with the following configurations:

Configuration	Value
Algorithm	AES
Mode	GCM
Padding	NoPadding

Worked example using the "fullNameEng" field (**red text** = encrypted value):

Encrypted field in API response	"fullNameEng": "%enc_%Cw/JqQCj8VSuddUvGb64LzNdhVcNoMVtvs2a+w=="
Encrypted value	<b>Cw/JqQCj8VSuddUvGb64LzNdhVcNoMVtvs2a+w==</b>
Decrypted Value	Chan Tai Man

Java implementation sample source code

```
// Decrypt data field
SecretKeySpec secretKeySpec = new SecretKeySpec(dataKey.getEncoded(), "AES");

Cipher cipher = Cipher.getInstance("AES/GCM/NoPadding");
cipher.init(Cipher.DECRYPT_MODE, secretKeySpec, ivKey);
String encryptedTextValue = Base64.getDecoder().decode(encryptedTextValueBase64);
byte[] decryptedByteArray = cipher.doFinal(encryptedTextValue);
String decryptedValue = new String(decryptedByteArray);
```

### 3.4 End-to-End Encryption Error Codes and Messages

If the encryption API request is not submitted correctly with the required headers or data, errors will occur during end-to-end encryption or decryption processing in FINI. The following is a list of error codes and messages which may be returned in FINI API response due to incorrect encryption API request:

Code	Message
411001	Missing X-FINI-REQUEST-ID in the header
411002	Duplicate Request ID
411003	Missing X-FINI-TIMESTAMP in the header
411004	Request timestamp expired
411005	Missing X-FINI-SIGNATURE in the header
411006	Missing X-FINI-ENCRYPTED-KEY in the header
411007	Public key is wrong, FINI can't decrypt the encrypted key, please re-fetch crypto meta
411008	Signature error
411009	No such field {json_key}
411010	Cipher text format is wrong
411011	FINI can't decrypt the cipher text of the field {json_key}
411999	Crypto process exception

## 4 Formats and Conventions

### 4.1 Identifiers

#### 4.1.1 IPOs

- IPOs are identified using an **ipoID** ("ipoID"), which is different from an IPO's Stock Code ("stkCode") or **ISIN** ("isin"). The design is intended to avoid situations where Stock Codes and ISINs are being reused, e.g. an IPO relaunching under different IPO cases within a short period of time. The use of ipoIDs is unique to the FINI API Gateway, and the identifiers can be queried through the Enquire IPO List API endpoint.

```
/api/ipos/refdata/v1?ipoID=1234
```

#### 4.1.2 EIPO Subscriptions

- EIPO subscriptions are identified using a **Record ID** ("recordID"), which is a globally unique reference number generated by the system upon successful validation and submission. It contains: (i) a 16-digit integer; and (ii) a suffix indicating the method through which the subscription is created.<sup>4</sup>

```
/api/eipo/subscriptions/query/v1?recordID=2486466216549731A
```

#### 4.1.3 EIPO Funding

- Each HKSCC Participant's EIPO subscription list within an IPO is identified using a Transaction Reference ("transactionRef"). Each reference is a globally unique reference number generated by the system upon an HKSCC Participant making a first subscription within an IPO. It contains a 13-digit integer.

```
/api/eipo/funding/query/v1?transactionRef=5224703318532
```

---

<sup>4</sup> "O" = Online input, "B" = Bulk upload, and "A" = API.



## 4.2 Data Formats

All request and response fields are determined by a data type and max length:

Type	Length	Description	Example																		
String	[n]	Field with alphanumeric characters of $n$ characters, fully UTF-8 encoded. <sup>(1)</sup>	<p>Request field "fullName" has the following parameters:</p> <table border="1"> <thead> <tr> <th>Format</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>String</td> <td>20</td> </tr> </tbody> </table> <p>Successful examples:</p> <ul style="list-style-type: none"> <li>"fullName": "David Chan Tai Man"</li> <li>"fullName": "陳大文"</li> </ul> <p>Unsuccessful examples:</p> <ul style="list-style-type: none"> <li>"fullName": "David Chan Tai Man FOO" (exceeds length)</li> <li>"fullName": "David Chan Tai Man ❖" (invalid character)</li> </ul>	Format	Length	String	20														
Format	Length																				
String	20																				
Integer	[n]	<p>Field with numeric characters of up to <math>n</math> digits.</p> <p>The FINI API Gateway supports all unsigned 64-bit integers, with a range between 0 and 18446744073709551615.</p> <p>Certain numeric fields are classified as string, as their sizes may</p>	<p>Request field "pageSize" has the following parameters:</p> <table border="1"> <thead> <tr> <th>Format</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>Integer</td> <td>18</td> </tr> </tbody> </table> <p>Successful examples:</p> <ul style="list-style-type: none"> <li>"pageSize": 9</li> <li>"pageSize": 18446744073709551614</li> </ul> <p>Unsuccessful examples:</p> <ul style="list-style-type: none"> <li>"pageSize": 18446744073709551616 (overflow)</li> <li>"pageSize": -1 (underflow)</li> </ul>	Format	Length	Integer	18														
Format	Length																				
Integer	18																				
Decimal	[n1],[n2]	<p>Field with an integer component (<math>n1 - n2</math>) and a decimal component (<math>n2</math>), separated by a comma.</p> <p>The decimal component (<math>n2</math>) is the max number of digits after the separator.</p> <p>The integer component (<math>n1</math>) - the decimal component (<math>n2</math>) is the max number of digits before the separator/</p>	<p>Request field "priceMax" has the following parameters:</p> <table border="1"> <thead> <tr> <th>Format</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>Decimal</td> <td>12,3</td> </tr> </tbody> </table> <p>Numerical range:</p> <ul style="list-style-type: none"> <li>Min: 0.000</li> <li>Max: 999999999.999</li> </ul>	Format	Length	Decimal	12,3														
Format	Length																				
Decimal	12,3																				
Array	[n]	Field holding $n$ variables, separated by commas (",") and enclosed by square brackets ("[" and "]")	<p>Request field "idList" has the following parameters:</p> <table border="1"> <thead> <tr> <th>#</th> <th>Field</th> <th>Format</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>idList</td> <td>Array</td> <td>2</td> </tr> <tr> <td></td> <td>1.1</td> <td>idType</td> <td>String</td> <td>2</td> </tr> <tr> <td></td> <td>1.2</td> <td>idNum</td> <td>String</td> <td>10</td> </tr> </tbody> </table>	#	Field	Format	Length	1	idList	Array	2		1.1	idType	String	2		1.2	idNum	String	10
#	Field	Format	Length																		
1	idList	Array	2																		
	1.1	idType	String	2																	
	1.2	idNum	String	10																	

			<p>Successful example:</p> <pre>"idList":[     {       "idType":"2",       "idNum":"GJ377364"},     {       "idType":"2",       "idNum":"RQ347486"}   ]</pre> <p>Unsuccessful example:</p> <pre>"idList":[     {       "idType":"2",       "idNum":"GJ377364"},     {       "idType":"2",       "idNum":"RQ347486"},     {       "idType":"2",       "idNum":"XX323346"}   ]</pre>
--	--	--	--

(1) Unless specified, the all UTF-8 characters should be accepted, with the exception of the following characters / character sets:

Unicode	Description
1F000-1F02F	Mahjong Tiles
1F030-1F09F	Domino Tiles
1F0A0-1F0FF	Playing Cards
1F100-1F1FF	Enclosed Alphanumeric Supplement
1F200-1F2FF	Enclosed Ideographic Supplement
1F300-1F5FF	Miscellaneous Symbols and Pictographs
1F600-1F64F	Emoticons (Emoji)
1F650-1F67F	Ornamental Dingbats
1F680-1F6FF	Transport and Map Symbols
1F700-1F77F	Alchemical Symbols
1F780-1F7FF	Geometric Shapes Extended
1F800-1F8FF	Supplemental Arrows-C
1F900-1F9FF	Supplemental Symbols and Pictographs
1FA00-1FA6F	Chess Symbols
1FA70-1FAFF	Symbols and Pictographs Extended-A
1FB00-1FBFF	Symbols for Legacy Computing
E0000-E007F	Tags
E0100-E01EF	Variation Selectors Supplement
F0000-FFFFF	Supplementary Private Use Area-A
100000-10FFF	FFSupplementary Private Use Area-B
005B	Left Square Bracket "["
005D	Right Square Bracket "]"
005E	Circumflex Accent "^"

## 4.3 Request Field Conventions

### 4.3.1 Leading/Trailing Spaces

- All request fields with leading or trailing spaces are trimmed before validation and processing

#### Example 1: Trailing spaces exceeding field length

- Request field "fullName" has the following parameters:

Type	Length
String	20

The following request would be successfully processed:

#### Request

```
"fullName":"Mary Lee Sum See  "
```

 <- field length of 21 string characters

#### Response

```
"fullName":"Mary Lee Sum See"
```

 <- field trimmed to 16 string characters

#### Example 2: Matched field after trimming trailing spaces

- A GET API endpoint uses "stkCode" as a primary key to enquire other fields ("priceMin", "priceMax" and "priceFinal"), and has the following parameters:

Type	Length
String	10

The following request would be successfully processed:

#### Database

```
"stkCode":"9988"  
"priceMin":1.1  
"priceMax":1.5  
"priceFinal":null
```

#### Request

```
"stkCode":"9988  "
```

 <- matches "stkCode":"9988" after trimming

#### Response

```
"data":{  
    "stkCode":"9988",  
    "priceMin":1.1  
    "priceMax":1.5  
    "priceFinal":null  
}
```

 <- successful response

### Example 3: Leading spaces exceeding field length

- Request field "idType" uses an ID Code (digits 1-8) and has the following parameters:

Type	Length
String	2

The following request would be successfully processed:

#### Request

"idType": " 1" <- field with 2 leading spaces and 1 digit

#### Response

"idType": "1" <- field trimmed to 1 digit

### Example 4: Matched field after trimming leading and trailing spaces

- Request field "idType" uses an ID Code (digits 1-8) and has the following parameters:

Type	Length
String	2

The following request would be successfully processed:

#### Request

"idType": " 1 " <- field with 2 leading/trailing spaces and 1 digit

#### Response

"idType": "1" <- field trimmed to 1 digit

## 4.3.2 Irrelevant Fields

- Irrelevant fields are ignored by the FINI API Gateway without any processing

#### Example:

- A GET API endpoint has the following URI (assume both are mandatory fields):

GET /api/ipos/v1?size={integer}&nextCursor={string}

The following request would be successfully processed:

#### Request

GET /api/ipos/v1?size=10&nextCursor=abc&food=Delicious <- redundant field **food=Delicious**

#### Outcome

- ✓ Both **size** and **nextCursor** fields are processed, ignoring **food**

### 4.3.3 Repeated Fields

- Repeated fields will only have its first instance validated and processed by the FINI API Gateway

#### Example 1: All repeated fields are valid

- A GET API endpoint has the following URI (assume both are mandatory fields):

```
GET /api/ipos/v1?size={integer}&nextCursor={string}
```

The following request would be successfully processed:

#### Request

```
GET /api/ipos/v1?size=10&nextCursor=abc&size=100
```

 <- repeated **size** field

#### Outcome

- ✓ Processed as **size=10**, **size=100** is ignored

#### Example 2: First instance is invalid, repeated instance(s) are valid

- A GET API endpoint has the following URI (assume both are mandatory fields):

```
GET /api/ipos/v1?size={integer}&nextCursor={string}
```

The following request would be successfully processed:

#### Request

```
GET /api/ipos/v1?size=abc&nextCursor=abc&size=100
```

 <- first repeated **size** field

#### Outcome

- X Processed as **size=abc**, **size=100** is ignored. API request is rejected for being invalid.

#### Example 3: First instance valid, repeated fields are invalid

- A GET API endpoint has the following URI (assume both are mandatory fields):

```
GET /api/ipos/v1?size={integer}&nextCursor={string}
```

The following request would be successfully processed:

#### Request

```
GET /api/ipos/v1?size=10&nextCursor=abc&size=infinite
```

 <- repeated **size** field

#### Outcome

- ✓ Processed as **size=10**, **size=infinite** is ignored

### 4.3.4 Optional Fields

- Optional fields that are not provided will be treated as null

#### Example:

- A POST API endpoint has the following request fields:

Field	Required?	Type	Length
fullName	Mandatory	String	20
idNum	Mandatory	String	10
ownRef	Optional	String	20

The following request would be successfully processed:

#### Request

```
"data":{  
    "fullName":"Company ABC"  
    "idNum":"KM21512456"  
}
```

<- ownRef not provided

#### Response

```
"code":"0"  
"message": ""  
[...]
```

<- "code":"0" to indicate successful processing

#### Database

```
"fullName":"Company ABC"  
"idNum":"KM21512456"  
"ownRef":null
```

<- ownRef will be stored as null

## 4.4 Response Field Conventions

### 4.4.1 Empty Fields, Arrays and Objects

- Empty response fields will be treated as follows:
  - **Strings, integers and decimals** – null
  - **Array of an object** – empty array []
  - **Object** – empty object {}

#### Example:

- A GET API endpoint has the following response fields:

Field	Type	Length
idList	Array	4
idNum	String	10

If both fields are blank, the following response would be provided:

#### Response

```
"data":{
  "idList":[]
  "idNum":null
}
```

<- "idList" returns an empty array, and "idNum" returns null

### 4.4.2 Successful Responses

- All successful responses are indicated with a "0" in code ("code":"0") and empty string in message ("message":"")

#### Successful example:

#### Response

```
{
  "code":"0",
  "message":"",
  "data":{
    "stkCode":"9988",
    "status":"40",
    "companyEngFull":"Alibaba Group Holding Limited"
  },
  "exception":[]
}
```

#### Unsuccessful example:

#### Response

```
{
  "code":"400000",
  "message":"Invalid Parameters",
  "data":{},
  "exception":[{"recordErrorCode":"401900",
    "recordErrorMsg":"Invalid size format (must be an unsigned 64-bit integer)"}]
}
```

## 5 API Endpoints

### 5.1 Overview

The FINI API Gateway operates based on 3 main categories:

Category	Required function in ForgeRock	Description
/api/ipos/*	EU_finiIPORefDataAPI	API endpoints for <b>all FINI users</b> that return data on the specific IPO-related reference data, such as the stock code, offer size and price information
/api/eipo/subscriptions/*	EU_finiPOSubAPI	API endpoints for <b>HKSCC Participants users</b> to operate public offer subscriptions in the EIPO Channel, which includes add, change, invalidate and enquire subscriptions
/api/eipo/funding/*	EU_finiPOFundAPI	API endpoints for <b>EIPO Designated Bank users</b> to operate EIPO funding-related functions, such as confirm and enquire funding statuses.

The 3 main categories cover to 8 API endpoints within the FINI API Gateway:

API endpoint	Function	Method	Description
/api/ipos/list/v1	Enquire IPO List	GET	Returns a list of IPO(s) available on FINI.
/api/ipos/refdata/v1	Enquire IPO Reference Data	GET	Returns the latest full set of reference data of a requested IPO.
/api/eipo/subscriptions/add/v1	Add EIPO Subscription Entries	POST	Allows users to add EIPO entries to IPOs that are open for subscription.
/api/eipo/subscriptions/change/v1	Change EIPO Subscription Entries	POST	Allows users to amend existing EIPO entries recorded on FINI.
/api/eipo/subscriptions/invalidate/v1	Invalidate EIPO Subscription Entries	POST	Allows users to cancel existing EIPO entries recorded on FINI. No deletion is performed.
/api/eipo/subscriptions/query/v1	Enquire EIPO Subscription Entries	POST	Returns a list of EIPO subscription(s) based on an IPO or by specific Record IDs.
/api/eipo/funding/confirm/v1	Confirm EIPO Funding	POST	Allows users to confirm or reject the pre-funding related to an HKSCC Participant's EIPO subscription list.
/api/eipo/funding/query/v1	Enquire EIPO Funding	POST	Returns a list of HKSCC Participants' pre-funding requirements based on an IPO or by specific Transaction References.

### 5.2 Throttles

- The FINI API Gateway imposes request throttling with a threshold that refreshes every 60 seconds. Each company registered on HKEX Client Connect is subject to a threshold of **480 requests per 60 seconds**.
- A global throttle is also applied for each API endpoint, based on the expected peak traffic. It is strongly recommended that API machines do not exceed **60 requests per 60 seconds** to avoid triggering the API Gateway's throttles.



## 6 IPO Reference Data

### 6.1 Enquire IPO List

#### 6.1.1 Request

**GET** /api/ipos/list/v1

#	Field	Type	Length	Required	Description
1	size	Integer	18	No	Expected page size of the API response. Must be between 1 and 1,000. If null or blank, default as 100.
2	nextCursor	String	20	Yes	Key reference (ipolD) from which the response message should start. "0" should be used to start from the first index.

GET /api/ipos/list/v1?size=5&nextCursor=0

#### 6.1.2 Response

#	Field	Type	Length	Description																								
1	code	String	6	0 to indicate 'successful response'.																								
2	message	String	100	Empty string, i.e. "" to indicate successful response.																								
3	data	Array																										
3.1	ipolD	String	20	A unique, sequentially-generated value assigned to each IPO case stored on FINI. Used as the identifier for IPOs within the FINI API Gateway.																								
3.2	stkCode	String	10	The IPO's stock code.																								
3.3	isin	String	12	The IPO's ISIN.																								
3.4	status	String	2	The status of the IPO, expressed in status codes: <table border="1" data-bbox="735 1216 1436 1527"> <thead> <tr> <th>Status</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>Deal Initiated</td> </tr> <tr> <td>30</td> <td>Public Offer Closed</td> </tr> <tr> <td>35</td> <td>Application Validated</td> </tr> <tr> <td>45</td> <td>Allotment Confirmed</td> </tr> <tr> <td>50</td> <td>Money Settlement</td> </tr> <tr> <td>55</td> <td>Allocation Confirmed</td> </tr> <tr> <td>60</td> <td>Placing Approved</td> </tr> <tr> <td>65</td> <td>Allotment Results Approved</td> </tr> <tr> <td>70</td> <td>Trading Started</td> </tr> <tr> <td>80</td> <td>Suspended</td> </tr> <tr> <td>90</td> <td>Cancelled</td> </tr> </tbody> </table>	Status	Description	25	Deal Initiated	30	Public Offer Closed	35	Application Validated	45	Allotment Confirmed	50	Money Settlement	55	Allocation Confirmed	60	Placing Approved	65	Allotment Results Approved	70	Trading Started	80	Suspended	90	Cancelled
Status	Description																											
25	Deal Initiated																											
30	Public Offer Closed																											
35	Application Validated																											
45	Allotment Confirmed																											
50	Money Settlement																											
55	Allocation Confirmed																											
60	Placing Approved																											
65	Allotment Results Approved																											
70	Trading Started																											
80	Suspended																											
90	Cancelled																											
4	totalSize	Integer	18	Total size of the API response.																								
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.																								
6	nextCursor	String	20	The key reference (ipolD) immediately after the final result of response. If there are no further records, "0" will be returned.																								
7	exception	Array		To indicate whether the entire request failed any validation checks: <ul style="list-style-type: none"> <li>Empty array = no error(s) were identified across the entire request</li> <li>Non-empty array = the entire request was rejected due to a single or multiple error(s), with each error expressed as an individual object</li> </ul>																								
7.1	recordErrorCode	String	6																									
7.2	recordErrorMsg	String	100																									

```
{
  "code": "0",
  "message": "",
  "data": [
    {
      "ipoID": "1234",
      "stkCode": "9988",
      "isin": "KYG017191142",
      "status": "25"
    },
    {
      "ipoID": "1235",
      "stkCode": "9633",
      "isin": "CNE100004272",
      "status": "30"
    },
    {
      "ipoID": "1236",
      "stkCode": "9618",
      "isin": "KYG8208B1014",
      "status": "45"
    },
    {
      "ipoID": "1237",
      "stkCode": "6618",
      "isin": "KYG5074A1004",
      "status": "60"
    },
    {
      "ipoID": "1238",
      "stkCode": "1024",
      "isin": "KYG532631028",
      "status": "70"
    }
  ],
  "totalSize": 5,
  "timeStamp": "2021-08-25 16:22:13",
  "nextCursor": "11",
  "exception": []
}
```

## 6.2 Enquire IPO Reference Data

### 6.2.1 Request

**GET** /api/ipos/refdata/v1

#	Field	Type	Length	Required	Description
1	ipoID	String	20	Yes	Must be a valid ipoID from the Enquire IPO List API endpoint.

GET /api/ipos/refdata/v1?ipoID=1234

### 6.2.2 Response

#	Field	Type	Length	Description																																		
1	code	String	6	0 to indicate 'successful response'.																																		
2	message	String	100	Empty string, i.e. "" to indicate successful response.																																		
3	data	Array																																				
3.1	ipoID	String	20	The unique identifier assigned to the IPO case.																																		
3.2	stkCode	String	10	The IPO's stock code.																																		
3.3	Status	String		The status of the IPO, expressed in status codes: <table border="1"><thead><tr><th>Status</th><th>Description</th></tr></thead><tbody><tr><td>25</td><td>Deal Initiated</td></tr><tr><td>30</td><td>Public Offer Closed</td></tr><tr><td>35</td><td>Application Validated</td></tr><tr><td>45</td><td>Allotment Confirmed</td></tr><tr><td>50</td><td>Money Settlement</td></tr><tr><td>55</td><td>Allocation Confirmed</td></tr><tr><td>60</td><td>Placing Approved</td></tr><tr><td>65</td><td>Allotment Results Approved</td></tr><tr><td>70</td><td>Trading Started</td></tr><tr><td>80</td><td>Suspended</td></tr><tr><td>90</td><td>Cancelled</td></tr></tbody></table>	Status	Description	25	Deal Initiated	30	Public Offer Closed	35	Application Validated	45	Allotment Confirmed	50	Money Settlement	55	Allocation Confirmed	60	Placing Approved	65	Allotment Results Approved	70	Trading Started	80	Suspended	90	Cancelled										
Status	Description																																					
25	Deal Initiated																																					
30	Public Offer Closed																																					
35	Application Validated																																					
45	Allotment Confirmed																																					
50	Money Settlement																																					
55	Allocation Confirmed																																					
60	Placing Approved																																					
65	Allotment Results Approved																																					
70	Trading Started																																					
80	Suspended																																					
90	Cancelled																																					
3.4	companyEngFull	String	80	The IPO's company full English name.																																		
3.5	companyEngShort	String	15	The IPO's company short English name.																																		
3.6	companyChiFull	String	80	The IPO's company full Chinese name.																																		
3.7	companyChiShort	String	8	The IPO's company short Chinese name.																																		
3.8	placeOfCorp	String	2	The IPO company's place of incorporation, expressed by location codes: <table border="1"><thead><tr><th>Code</th><th>Description</th></tr></thead><tbody><tr><td>1</td><td>Bermuda</td></tr><tr><td>2</td><td>Cayman Islands</td></tr><tr><td>3</td><td>Hong Kong, China</td></tr><tr><td>4</td><td>People's Republic of China</td></tr><tr><td>5</td><td>Australia</td></tr><tr><td>6</td><td>British Virgin Islands</td></tr><tr><td>7</td><td>Canada – Alberta</td></tr><tr><td>8</td><td>Canada – British Columbia</td></tr><tr><td>9</td><td>Canada – Ontario</td></tr><tr><td>10</td><td>England</td></tr><tr><td>11</td><td>Israel</td></tr><tr><td>12</td><td>Italy</td></tr><tr><td>13</td><td>Japan</td></tr><tr><td>14</td><td>Jersey</td></tr><tr><td>15</td><td>Luxembourg</td></tr><tr><td>16</td><td>Singapore</td></tr></tbody></table>	Code	Description	1	Bermuda	2	Cayman Islands	3	Hong Kong, China	4	People's Republic of China	5	Australia	6	British Virgin Islands	7	Canada – Alberta	8	Canada – British Columbia	9	Canada – Ontario	10	England	11	Israel	12	Italy	13	Japan	14	Jersey	15	Luxembourg	16	Singapore
Code	Description																																					
1	Bermuda																																					
2	Cayman Islands																																					
3	Hong Kong, China																																					
4	People's Republic of China																																					
5	Australia																																					
6	British Virgin Islands																																					
7	Canada – Alberta																																					
8	Canada – British Columbia																																					
9	Canada – Ontario																																					
10	England																																					
11	Israel																																					
12	Italy																																					
13	Japan																																					
14	Jersey																																					
15	Luxembourg																																					
16	Singapore																																					

				<table border="1"> <tr> <td>17</td> <td>US - Delaware</td> </tr> <tr> <td>99</td> <td>Others</td> </tr> </table>	17	US - Delaware	99	Others																																																																																																												
17	US - Delaware																																																																																																																			
99	Others																																																																																																																			
3.9	isin	String	12	The IPO's ISIN.																																																																																																																
3.10	nomValue	Decimal	15,12	The nominal or par value of the IPO company's securities.																																																																																																																
3.11	nomCur	Integer	2	<p>The currency denomination of the IPO company's nominal or par value, expressed as codes.</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>1</td><td>HKD</td></tr> <tr><td>2</td><td>CNY</td></tr> <tr><td>3</td><td>USD</td></tr> <tr><td>4</td><td>AED</td></tr> <tr><td>5</td><td>ATS</td></tr> <tr><td>6</td><td>AUD</td></tr> <tr><td>7</td><td>BDT</td></tr> <tr><td>8</td><td>BEC</td></tr> <tr><td>9</td><td>BEL</td></tr> <tr><td>10</td><td>BHD</td></tr> <tr><td>11</td><td>BND</td></tr> <tr><td>12</td><td>BRC</td></tr> <tr><td>13</td><td>BRL</td></tr> <tr><td>14</td><td>BUK</td></tr> <tr><td>15</td><td>CAD</td></tr> <tr><td>16</td><td>CHF</td></tr> <tr><td>17</td><td>CYP</td></tr> <tr><td>18</td><td>DEM</td></tr> <tr><td>19</td><td>DKK</td></tr> <tr><td>20</td><td>ECU</td></tr> <tr><td>21</td><td>ESP</td></tr> <tr><td>22</td><td>EUR</td></tr> <tr><td>23</td><td>FIM</td></tr> <tr><td>24</td><td>FJD</td></tr> <tr><td>25</td><td>FRF</td></tr> <tr><td>26</td><td>GBP</td></tr> <tr><td>27</td><td>GGP</td></tr> <tr><td>28</td><td>IDR</td></tr> <tr><td>29</td><td>IEP</td></tr> <tr><td>30</td><td>IMP</td></tr> <tr><td>31</td><td>INR</td></tr> <tr><td>32</td><td>ITL</td></tr> <tr><td>33</td><td>JPY</td></tr> <tr><td>34</td><td>KES</td></tr> <tr><td>35</td><td>KRW</td></tr> <tr><td>36</td><td>KWD</td></tr> <tr><td>37</td><td>LBP</td></tr> <tr><td>38</td><td>LKR</td></tr> <tr><td>39</td><td>MOP</td></tr> <tr><td>40</td><td>MUR</td></tr> <tr><td>41</td><td>MYR</td></tr> <tr><td>42</td><td>NGN</td></tr> <tr><td>43</td><td>NIS</td></tr> <tr><td>44</td><td>NLG</td></tr> <tr><td>45</td><td>NOK</td></tr> <tr><td>46</td><td>NZD</td></tr> <tr><td>47</td><td>OMR</td></tr> <tr><td>48</td><td>PHP</td></tr> <tr><td>49</td><td>PKR</td></tr> <tr><td>50</td><td>PTE</td></tr> <tr><td>51</td><td>QAR</td></tr> <tr><td>52</td><td>RUB</td></tr> <tr><td>53</td><td>SAR</td></tr> <tr><td>54</td><td>SCR</td></tr> <tr><td>99</td><td>Others</td></tr> </tbody> </table>	Code	Description	1	HKD	2	CNY	3	USD	4	AED	5	ATS	6	AUD	7	BDT	8	BEC	9	BEL	10	BHD	11	BND	12	BRC	13	BRL	14	BUK	15	CAD	16	CHF	17	CYP	18	DEM	19	DKK	20	ECU	21	ESP	22	EUR	23	FIM	24	FJD	25	FRF	26	GBP	27	GGP	28	IDR	29	IEP	30	IMP	31	INR	32	ITL	33	JPY	34	KES	35	KRW	36	KWD	37	LBP	38	LKR	39	MOP	40	MUR	41	MYR	42	NGN	43	NIS	44	NLG	45	NOK	46	NZD	47	OMR	48	PHP	49	PKR	50	PTE	51	QAR	52	RUB	53	SAR	54	SCR	99	Others
Code	Description																																																																																																																			
1	HKD																																																																																																																			
2	CNY																																																																																																																			
3	USD																																																																																																																			
4	AED																																																																																																																			
5	ATS																																																																																																																			
6	AUD																																																																																																																			
7	BDT																																																																																																																			
8	BEC																																																																																																																			
9	BEL																																																																																																																			
10	BHD																																																																																																																			
11	BND																																																																																																																			
12	BRC																																																																																																																			
13	BRL																																																																																																																			
14	BUK																																																																																																																			
15	CAD																																																																																																																			
16	CHF																																																																																																																			
17	CYP																																																																																																																			
18	DEM																																																																																																																			
19	DKK																																																																																																																			
20	ECU																																																																																																																			
21	ESP																																																																																																																			
22	EUR																																																																																																																			
23	FIM																																																																																																																			
24	FJD																																																																																																																			
25	FRF																																																																																																																			
26	GBP																																																																																																																			
27	GGP																																																																																																																			
28	IDR																																																																																																																			
29	IEP																																																																																																																			
30	IMP																																																																																																																			
31	INR																																																																																																																			
32	ITL																																																																																																																			
33	JPY																																																																																																																			
34	KES																																																																																																																			
35	KRW																																																																																																																			
36	KWD																																																																																																																			
37	LBP																																																																																																																			
38	LKR																																																																																																																			
39	MOP																																																																																																																			
40	MUR																																																																																																																			
41	MYR																																																																																																																			
42	NGN																																																																																																																			
43	NIS																																																																																																																			
44	NLG																																																																																																																			
45	NOK																																																																																																																			
46	NZD																																																																																																																			
47	OMR																																																																																																																			
48	PHP																																																																																																																			
49	PKR																																																																																																																			
50	PTE																																																																																																																			
51	QAR																																																																																																																			
52	RUB																																																																																																																			
53	SAR																																																																																																																			
54	SCR																																																																																																																			
99	Others																																																																																																																			
3.12	hkAddress	Array	4	<p>The IPO company's principal address in Hong Kong, expressed in a nested format, e.g.:</p> <pre>"hkAddress":[   {"id": "1", "line": "26/F Tower One, Times Square" },   {"id": "2", "line": "1 Matheson Street" },</pre>																																																																																																																

				{“id”:“3”,“line”:“Causeway Bay” }, {“id”:“4”,“line”:“Hong Kong” }																										
3.13	warrants	Array	10	The list series of warrants to be listed by the IPO company, expressed in a nested format.																										
3.13.1	warrantNameEngShort	String	15	The warrant’s full English name.																										
3.13.2	warrantNameEngFull	String	100	The warrant’s short English name.																										
3.13.3	warrantCode	String	10	The warrant’s security code.																										
3.13.4	isin	String	12	The warrant’s ISIN.																										
3.13.5	boardLot	Integer	6	The minimum trading unit of the warrant.																										
3.13.6	subscriptionPrice	Decimal	12,3	The subscription price of the warrant.																										
3.13.7	faceValue	Integer	2	To indicate the denomination method of the warrant’s face value, expressed in codes: <table border="1" data-bbox="735 622 1434 703"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Dollar Amount</td> </tr> <tr> <td>2</td> <td>Unit Number</td> </tr> </tbody> </table>	Code	Description	1	Dollar Amount	2	Unit Number																				
Code	Description																													
1	Dollar Amount																													
2	Unit Number																													
3.13.8	totalWarrants	Integer	20	The number of warrants to be issued.																										
3.14	offerType	Integer	2	The listing method of the IPO, expressed as codes: <table border="1" data-bbox="735 797 1434 956"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Global offer (placing and public offer)</td> </tr> <tr> <td>2</td> <td>By placing only</td> </tr> <tr> <td>3</td> <td>By public offer only</td> </tr> <tr> <td>4</td> <td>By introduction</td> </tr> <tr> <td>5</td> <td>Transfer from GEM</td> </tr> </tbody> </table>	Code	Description	1	Global offer (placing and public offer)	2	By placing only	3	By public offer only	4	By introduction	5	Transfer from GEM														
Code	Description																													
1	Global offer (placing and public offer)																													
2	By placing only																													
3	By public offer only																													
4	By introduction																													
5	Transfer from GEM																													
3.15	listSecurities	Integer	2	The security type of the IPO, expressed as codes: <table border="1" data-bbox="735 1061 1434 1321"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Ordinary shares</td> </tr> <tr> <td>2</td> <td>Ordinary shares (H shares)</td> </tr> <tr> <td>3</td> <td>Ordinary shares (conversion from B to H shares)</td> </tr> <tr> <td>4</td> <td>Preference shares</td> </tr> <tr> <td>5</td> <td>Real Estate Investment Trust</td> </tr> <tr> <td>6</td> <td>Exchange Traded Product</td> </tr> <tr> <td>7</td> <td>Depository Receipts</td> </tr> <tr> <td>8</td> <td>Share Stapled Units</td> </tr> <tr> <td>99</td> <td>Other</td> </tr> </tbody> </table>	Code	Description	1	Ordinary shares	2	Ordinary shares (H shares)	3	Ordinary shares (conversion from B to H shares)	4	Preference shares	5	Real Estate Investment Trust	6	Exchange Traded Product	7	Depository Receipts	8	Share Stapled Units	99	Other						
Code	Description																													
1	Ordinary shares																													
2	Ordinary shares (H shares)																													
3	Ordinary shares (conversion from B to H shares)																													
4	Preference shares																													
5	Real Estate Investment Trust																													
6	Exchange Traded Product																													
7	Depository Receipts																													
8	Share Stapled Units																													
99	Other																													
3.16	listPlatform	Integer	2	The listing board of the IPO, expressed as codes: <table border="1" data-bbox="735 1429 1434 1507"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Main board</td> </tr> <tr> <td>2</td> <td>GEM</td> </tr> </tbody> </table>	Code	Description	1	Main board	2	GEM																				
Code	Description																													
1	Main board																													
2	GEM																													
3.17	primaryExchange	Array of String	17*2	An array listing the primary exchange(s) of the IPO company, expressed as exchange codes: <table border="1" data-bbox="735 1637 1434 2022"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The Stock Exchange of Hong Kong (SEHK)</td> </tr> <tr> <td>1</td> <td>The Amsterdam Stock Exchange (NYSE Euronext - Amsterdam)</td> </tr> <tr> <td>2</td> <td>The Australian Securities Exchange (ASX)</td> </tr> <tr> <td>3</td> <td>The Brazilian Securities, Commodities and Futures Exchange (BM&amp;FBOVESPA)</td> </tr> <tr> <td>4</td> <td>The Frankfurt Stock Exchange (Deutsche Börse)</td> </tr> <tr> <td>5</td> <td>The Italian Stock Exchange (Borsa Italiana)</td> </tr> <tr> <td>6</td> <td>The London Stock Exchange (LSE)</td> </tr> <tr> <td>7</td> <td>The Madrid Stock Exchange (Bolsa de Madrid)</td> </tr> <tr> <td>8</td> <td>NASDAQ OMX (US)</td> </tr> <tr> <td>9</td> <td>The New York Stock Exchange (NYSE Euronext (US))</td> </tr> <tr> <td>10</td> <td>The Paris Stock Exchange (NYSE Euronext – Paris)</td> </tr> <tr> <td>11</td> <td>The Singapore Exchange (SGX)</td> </tr> </tbody> </table>	Code	Description	0	The Stock Exchange of Hong Kong (SEHK)	1	The Amsterdam Stock Exchange (NYSE Euronext - Amsterdam)	2	The Australian Securities Exchange (ASX)	3	The Brazilian Securities, Commodities and Futures Exchange (BM&FBOVESPA)	4	The Frankfurt Stock Exchange (Deutsche Börse)	5	The Italian Stock Exchange (Borsa Italiana)	6	The London Stock Exchange (LSE)	7	The Madrid Stock Exchange (Bolsa de Madrid)	8	NASDAQ OMX (US)	9	The New York Stock Exchange (NYSE Euronext (US))	10	The Paris Stock Exchange (NYSE Euronext – Paris)	11	The Singapore Exchange (SGX)
Code	Description																													
0	The Stock Exchange of Hong Kong (SEHK)																													
1	The Amsterdam Stock Exchange (NYSE Euronext - Amsterdam)																													
2	The Australian Securities Exchange (ASX)																													
3	The Brazilian Securities, Commodities and Futures Exchange (BM&FBOVESPA)																													
4	The Frankfurt Stock Exchange (Deutsche Börse)																													
5	The Italian Stock Exchange (Borsa Italiana)																													
6	The London Stock Exchange (LSE)																													
7	The Madrid Stock Exchange (Bolsa de Madrid)																													
8	NASDAQ OMX (US)																													
9	The New York Stock Exchange (NYSE Euronext (US))																													
10	The Paris Stock Exchange (NYSE Euronext – Paris)																													
11	The Singapore Exchange (SGX)																													

				<table border="1"> <tr> <td>12</td> <td>The Stockholm Stock Exchange (NASDAQ OMX – Stockholm)</td> </tr> <tr> <td>13</td> <td>The Swiss Exchange (SIX Swiss Exchange)</td> </tr> <tr> <td>14</td> <td>The Tokyo Stock Exchange (TSE)</td> </tr> <tr> <td>15</td> <td>The Toronto Stock Exchange (TMX)</td> </tr> <tr> <td>99</td> <td>Other</td> </tr> </table>	12	The Stockholm Stock Exchange (NASDAQ OMX – Stockholm)	13	The Swiss Exchange (SIX Swiss Exchange)	14	The Tokyo Stock Exchange (TSE)	15	The Toronto Stock Exchange (TMX)	99	Other
12	The Stockholm Stock Exchange (NASDAQ OMX – Stockholm)													
13	The Swiss Exchange (SIX Swiss Exchange)													
14	The Tokyo Stock Exchange (TSE)													
15	The Toronto Stock Exchange (TMX)													
99	Other													
3.18	dualPrimaryExchange	String	80	If the IPO company is operating a dual-primary listing, a list of the primary exchanges expressed as a string separated by commas.										
3.19	biotechIndicator	String	1	If the IPO company is listing as a biotech company, then "1". Else, the response will return "0".										
3.20	regsIndicator	String	1	If the IPO company is operating a "Reg-S listing", then "1". Else, the response will return "0".										
3.21	wvrRatio	String	5	If the IPO company has weighted voting rights securities, then the voting ratio expressed in "[n],[n]", where each [n] is an integer with up to 2 digits.  If the IPO company does not have any weighted voting rights securities, the response will return null.										
3.22	tradeCurrency	String	3	The IPO's trading currency, expressed as currency codes:  <table border="1"> <thead> <tr> <th>Currency</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>HKD</td> <td>Hong Kong Dollar</td> </tr> <tr> <td>CNY</td> <td>Chinese Yuan</td> </tr> <tr> <td>USD</td> <td>United States Dollar</td> </tr> </tbody> </table>	Currency	Description	HKD	Hong Kong Dollar	CNY	Chinese Yuan	USD	United States Dollar		
Currency	Description													
HKD	Hong Kong Dollar													
CNY	Chinese Yuan													
USD	United States Dollar													
3.23	boardLot	Integer	6	The minimum trading unit of the IPO company.										
3.24	downwardPriceFlex	Decimal	3,0	The percentage at which the IPO company may price its IPO below the minimum offer price. Example: "10" = 10%.										
3.25	upwardPriceFlex	Decimal	6,0	The percentage at which the IPO company may price its IPO above the maximum offer price. Example: "10" = 10%.										
3.26	priceMin	Decimal	12,3	The minimum offer price of the IPO.										
3.27	priceMax	Decimal	12,3	The maximum offer price of the IPO.										
3.28	priceFinal	Decimal	12,3	The final offer price of the IPO.										
3.29	clawback	Array	10	The thresholds for triggering a clawback and their corresponding retail allocations expressed in percentages. Here, ratio = each threshold and allocation = percentage allocation to the public offer (Example: "10" = 10%). Expressed in a nested format, e.g.:  <pre>"clawback":[   {"id":"1","ratio":"1","allocation":"10"},   {"id":"2","ratio":"15","allocation":"30"},   {"id":"3","ratio":"50","allocation":"40"},   {"id":"4","ratio":"100","allocation":"100"}]</pre>										
3.30	preIpoShares	String	20	The number of securities issued by the IPO company before the commencement of the IPO.										
3.31	ipoShares	String	20	The expected number of securities to be issued by the IPO company following the completion of the IPO.										
3.32	poSharesInitial	String	20	The number of securities initially allocated to the public offer.										
3.33	poApplicationQuantity	String	20	Number of securities validly subscribed by the public offer.										
3.34	poOversubscriptionRatio	Decimal	9,2	poApplicationQuantity divided by poSharesInitial.										
3.35	poSharesFinal	String	20	The final number of securities allocated to the public offer.										
3.36	ioSharesInitial	String	20	The number of securities initially allocated to the institutional offer.										
3.37	ioApplicationQuantity	String	20	Number of securities validly subscribed by the institutional offer.										
3.38	ioOversubscriptionRatio	Decimal	9,2	ioApplicationQuantity divided by ioSharesInitial.										
3.39	ioOfferSharesFinal	String	20	The final number of securities allocated to the institutional offer.										
3.40	poReallocationCap	Decimal	5,2	The percentage cap at which the IPO company may allocate its securities to the public offer at its own discretion.										
3.41	upsizedOption	Decimal	5,2	The IPO's offer size adjustment option, expressed in percentage terms (Example: "10" = 10%).										
3.42	upsizedPoShares	String	20	The additional number of securities issued to the public offer using the IPO's offer size adjustment option.										

3.43	upsizeloShares	String	20	The additional number of securities issued to the institutional offer using the IPO's offer size adjustment option.
3.44	overallotOption	Decimal	5,2	The IPO's over-allotment option, expressed in percentage terms (Example: "10" = 10%).
3.45	overallotPoShares	String	20	The additional number of securities issued to the public offer using the IPO's over-allotment option.
3.46	overallotIoShares	String	20	The additional number of securities issued to the institutional offer using the IPO's over-allotment option.
3.47	overallPoShares	String	20	The final size of the public offer, calculated as poSharesFinal + upsizeloShares + overallotPoShares.
3.48	overallIoShares	String	20	The final size of the institutional offer, calculated as ioSharesFinal + upsizeloShares + overallotIoShares.
3.49	overallIpoShares	String	20	The final size of the IPO, calculated as overallPoShares + overallIoShares.
3.50	totalIssuedCapitalListing	String	20	The IPO company's total issued number of securities upon listing.
3.51	totalIssuedHsharesListing	String	20	The IPO company's total issued number of H-shares upon listing.
3.52	totalIssuedNonwvrsharesListing	String	20	The IPO company's total issued number of non-weighted voting rights securities upon listing.
3.53	denomTable	Array	200	<p>An array of denominations at which a public offer subscriber may subscribe for the IPO. Here, shares = number of securities for subscription and value = the maximum value payable upon application.</p> <p>Expressed in a nested format, e.g.:</p> <pre>"denomTable":[   {"id":"1","shares":"100","value":"101.01"},   {"id":"2","shares":"200","value":"202.02"},   {"id":"3","shares":"300","value":"303.03"},   {"id":"4","shares":"400","value":"404.03"},   {"id":"5","shares":"500","value":"505.04"},   {"id":"6","shares":"600","value":"606.05"},   {"id":"7","shares":"700","value":"707.06"},   {"id":"8","shares":"800","value":"808.06"},   {"id":"9","shares":"900","value":"909.07"},   {"id":"10","shares":"1000","value":"1010.08"},   {"id":"11","shares":"2000","value":"2020.15"}]</pre>
3.54	designatedSponsor	String	80	The designated sponsor of the IPO.
3.55	sponsors	Array	100	<p>The other joint sponsors of the IPO. Here, member = the company name of a joint sponsor.</p> <p>Presented in a nested JSON format, e.g.</p> <pre>"sponsors":[   {"id":"1","member":"Goldman Sachs (Asia)"},   {"id":"2","member":"Morgan Stanley (Asia)"},   {"id":"3","member":"JP Morgan (Asia)"},   {"id":"4","member":"BOCI Securities"}]</pre>
3.56	legalSponsor	Array	100	<p>The list of legal counsels retained by the sponsors of the IPO. Here, member = the firm name of a sponsor counsel.</p> <p>Presented in a nested JSON format, e.g.</p> <pre>"legalSponsor":[   {"id":"1","member":"Freshfields Bruckhaus Deringer"},   {"id":"2","member":"Clifford Chance"},   {"id":"3","member":"Deacons"}]</pre>
3.57	legalIssuer	String	80	The issuer's legal counsel.
3.58	underwriters	Array	100	<p>The list of underwriters within the IPO. Here, member = the company name of an underwriter.</p> <p>Presented in a nested JSON format, e.g.</p> <pre>"underwriters":[   {"id":"1","member":"Goldman Sachs (Asia)"},   {"id":"2","member":"Morgan Stanley (Asia)"},   {"id":"3","member":"JP Morgan (Asia)"},   {"id":"4","member":"BOCI Securities"}]</pre>
3.59	advisers	Array	100	<p>The list of advisers within the IPO. Here, member = the company name of an adviser.</p> <p>Presented in a nested JSON format, e.g.</p>

				<pre>"advisers":[   {"id":"1","member":"Goldman Sachs (Asia)"},   {"id":"2","member":"Morgan Stanley (Asia)"},   {"id":"3","member":"JP Morgan (Asia)"},   {"id":"4","member":"BOCI Securities"}]</pre>
3.60	overallCoordinators	Array	100	<p>The list of Overall Coordinators within the IPO. Here, the company of an overall coordinator.</p> <p>Presented in a nested JSON format, e.g.</p> <pre>"overallCoordinators":[   {"id":"1","member":"Goldman Sachs (Asia)"},   {"id":"2","member":"Morgan Stanley (Asia)"},   {"id":"3","member":"JP Morgan (Asia)"},   {"id":"4","member":"BOCI Securities"}]</pre>
3.61	distributors	Array	100	<p>The list of distributors within the IPO. Here, member = the company name of a distributor.</p> <p>Presented in a nested JSON format, e.g.</p> <pre>"distributors":[   {"id":"1","member":"Goldman Sachs (Asia)"},   {"id":"2","member":"Morgan Stanley (Asia)"},   {"id":"3","member":"JP Morgan (Asia)"},   {"id":"4","member":"BOCI Securities"}]</pre>
3.62	hkSharereg	String	80	The HK share registrar of the IPO.
3.63	bookOpenDate	String	19	The time and date for opening the IPO's public offer for subscriptions, in YYYY-MM-DD HH:MM:SS format.
3.64	bookCloseDate	String	19	The time and date for closing the IPO's public offer from subscriptions, in YYYY-MM-DD HH:MM:SS format.
3.65	pricingDate	String	19	The latest time and date for determining the final price of the IPO, in YYYY-MM-DD HH:MM:SS format.
3.66	allotmentDate	String	10	The expected date for broadcasting the public offer allotment results of the IPO, in YYYY-MM-DD format.
3.67	listingDate	String	19	The expected time and date at which the IPO commences trading, in YYYY-MM-DD HH:MM:SS format.
3.68	silInputDate	String	10	The expected date for HKSCC to permit the inputting of settlement instructions into CCASS in relation to the IPO, in YYYY-MM-DD format.
3.69	placingSharesDeliveryDate	String	19	The latest time and date for delivering the institutional offer shares to CCASS.
3.70	prefOfferIndicator	String	1	If the IPO company has preferential offers, then "1". Else, the response will return "0".
3.71	brokerage	Decimal	8,5	The percentage of the allotment value payable to the allottee's broker, example: "10" = 10%.
3.72	sfcLevy	Decimal	8,5	The percentage of the allotment value payable to the SFC, example: "10" = 10%.
3.73	sehkTradingFee	Decimal	8,5	The percentage of the allotment value payable to SEHK, example: "10" = 10%.
3.74	frcoLevy	Decimal	8,5	The percentage of the allotment value payable to Financial Reporting Council, example: "10" = 10%.
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	exception	Array		<p>To indicate whether the entire request failed any validation checks:</p> <ul style="list-style-type: none"> <li>▪ Empty array = no error(s) were identified across the entire request</li> <li>▪ Non-empty array = the entire request was rejected due to a single or multiple error(s), with each error expressed as an individual object</li> </ul>
6.1	recordErrorCode	String	6	
6.2	recordErrorMsg	String	100	



```

{
  "code": "0",
  "message": "",
  "data": {
    "stkCode": "9988",
    "status": "40",
    "companyEngFull": "Alibaba Group Holding Limited",
    "companyEngShort": "BABA",
    "companyChiFull": "阿里巴巴集團控股有限公司",
    "companyChiShort": "阿里巴巴",
    "placeOfCorp": "1",
    "isin": "KYG017191142",
    "nomValue": "0.000000000025",
    "nomCur": "2",
    "hkAddress": [
      {
        "id": "1",
        "line": "26/F Tower One, Times Square"
      },
      {
        "id": "2",
        "line": "1 Matheson Street"
      },
      {
        "id": "3",
        "line": "Causeway Bay"
      },
      {
        "id": "4",
        "line": "Hong Kong"
      }
    ],
    "warrants": [
      {
        "warrantNameEngShort": "BABA-WRT 1",
        "warrantNameEngFull": "Alibaba Warrant 1",
        "warrantCode": "4988",
        "isin": "",
        "boardLot": 100000,
        "subscriptionPrice": 2.000,
        "faceValue": "Dollar Amount",
        "totalWarrants": 10000000
      },
      {
        "warrantNameEngShort": "BABA-WRT 2",
        "warrantNameEngFull": "Alibaba Warrant 2",
        "warrantCode": "4999",
        "isin": "",
        "boardLot": 100000,
        "subscriptionPrice": 4.000,
        "faceValue": "Dollar Amount",
        "totalWarrants": 40000000
      }
    ],
    "offerType": 1,
    "listSecurities": 1,
    "listPlatform": 1,
    "primaryExchange": ["10"],
    "dualPrimaryExchange": null,
    "biotechIndicator": "0",
    "regsIndicator": "0",
    "wvrRatio": "1,10",
    "tradeCurrency": "HKD",
    "boardLot": 100,
  }
}

```

```

"downwardPriceFlex": 10,
"upwardPriceFlex": 0,
"priceMin": 0.000,
"priceMax": 188.000,
"priceFinal": null,
"clawback": [{
  "id": "1",
  "threshold": 1,
  "allocation": 2.5
},
{
  "id": "2",
  "threshold": 15,
  "allocation": 5
},
{
  "id": "3",
  "threshold": 50,
  "allocation": 7.5
},
{
  "id": "4",
  "threshold": 100,
  "allocation": 10
}
],
"preIpoShares": "80000000",
"ipoShares": "500000000",
"poSharesInitial": "12500000",
"poApplicationQuantity": "530465900",
"poOversubscriptionRatio": 42.44,
"poSharesFinal": "50000000",
"ioSharesInitial": "487500000",
"ioApplicationQuantity": "487500000",
"ioOversubscriptionRatio": 1.00,
"ioOfferSharesFinal": "450000000",
"poReallocationCap": 20,
"upsizedOption": 20,
"upsizedPoShares": null,
"upsizedIoShares": null,
"overallotOption": 15,
"overallotPoShares": null,
"overallotIoShares": null,
"overallPoShares": null,
"overallIoShares": null,
"overallIpoShares": null,
"totalIssuedCapitalListing": null,
"totalIssuedHsharesListing": null,
"totalIssuedNonwvrsharesListing": null,
"denomTable": [{
  "id": "1",
  "shares": 100,
  "value": 188997.91
},
{
  "id": "2",
  "shares": 200,
  "value": 37995.82
},
{
  "id": "3",
  "shares": 300,
  "value": 56993.72
}
}

```

```
},
{
  "id": "4",
  "shares": 400,
  "value": 75991.63
},
{
  "id": "5",
  "shares": 500,
  "value": 94989.54
},
{
  "id": "6",
  "shares": 600,
  "value": 113987.45
},
{
  "id": "7",
  "shares": 700,
  "value": 132985.35
},
{
  "id": "8",
  "shares": 800,
  "value": 151983.26
},
{
  "id": "9",
  "shares": 900,
  "value": 170981.17
},
{
  "id": "10",
  "shares": 1000,
  "value": 189979.08
},
{
  "id": "11",
  "shares": 2000,
  "value": 379958.15
},
{
  "id": "12",
  "shares": 3000,
  "value": 569937.23
},
{
  "id": "13",
  "shares": 4000,
  "value": 759937.30
},
{
  "id": "14",
  "shares": 5000,
  "value": 949895.38
},
{
  "id": "15",
  "shares": 6000,
  "value": 1139874.46
},
{
  "id": "16",
```

```

    "shares": 7000,
    "value": 1329853.53
  },
  {
    "id": "17",
    "shares": 8000,
    "value": 1519832.61
  },
  {
    "id": "18",
    "shares": 9000,
    "value": 1709811.68
  },
  {
    "id": "19",
    "shares": 10000,
    "value": 1899790.76
  }
],
"designatedSponsor": "Credit Suisse (Hong Kong) Limited",
"sponsors": [{
  "id": "1",
  "member": "China International Capital Corporation"
}],
"legalSponsor": [{
  "id": "1",
  "member": "Clifford Chance"
},
{
  "id": "2",
  "member": "Deacons"
}
],
"legalIssuer": "Freshfields Bruckhaus Deringer",
"underwriters": [],
"advisers": [],
"overallCoordinators": [{
  "id": "1",
  "member": "Credit Suisse (Hong Kong) Limited"
},
{
  "id": "2",
  "member": "China International Capital Corporation"
}
],
"distributors": [{
  "id": "1",
  "member": "Citigroup Global Markets Asia"
},
{
  "id": "2",
  "member": "JP Morgan"
},
{
  "id": "3",
  "member": "The Hongkong and Shanghai Banking"
}
],
"hkSharereg": "Computershare Investor Services HK",
"bookOpenDate": "2021-04-26 09:00:00",
"bookCloseDate": "2021-04-29 12:00:00",
"pricingDate": "2021-04-30",
"allotmentDate": "2021-04-30",

```

```
"listingDate": "2021-05-04 09:00:00",
"silInputDate": "2021-05-03",
"placingSharesDeliveryDate": "2021-05-04 09:00:00",
"prefOfferIndicator": "0",
"brokerage": 1.00000,
"sfcLevy": 0.00270,
"sehkTradingFee": 0.00500,
"frcoLevy": 0.00015
}],
"totalSize": 1,
"timestamp": "2021-04-29 15:00:00",
"exception":[]
```

```
}
```

## 7 EIPO Subscription

All EIPO Subscription-related requests and responses must be signed, with PII values encrypted / decrypted based on the procedures set out in 3 End-to-End Encryption. All data field descriptions below are based upon the decrypted values to illustrate the business-level validations required.

### 7.1 Add EIPO Subscription Entries

#### 7.1.1 Request

**POST** /api/eipo/subscriptions/add/v1

#	Field	Type	Length	Required	Description																		
1	data	Array		Yes	Min 1 object, max 1,000 objects. Each object should contain 1 subscriptions (i.e. each request may process up to 1,000 subscriptions).																		
1.1	requestID	Integer	7	Yes	A unique reference within the bulk request for pairing with a response message. Must contain numeric characters only.																		
1.2	ipoid	String	20	Yes	Must be a valid ipoid from the Enquire IPO List API endpoint.																		
1.3	idList	Array		Yes	Min 1 object, max 4 objects. Each object contains the information of 1 applicant, e.g. 2 joint account holders should include 2 objects.																		
1.3.1	idType	String	2	Yes	<p>The ID Type of the applicant, expressed in ID Codes:</p> <table border="1"> <thead> <tr> <th>ID Type</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>HKID</td> </tr> <tr> <td>2</td> <td>National identification document</td> </tr> <tr> <td>3</td> <td>Passport</td> </tr> <tr> <td>4</td> <td>LEI registration document</td> </tr> <tr> <td>5</td> <td>Certificate of incorporation</td> </tr> <tr> <td>6</td> <td>Business registration certificate</td> </tr> <tr> <td>7</td> <td>Other official incorporation document</td> </tr> <tr> <td>8</td> <td>Broker-to-Client Assigned Number</td> </tr> </tbody> </table> <p>If idList [Field 1.5] contains &gt; 1 object, then must be 1, 2 or 3.</p>	ID Type	Description	1	HKID	2	National identification document	3	Passport	4	LEI registration document	5	Certificate of incorporation	6	Business registration certificate	7	Other official incorporation document	8	Broker-to-Client Assigned Number
ID Type	Description																						
1	HKID																						
2	National identification document																						
3	Passport																						
4	LEI registration document																						
5	Certificate of incorporation																						
6	Business registration certificate																						
7	Other official incorporation document																						
8	Broker-to-Client Assigned Number																						
1.3.2	idCountryJurisdiction	String	3	Yes	<p>The issuing authority of the applicant's identification document. Based on ISO-3166 Alpha-3 codes, or 'OTH' to represent "Other".</p> <p>Restrictions:            If idType [Field #1.3.1] = 1, must be "HKG".            If idType [Field #1.3.1] = 8, must be "OTH".</p>																		
1.3.3	idNum	String	40	Yes	<p>The ID number of the applicant's identification document.</p> <p>Restrictions:            If idType [Field #1.3.1] = 1, then must be a concatenation (no spaces) of:            (i) <b>Prefix:</b> 1-2 upper case alphabetical characters            (ii) <b>ID number:</b> 6 integers            (iii) <b>Check digit:</b> 0 to 9, or "A", enclosed by parentheses</p> <table border="1"> <thead> <tr> <th>Successful Examples</th> <th>Unsuccessful Examples</th> </tr> </thead> <tbody> <tr> <td>Y123456(7), YZ123456(7), Y123456(A)</td> <td>Y123456, Y123456?</td> </tr> </tbody> </table> <p>If idType [Field #1.3.1] = 4, then must be <u>exactly</u> 20 uppercase alphanumeric characters.</p> <p>If idType [Field #1.3.1] = 8, must be in "xxxxxx.#####" format, where:</p> <ul style="list-style-type: none"> <li>"x" = a text string of exactly 6 uppercase alphanumeric characters</li> <li> "." = a delimiter to separate "x" and "#"</li> <li> "#" = a positive integer up to 10 characters</li> </ul>	Successful Examples	Unsuccessful Examples	Y123456(7), YZ123456(7), Y123456(A)	Y123456, Y123456?														
Successful Examples	Unsuccessful Examples																						
Y123456(7), YZ123456(7), Y123456(A)	Y123456, Y123456?																						

					<table border="1"> <thead> <tr> <th>Successful Examples</th> <th>Unsuccessful Examples</th> </tr> </thead> <tbody> <tr> <td>"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"</td> <td>"ABC123.0000000001", "ABC123.0000000000",</td> </tr> </tbody> </table>	Successful Examples	Unsuccessful Examples	"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"	"ABC123.0000000001", "ABC123.0000000000",
Successful Examples	Unsuccessful Examples								
"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"	"ABC123.0000000001", "ABC123.0000000000",								
					If idType [Field #1.3.1] = <b>2, 3, 5, 6</b> or <b>7</b> , any text input is permitted.				
1.3.4	fullNameEng	String	150	No	The full English name of the applicant.  Only English alphabetical characters and spaces are permitted. Mandatory if fullNameChi [Field #1.5.5] = null or blank.				
1.3.5	fullNameChi	String	150	No	The full Chinese or non-English name of the applicant.  Fully UTF-8 encoded. Mandatory if fullNameEng [Field #1.5.4] = null or blank.				
1.4	appQuantity	String	20	Yes	The number of securities being subscribed by the applicant.  Must be a 'shares' parameter from denomTable in the Enquire IPO Reference Data API.				
1.5	firmID	String	5	Yes	The SEHK Participant ID for identifying the recipient of any brokerage fees.  Must be a valid SEHK Participant ID (with no leading zeroes), or '00000' for HKSCC.				
1.6	ownRef	String	40	No	Free text field for own reference.				

```

{
  "data": [
    {
      "requestID": 1,
      "ipoID": "1234",
      "idList": [
        {
          "idType": "1",
          "idCountryJurisdiction": "HKG",
          "idNum": "A123456(9)",
          "fullNameEng": "Chan Tai Man",
          "fullNameChi": "陳大文"
        },
        {
          "idType": "1",
          "idCountryJurisdiction": "HKG",
          "idNum": "B234567(1)",
          "fullNameEng": "Chan Siu Man",
          "fullNameChi": "陳小文"
        }
      ],
      "appQuantity": "1000",
      "firmID": "00000",
      "ownRef": null
    },
    {
      "requestID": 2,
      "ipoID": "1234",
      "idList": [
        {
          "idType": "4",
          "idCountryJurisdiction": "OTH",
          "idNum": "A1B200D4E5F6G7H8I9J0",
          "fullNameEng": "Alpha Company Ltd",
        }
      ]
    }
  ]
}

```

```

        "fullNameChi": "甲有限公司"
    },
    "appQuantity": "5000",
    "firmID": "00000"
},
{
    "requestID": 3,
    "ipoID": "1234",
    "idList": [{
        "idType": "1",
        "idCountryJurisdiction": "HKG",
        "idNum": "C345678(A)",
        "fullNameEng": "",
        "fullNameChi": "Rémy Victor"
    }],
    "appQuantity": "500000",
    "firmID": "00000",
    "ownRef": "Favourite client"
}
]
}

```

## 7.1.2 Response

#	Field	Type	Length	Description
1	code	String	6	0 to indicate 'successful response'.
2	message	String	100	Empty string, i.e. "" to indicate successful response.
3	data	Array		
3.1	requestID	Integer	7	The requestID from the original API request.
3.2	recordID	String	17	A Record ID generated for each subscription that has passed all validation checks. It contains: (i) a sequentially-generated 16-digit integer; and (ii) a suffix indicating the method through which the subscription was created (" <b>O</b> " = Online input, " <b>B</b> " = Bulk upload, and " <b>A</b> " = API.).  A response without a recordID indicates that the subscription failed ≥1 validation check(s).
3.3	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"> <li>Empty array = the individual request has passed all validation checks</li> <li>Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li> </ul>
3.3.1	recordErrorCode	String	6	
3.3.2	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"> <li>Empty array = no structural or permission-related error(s) were identified across the entire request</li> <li>Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li> </ul>
6.1	recordErrorCode	String	6	
6.2	recordErrorMsg	String	100	



```
{
  "code": "0",
  "message": "",
  "data": [
    {
      "requestID": 1,
      "recordID": "1234567890123456A",
      "exception": []
    },
    {
      "requestID": 2,
      "recordID": "1234567890123457A",
      "exception": []
    },
    {
      "requestID": 3,
      "recordID": "123456789018858A",
      "exception": []
    }
  ],
  "totalSize": 3,
  "timestamp": "2021-08-26 09:13:22",
  "exception": []
}
```

## 7.2 Change EIPO Subscription Entries

### 7.2.1 Request

POST /api/eipo/subscriptions/change/v1

#	Field	Type	Length	Required	Description																		
1	data	Array		Yes	Min 1 object, max 1,000 objects. Each object should contain 1 subscriptions (i.e. each request may process up to 1,000 subscriptions).																		
1.1	recordID	String	17	Yes	To indicate the subscription that is being amended. Must be a valid Record ID within own subscription list, under "Authorised" sub-flow status.																		
1.2	idList	Array		Yes	Min 1 object, max 4 objects. Each object should contain the subscription information of 1 applicant, e.g. a joint account subscription with 2 applicants should include 2 objects.																		
1.2.1	idType	String	2	Yes	<p>The ID Type of the applicant, expressed in ID Codes:</p> <table border="1"> <thead> <tr> <th>ID Type</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>HKID</td> </tr> <tr> <td>2</td> <td>National identification document</td> </tr> <tr> <td>3</td> <td>Passport</td> </tr> <tr> <td>4</td> <td>LEI registration document</td> </tr> <tr> <td>5</td> <td>Certificate of incorporation</td> </tr> <tr> <td>6</td> <td>Business registration certificate</td> </tr> <tr> <td>7</td> <td>Other official incorporation document</td> </tr> <tr> <td>8</td> <td>Broker-to-Client Assigned Number</td> </tr> </tbody> </table> <p>If idList [Field 1.2] contains &gt; 1 object, then must be 1, 2 or 3.</p>	ID Type	Description	1	HKID	2	National identification document	3	Passport	4	LEI registration document	5	Certificate of incorporation	6	Business registration certificate	7	Other official incorporation document	8	Broker-to-Client Assigned Number
ID Type	Description																						
1	HKID																						
2	National identification document																						
3	Passport																						
4	LEI registration document																						
5	Certificate of incorporation																						
6	Business registration certificate																						
7	Other official incorporation document																						
8	Broker-to-Client Assigned Number																						
1.2.2	idCountryJurisdiction	String	3	Yes	<p>The issuing authority of the applicant's identification document. Based on ISO-3166 Alpha-3 codes, or 'OTH' to represent "Other".</p> <p>Restrictions:            If idType [Field #1.2.1] = 1, must be "HKG".            If idType [Field #1.2.1] = 8, must be "OTH".</p>																		
1.2.3	idNum	String	40	Yes	<p>The ID number of the applicant's identification document.</p> <p>Restrictions:            If idType [Field #1.2.1] = 1, then must be a concatenation (no spaces) of:            (iv) <b>Prefix:</b> 1-2 upper case alphabetical characters            (v) <b>ID number:</b> 6 integers            (vi) <b>Check digit:</b> 0 to 9, or "A", enclosed by parentheses</p> <table border="1"> <thead> <tr> <th>Successful Examples</th> <th>Unsuccessful Examples</th> </tr> </thead> <tbody> <tr> <td>Y123456(7), YZ123456(7), Y123456(A)</td> <td>Y123456, Y123456?</td> </tr> </tbody> </table> <p>If idType [Field #1.2.1] = 4, then must be <u>exactly</u> 20 uppercase alphanumeric characters.</p> <p>If idType [Field #1.2.1] = 8, must be in "xxxxxx.#####" format, where:</p> <ul style="list-style-type: none"> <li>"x" = a text string of exactly 6 uppercase alphanumeric characters</li> <li> "." = a delimiter to separate "x" and "#"</li> <li> "#" = a positive integer up to 10 characters</li> </ul> <table border="1"> <thead> <tr> <th>Successful Examples</th> <th>Unsuccessful Examples</th> </tr> </thead> <tbody> <tr> <td>"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"</td> <td>"ABC123.0000000001", "ABC123.0000000000",</td> </tr> </tbody> </table> <p>If idType [Field #1.2.1] = 2, 3, 5, 6 or 7, any text input is permitted.</p>	Successful Examples	Unsuccessful Examples	Y123456(7), YZ123456(7), Y123456(A)	Y123456, Y123456?	Successful Examples	Unsuccessful Examples	"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"	"ABC123.0000000001", "ABC123.0000000000",										
Successful Examples	Unsuccessful Examples																						
Y123456(7), YZ123456(7), Y123456(A)	Y123456, Y123456?																						
Successful Examples	Unsuccessful Examples																						
"ABC123.1123456789", "ABC123.112345678", "ABC123.112345"	"ABC123.0000000001", "ABC123.0000000000",																						

1.2.4	fullNameEng	String	150	No	The full English name of the applicant.  Only English alphabetical characters and spaces are permitted. Mandatory if fullNameChi [Field #1.2.5] = null or blank.
1.2.5	fullNameChi	String	150	No	The full Chinese or non-English name of the applicant.  Fully UTF-8 encoded. Mandatory if fullNameEng [Field #1.2.4] = null or blank.
1.3	appQuantity	String	20	Yes	The number of securities being subscribed by the applicant.  Must be a 'shares' parameter from denomTable in the Enquire IPO Reference Data API.
1.4	firmID	String	5	Yes	The SEHK Participant ID for identifying the recipient of any brokerage fees.  Must be a valid SEHK Participant ID (with no leading zeroes), or '00000' for HKSCC.
1.5	ownRef	String	40	No	Free text field for own reference.

```
{
  "data": {
    "recordID": "1234567890123456A",
    "idList": [
      {
        "idType": "1",
        "idCountryJurisdiction": "HKG",
        "idNum": "A123456(9)",
        "fullNameEng": "Chan Tai Man",
        "fullNameChi": "陳大文"
      },
      {
        "idType": "1",
        "idCountryJurisdiction": "HKG",
        "idNum": "B234567(1)",
        "fullNameEng": "Chan Siu Man",
        "fullNameChi": "陳小文"
      },
      {
        "idType": "1",
        "idCountryJurisdiction": "HKG",
        "idNum": "B234567(1)",
        "fullNameEng": "Mary Lee Sum See",
        "fullNameChi": "李心思"
      }
    ],
    "appQuantity": "1000",
    "firmID": "00000",
    "ownRef": null
  }
}
```

## 7.2.2 Response

#	Field	Type	Length	Description
1	code	String	6	0 to indicate 'successful response'.
2	message	String	100	Empty string, i.e. "" to indicate successful response.
3	data	Array		
3.1	recordID	String	17	The recordID from the original API request.
3.2	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = the individual request has passed all validation checks</li> <li>▪ Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li> </ul>
3.2.1	recordErrorCode	String	6	
3.2.2	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = no structural or permission-related error(s) were identified across the entire request</li> <li>▪ Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li> </ul>
6.1	recordErrorCode	String	6	
6.2	recordErrorMsg	String	100	

```
{
    "code": "0",
    "message": "",
    "data": [
        {
            "recordID": "1234567890123456A",
            "exception": []
        }
    ],
    "totalSize": 3,
    "timestamp": "2021-08-26 10:15:39",
    "exception": []
}
```

## 7.3 Invalidate EIPO Subscription Entries

### 7.3.1 Request

POST /api/eipo/subscriptions/invalidate/v1

#	Field	Type	Length	Required	Description
1	data	Array		Yes	Min 1 object, max 1,000 objects. Each object should contain 1 subscriptions (i.e. each request may process up to 1,000 subscriptions).
1.1	recordID	String	17	Yes	To indicate the subscription that is being amended. Must be a valid Record ID within own subscription list, under "Authorised" sub-flow status.

```
{
  "data": [
    {
      "recordID": "1234567890123456A"
    }
  ]
}
```

### 7.3.2 Response

#	Field	Type	Length	Description
1	code	String	6	0 to indicate 'successful response'.
2	message	String	100	Empty string, i.e. "" to indicate successful response.
3	data	Array		
3.1	recordID	String	17	The recordID from the original API request.
3.2	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"><li>▪ Empty array = the individual request has passed all validation checks</li><li>▪ Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li></ul>
3.2.1	recordErrorCode	String	6	
3.2.2	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"><li>▪ Empty array = no structural or permission-related error(s) were identified across the entire request</li><li>▪ Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li></ul>
6.1	recordErrorCode	String	6	
6.2	recordErrorMsg	String	100	

```
{
  "code": "0",
  "message": "",
  "data": [
    {
      "recordID": "1234567890123456A",
      "exception": []
    }
  ],
  "totalSize": 1,
}
```

```

    "timestamp": "2021-08-26 11:28:09"
    "exception": []
}

```

## 7.4 Enquire EIPO Subscription Entries

### 7.4.1 Request

**POST** /api/eipo/subscriptions/query/v1

#	Field	Type	Length	Required	Description
1	data	Object		Yes	
1.1	ipolD	String	20	No	Must be a valid ipolD from the Enquire IPO List API endpoint. Mandatory if recordID [Field #1.2] = null or blank.
1.2	recordID	Array of String	1000*17	No	Must be a valid Record ID within own subscription list, under "Authorised" sub-flow status. Mandatory if ipolD [Field #1.1] = null or blank.
1.3	subFlowStatus	String	2	No	To filter response by a subscription's status, either by "Authorised" (active subscriptions) or "Invalidated" (previously active subscriptions, now removed from subscription list).
2	size	Integer	18	No	Expected page size of the API response. Must be between 1 and 1,000. If null or blank, default as 100.
3	nextCursor	String	20	Yes	Key reference (recordID) from which the response message should start. "0" should be used to start from the first index.

```

{
  "data": {
    "ipolD": "1234",
    "recordID": null,
    "subFlowStatus": null
  },
  "size": 100,
  "nextCursor": "0"
}

```

```

{
  "data": {
    "ipolD": "1234",
    "recordID": ["2462303930948573A", "4317515259216099A", "5365467074774676A"],
    "subFlowStatus": null
  },
  "size": 100,
  "nextCursor": "6962170439634540A"
}

```

```

{
  "data": {
    "ipolD": "1234",
    "recordID": ["2462303930948573A", "4317515259216099A", "5365467074774676A"],
    "subFlowStatus": "3"
  },
}

```

```
"size": 100,
```

```
"nextCursor": "6962170439634540A"
```

```
}
```

## 7.4.2 Response

#	Field	Type	Length	Description																								
1	code	String	6	0 to indicate 'successful response'.																								
2	message	String	100	Empty string, i.e. "" to indicate successful response.																								
3	data	Array																										
3.1	stkCode	String	10	The IPO's stock code.																								
3.2	isin	String	12	The IPO's ISIN.																								
3.3	status	String	2	The status of the IPO, expressed in status codes: <table border="1" data-bbox="735 544 1436 857"> <thead> <tr> <th>Status</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>25</td><td>Deal Initiated</td></tr> <tr><td>30</td><td>Public Offer Closed</td></tr> <tr><td>35</td><td>Application Validated</td></tr> <tr><td>45</td><td>Allotment Confirmed</td></tr> <tr><td>50</td><td>Money Settlement</td></tr> <tr><td>55</td><td>Allocation Confirmed</td></tr> <tr><td>60</td><td>Placing Approved</td></tr> <tr><td>65</td><td>Allotment Results Approved</td></tr> <tr><td>70</td><td>Trading Started</td></tr> <tr><td>80</td><td>Suspended</td></tr> <tr><td>90</td><td>Cancelled</td></tr> </tbody> </table>	Status	Description	25	Deal Initiated	30	Public Offer Closed	35	Application Validated	45	Allotment Confirmed	50	Money Settlement	55	Allocation Confirmed	60	Placing Approved	65	Allotment Results Approved	70	Trading Started	80	Suspended	90	Cancelled
Status	Description																											
25	Deal Initiated																											
30	Public Offer Closed																											
35	Application Validated																											
45	Allotment Confirmed																											
50	Money Settlement																											
55	Allocation Confirmed																											
60	Placing Approved																											
65	Allotment Results Approved																											
70	Trading Started																											
80	Suspended																											
90	Cancelled																											
3.4	subFlowStatus	String	2	The subscription's sub-flow status, either as "Authorised" (active) or "Invalidated" (previously active, now removed from subscription list).																								
3.5	recordID	String	17	The subscription's Record ID.																								
3.6	idList	Array		Min 1 object, max 4 objects. Each object contains the information of 1 applicant, e.g. 2 joint account holders should include 2 objects.																								
3.6.1	idType	String	2	The ID Type of the applicant, expressed in ID Codes: <table border="1" data-bbox="735 1099 1436 1335"> <thead> <tr> <th>ID Type</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>1</td><td>HKID</td></tr> <tr><td>2</td><td>National identification document</td></tr> <tr><td>3</td><td>Passport</td></tr> <tr><td>4</td><td>LEI registration document</td></tr> <tr><td>5</td><td>Certificate of incorporation</td></tr> <tr><td>6</td><td>Business registration certificate</td></tr> <tr><td>7</td><td>Other official incorporation document</td></tr> <tr><td>8</td><td>Broker-to-Client Assigned Number</td></tr> </tbody> </table>	ID Type	Description	1	HKID	2	National identification document	3	Passport	4	LEI registration document	5	Certificate of incorporation	6	Business registration certificate	7	Other official incorporation document	8	Broker-to-Client Assigned Number						
ID Type	Description																											
1	HKID																											
2	National identification document																											
3	Passport																											
4	LEI registration document																											
5	Certificate of incorporation																											
6	Business registration certificate																											
7	Other official incorporation document																											
8	Broker-to-Client Assigned Number																											
3.6.2	idCountryJurisdiction	String	3	The issuing authority of the applicant's identification document. Based on ISO-3166 Alpha-3 codes, or 'OTH' to represent "Other".																								
3.6.3	idNum	String	40	The ID number of the applicant's identification document.																								
3.6.4	fullNameEng	String	150	The full English name of the applicant.																								
3.6.5	fullNameChi	String	150	The full Chinese or non-English name of the applicant.																								
3.7	appQuantity	String	20	The number of securities being subscribed by the applicant																								
3.8	allotQuantity	String	20	The number of securities allotted to the applicant.																								
3.9	firmID	String	5	The SEHK Participant ID for identifying the recipient of any brokerage fees.																								
3.10	ownRef	String	40	Free text field for own reference.																								
3.11	unsuccessfulReason	String	2	To indicate the applicable reason for which the subscription was unsuccessful, expressed in reason codes: <table border="1" data-bbox="735 1783 1436 2011"> <thead> <tr> <th>ID Type</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>0</td><td>Allotted</td></tr> <tr><td>1</td><td>Not allotted</td></tr> <tr><td>2</td><td>Failed pre-funding</td></tr> <tr><td>3</td><td>Duplicate application</td></tr> <tr><td>4</td><td>Incomplete information</td></tr> <tr><td>5</td><td>Invalid BCAN</td></tr> <tr><td>6</td><td>EIPO default</td></tr> <tr><td>99</td><td>Others</td></tr> </tbody> </table>	ID Type	Description	0	Allotted	1	Not allotted	2	Failed pre-funding	3	Duplicate application	4	Incomplete information	5	Invalid BCAN	6	EIPO default	99	Others						
ID Type	Description																											
0	Allotted																											
1	Not allotted																											
2	Failed pre-funding																											
3	Duplicate application																											
4	Incomplete information																											
5	Invalid BCAN																											
6	EIPO default																											
99	Others																											



3.12	intDuplicateIndicator	String	1	If the subscription has been identified as a duplicate within the HKSCC Participant's subscription list, then "1". Else, the response will return "0".
3.13	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = the individual request has passed all validation checks</li> <li>▪ Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li> </ul>
3.13.1	recordErrorCode	String	6	
3.13.2	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS.
6	nextCursor	String	20	The key reference (recordID) immediately after the final result of response. If there are no further records, "0" will be returned.
7	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = no structural or permission-related error(s) were identified across the entire request</li> <li>▪ Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li> </ul>
7.1	recordErrorCode	String	6	
7.2	recordErrorMsg	String	100	

```

{
    "code": "0",
    "message": "",
    "data": {
        "stkCode": "9988",
        "isin": "KYG017191142",
        "status": "25",
        "subFlowStatus": "3",
        "recordID": "2462303930948573A ",
        "idList": [
            {
                "idType": "1",
                "idCountryJurisdiction": "HKG",
                "idNum": "A123456(9)",
                "fullNameEng": "Chan Tai Man",
                "fullNameChi": "陳大文"
            },
            {
                "idType": "1",
                "idCountryJurisdiction": "HKG ",
                "idNum": "B234567(1)",
                "fullNameEng": "Chan Siu Man",
                "fullNameChi": "陳小文"
            },
            {
                "idType": "1",
                "idCountryJurisdiction": "HKG ",
                "idNum": "B234567(1)",
                "fullNameEng": "Mary Lee Sum See",
                "fullNameChi": "李心思"
            }
        ],
        "appQuantity": "1000",
        "allotQuantity": "100",
        "firmID": "00000",
        "ownRef": null,
    }
}

```

```
    "unsuccessfulReason": "0",
    "intDuplicateIndicator": "0",
    "exception": []
  },
  {
    "stkCode": "9988",
    "isin": "KYG017191142",
    "status": "25",
    "subFlowStatus": "3",
    "recordID": "4317515259216099A ",
    "idList": [{
      "idType": "4",
      "idCountryJurisdiction": "OTH",
      "idNum": "A1B200D4E5F6G7H8I9J0",
      "fullNameEng": "Alpha Company Ltd",
      "fullNameChi": "甲有限公司"
    }],
    "appQuantity": "5000",
    "allotQuantity": "500",
    "firmID": "00000",
    "ownRef": null,
    "unsuccessfulReason": "0",
    "intDuplicateIndicator": "0",
    "exception": []
  },
  {
    "stkCode": "9988",
    "isin": "KYG017191142",
    "status": "25",
    "subFlowStatus": "3",
    "recordID": "5365467074774676A ",
    "idList": [{
      "idType": "1",
      "idCountryJurisdiction": "HKG",
      "idNum": "C345678(A)",
      "fullNameEng": "",
      "fullNameChi": "Rémy Victor"
    }],
    "appQuantity": "500000",
    "allotQuantity": "50000",
    "firmID": "00000",
    "ownRef": null,
    "unsuccessfulReason": "0",
    "intDuplicateIndicator": "0",
    "exception": []
  }],
  "totalSize": 3,
  "timestamp": "2021-08-26 12:30:29",
  "nextCursor": "0",
  "exception": []
}
```



## 8 EIPO Funding

### 8.1 Enquire EIPO Funding

#### 8.1.1 Request

**POST** /api/eipo/funding/query/v1

#	Field	Type	Length	Required	Description										
1	data	Object		Yes											
1.1	ipoID	String	20	No	Must be a valid ipoID from the Enquire IPO List API endpoint. Mandatory if transactionRef [Field #1.2] = null or blank.										
1.2	transactionRef	Array of String	1000*13	No	Must be a valid transactionRef assigned to the HKSCC Participant's EIPO subscriptions within an IPO. Mandatory if ipoID [Field #1.1] = null or blank.										
1.3	preFundingStatus	String	2	No	Sub-flow status of the Transaction Reference, expressed as status codes: <table border="1" data-bbox="785 745 1487 878"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Pending</td> </tr> <tr> <td>20</td> <td>Confirmed</td> </tr> <tr> <td>30</td> <td>Rejected</td> </tr> <tr> <td>40</td> <td>Invalidated</td> </tr> </tbody> </table> During the public offer book open (before the Pre-funding Requirement is finalised), this field returns as null.	Code	Description	10	Pending	20	Confirmed	30	Rejected	40	Invalidated
Code	Description														
10	Pending														
20	Confirmed														
30	Rejected														
40	Invalidated														
2	size	Integer	18	No	Expected page size of the API response. Must be between 1 and 1,000. If null or blank, default as 100.										
3	nextCursor	String	20	Yes	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.										

```
{
  "data": {
    "ipoID": "1234",
    "transactionRef": null,
    "preFundingStatus": null
  },
  "size": 100,
  "nextCursor": "0"
}
```

```
{
  "data": {
    "ipoID": "1234",
    "transactionRef": ["1241677736293", "1614124660146", "4557626203254"],
    "preFundingStatus": null
  },
  "size": 100,
  "nextCursor": "2244"
}
```

```
{
  "data": {
    "ipoID": "1234",
    "transactionRef": ["1241677736293", "1614124660146", "4557626203254"],
    "preFundingStatus": "10"
  },
  "size": 100,
  "nextCursor": "5835245508721"
}
```

## 8.1.2 Response

#	Field	Type	Length	Description																								
1	code	String	6	0 to indicate 'successful response'.																								
2	message	String	100	Empty string, i.e. "" to indicate successful response.																								
3	data	Array																										
3.1	ipolD	String	20	A unique, sequentially-generated value assigned to each IPO case stored on FINI. Used as the identifier for IPOs within the FINI API Gateway.																								
3.2	stkCode	String	10	The IPO's stock code.																								
3.3	isin	String	12	The IPO's ISIN.																								
3.4	status	String	2	The status of the IPO, expressed in status codes: <table border="1" data-bbox="735 607 1434 920"> <thead> <tr> <th>Status</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>Deal Initiated</td> </tr> <tr> <td>30</td> <td>Public Offer Closed</td> </tr> <tr> <td>35</td> <td>Application Validated</td> </tr> <tr> <td>45</td> <td>Allotment Confirmed</td> </tr> <tr> <td>50</td> <td>Money Settlement</td> </tr> <tr> <td>55</td> <td>Allocation Confirmed</td> </tr> <tr> <td>60</td> <td>Placing Approved</td> </tr> <tr> <td>65</td> <td>Allotment Results Approved</td> </tr> <tr> <td>70</td> <td>Trading Started</td> </tr> <tr> <td>80</td> <td>Suspended</td> </tr> <tr> <td>90</td> <td>Cancelled</td> </tr> </tbody> </table>	Status	Description	25	Deal Initiated	30	Public Offer Closed	35	Application Validated	45	Allotment Confirmed	50	Money Settlement	55	Allocation Confirmed	60	Placing Approved	65	Allotment Results Approved	70	Trading Started	80	Suspended	90	Cancelled
Status	Description																											
25	Deal Initiated																											
30	Public Offer Closed																											
35	Application Validated																											
45	Allotment Confirmed																											
50	Money Settlement																											
55	Allocation Confirmed																											
60	Placing Approved																											
65	Allotment Results Approved																											
70	Trading Started																											
80	Suspended																											
90	Cancelled																											
3.5	transactionRef	String	13	The Transaction Reference assigned to the HKSCC Participant's EIPO subscriptions within the IPO.																								
3.6	preFundingStatus	String	2	Sub-flow status of the Transaction Reference, expressed as status codes: <table border="1" data-bbox="735 1084 1434 1216"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Pending</td> </tr> <tr> <td>20</td> <td>Confirmed</td> </tr> <tr> <td>30</td> <td>Rejected</td> </tr> <tr> <td>40</td> <td>Invalidated</td> </tr> </tbody> </table> <p>During the public offer book open (before the Pre-funding Requirement is finalised), this field returns as null.</p>	Code	Description	10	Pending	20	Confirmed	30	Rejected	40	Invalidated														
Code	Description																											
10	Pending																											
20	Confirmed																											
30	Rejected																											
40	Invalidated																											
3.7	settlementStatus	String	2	Settlement status of the Transaction Reference, expressed as status codes: <table border="1" data-bbox="735 1368 1434 1500"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>Pending</td> </tr> <tr> <td>20</td> <td>Settled</td> </tr> <tr> <td>30</td> <td>Rejected</td> </tr> <tr> <td>40</td> <td>Defaulted</td> </tr> </tbody> </table> <p>Before the public offer allotment is made available, this field returns as null.</p>	Code	Description	10	Pending	20	Settled	30	Rejected	40	Defaulted														
Code	Description																											
10	Pending																											
20	Settled																											
30	Rejected																											
40	Defaulted																											
3.8	ipolInfo	Object																										
3.8.1	tradeCurrency	String	3	The IPO's trading currency, expressed as currency codes: <table border="1" data-bbox="735 1671 1434 1774"> <thead> <tr> <th>Currency</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>HKD</td> <td>Hong Kong Dollar</td> </tr> <tr> <td>CNY</td> <td>Chinese Yuan</td> </tr> <tr> <td>USD</td> <td>United States Dollar</td> </tr> </tbody> </table>	Currency	Description	HKD	Hong Kong Dollar	CNY	Chinese Yuan	USD	United States Dollar																
Currency	Description																											
HKD	Hong Kong Dollar																											
CNY	Chinese Yuan																											
USD	United States Dollar																											
3.8.2	priceMin	Decimal	12,3	The minimum offer price of the IPO.																								
3.8.3	downwardPriceFlex	Decimal	3,0	The percentage at which the IPO company may price its IPO below the minimum offer price. Example: "10" = 10%.																								
3.8.4	priceFloor	Decimal	12,3	The lowest possible price for the IPO, calculated as priceMin * (1 – downwardPriceFlex).																								
3.8.5	priceMax	Decimal	12,3	The minimum offer price of the IPO.																								

3.8.6	upwardPriceFlex	Decimal	6,0	The percentage at which the IPO company may price its IPO above the maximum offer price. Example: "10" = 10%.
3.8.7	priceCeiling	Decimal	12,3	The highest possible price for the IPO, calculated as priceMax * (1 + upwardPriceFlex).
3.8.8	priceFinal	Decimal	12,3	The final offer price of the IPO.
3.8.9	poMaxValue	Decimal	20,2	The highest value the IPO company is able to allocate to the public offer.
3.8.10	prefundingDate	String	19	The date for confirming the HKSCC Participants' pre-funding requirements.
3.9	fundingInfo	Object		
3.9.1	partID	String	6	The HKSCC Participant's ID within CCASS.
3.9.2	partName	String	80	The HKSCC Participant's ID fully company name.
3.9.3	poMaxOptIn	String	1	To indicate whether the HKSCC Participant has opted in to poMax for the pre-funding requirement calculations. "Y" = Yes, "N" = No.
3.9.4	totalAppQuantity	String	20	The total number of securities subscribed by the HKSCC Participant within the IPO.
3.9.5	appValue	Decimal	20,2	The total value of securities subscribed by the HKSCC Participant within the IPO.
3.9.6	prefundingReq	Decimal	20,2	The HKSCC Participant's pre-funding requirement. If the HKSCC Participant's poMaxOptIn = "Y", then it is calculated as the lower figure between poMax Value and appValue. If the HKSCC Participant's poMaxOptIn = "N", then it is the appValue.
3.9.7	totalAllotQuantity	String	20	The total number of securities allotted to the HKSCC Participant within the IPO.
3.9.8	allotValue	Decimal	20,2	The total value of securities allotted the HKSCC Participant within the IPO.
3.10	bankAcctInfo	Object		
3.10.1	cpBankCode	String	3	The bank code of the HKSCC Participant's designated bank account from which the pre-funding requirement should be transferred.
3.10.2	cpBranchCode	String	3	The branch code of the HKSCC Participant's designated bank account from which the pre-funding requirement should be transferred.
3.10.3	cpBankAcctNum	String	9	The bank account number of the HKSCC Participant's designated bank account from which the pre-funding requirement should be transferred.
3.10.4	nomBankCode	String	3	The bank code of the EIPO Designated Bank's nominee bank account to which the pre-funding requirement should be transferred.
3.10.5	nomBranchCode	String	3	The branch code of the EIPO Designated Bank's nominee bank account to which the pre-funding requirement should be transferred.
3.10.6	nomBankAcctNum	String	9	The bank account number of the EIPO Designated Bank's nominee bank account to which the pre-funding requirement should be transferred.
3.11.7	debtorRef	String	40	The debtor reference of the EIPO Designated Bank's nominee bank account to which the pre-funding requirement should be transferred.
3.11	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = the individual request has passed all validation checks</li> <li>▪ Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li> </ul>
3.11.1	recordErrorCode	String	6	
3.11.2	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	nextCursor	String	20	The key reference (transactionRef) immediately after the final result of response. If there are no further records, "0" will be returned.
7	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"> <li>▪ Empty array = no structural or permission-related error(s) were identified across the entire request</li> <li>▪ Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li> </ul>
7.1	recordErrorCode	String	6	
7.2	recordErrorMsg	String	100	

```

{
  "code": "0",
  "message": "",
  "data": {
    "ipoID": "1234",
    "stkCode": "9988",
    "isin": "KYG017191142",
    "status": "25",
    "transactionRef": "1241677736293",
    "preFundingStatus": "10",
    "settlementStatus": null,
    "ipoInfo": {
      "tradeCurrency": "HKD",
      "priceMin": 0.000,
      "downwardPriceFlex": 0,
      "priceFloor": 0.000,
      "priceMax": 188.000,
      "upwardPriceFlex": 10,
      "priceCeiling": 206.800,
      "priceFinal": 176,
      "poMaxValue": "10449004280.00",
      "prefundingDate": "2020-09-30"
    },
    "fundingInfo": {
      "partID": "B01130",
      "partName": "BOCI SECURITIES",
      "poMaxOptIn": "Y",
      "totalAppQuantity": "1000000",
      "appValue": 208980085.60,
      "prefundingReq": 208980085.60,
      "totalAllotQuantity": null,
      "allotValue": null
    },
    "bankAcInfo": {
      "cpBankCode": "012",
      "cpBranchCode": "001",
      "cpBankAcctNum": "929874231",
      "nomBankCode": "012",
      "nomBranchCode": "004",
      "nomBankAcctNum": "612352324",
      "debtorRef": "ABCEDFGH"
    },
    "exception": []
  },
  {
    "ipoID": "1234",
    "stkCode": "9988",
    "isin": "KYG017191142",
    "status": "25",
    "transactionRef": "1614124660146",
    "preFundingStatus": "10",
    "settlementStatus": "",
    "ipoInfo": {
      "tradeCurrency": "HKD",
      "priceMin": 0.000,
      "downwardPriceFlex": 0,
      "priceFloor": 0.000,
      "priceMax": 188.000,
      "upwardPriceFlex": 10,
      "priceCeiling": 206.800,
      "priceFinal": 176,
      "poMaxValue": 10449004280.00,
      "prefundingDate": "2020-09-30"
    }
  }
}

```

```
    },
    "fundingInfo": {
      "partID": "B01345",
      "partName": "PHILLIP SECURITIES",
      "poMaxOptIn": "Y",
      "totalAppQuantity": 3400200,
      "appValue": 710574087.06,
      "prefundingReq": 710574087.06,
      "totalAllotQuantity": null,
      "allotValue": null
    },
    "bankAcclInfo": {
      "cpBankCode": "012",
      "cpBranchCode": "001",
      "cpBankAcctNum": "827634232",
      "nomBankCode": "012",
      "nomBranchCode": "004",
      "nomBankAcctNum": "612352324",
      "debtorRef": "BCDEFGHI"
    },
    "exception": []
  }
],
"totalSize": 2,
"timestamp": "2021-09-30 08:12:33",
"nextCursor": "0",
"exception": []
}
```



## 8.2 Confirm EIPO Funding

### 8.2.1 Request

POST /api/eipo/funding/confirm/v1

#	Field	Type	Length	Required	Description						
1	data	Array		Yes	Min 1 object, max 1,000 objects. Each object should contain 1 subscriptions (i.e. each request may process up to 1,000 subscriptions).						
1.1	transactionRef	String	13	Yes	Must be a valid Transaction Reference with a preFundingStatus = "10"						
1.2	preFundingStatus	String	2	Yes	The target pre-funding status to be amended by the API request. <table border="1"><thead><tr><th>Status</th><th>Description</th></tr></thead><tbody><tr><td>20</td><td>Confirm pre-funding</td></tr><tr><td>30</td><td>Reject pre-funding</td></tr></tbody></table>	Status	Description	20	Confirm pre-funding	30	Reject pre-funding
Status	Description										
20	Confirm pre-funding										
30	Reject pre-funding										

```
{
  "data": [
    {
      "transactionRef": "6398340114921",
      "preFundingStatus": "20"
    },
    {
      "transactionRef": "6398340114936",
      "preFundingStatus": "20"
    },
    {
      "transactionRef": "6398340114947",
      "preFundingStatus": "20"
    },
    {
      "transactionRef": "6398340114959",
      "preFundingStatus": "20"
    },
    {
      "transactionRef": "6398340114972",
      "preFundingStatus": "30"
    }
  ]
}
```

## 8.2.2 Response

#	Field	Type	Length	Description
1	code	String	6	0 to indicate 'successful response'.
2	message	String	100	Empty string, i.e. "" to indicate successful response.
3	data	Array		
3.1	transactionRef	String	13	The transactionRef from the original API request.
3.2	preFundingStatus	String	2	The latest preFundingStatus after processing the API request.
3.3	exception	Array		To indicate whether an individual request has failed any validation checks: <ul style="list-style-type: none"> <li>Empty array = the individual request has passed all validation checks</li> <li>Non-empty array = the individual request has a single or multiple errors, with each error expressed as an individual object</li> </ul>
3.31	recordErrorCode	String	6	
3.32	recordErrorMsg	String	100	
4	totalSize	Integer	18	Total size of the API response.
5	timestamp	String	19	Timestamp of the API response, in YYYY-MM-DD HH:MM:SS format.
6	exception	Array		To indicate whether the entire request failed any structural or permission-related validation checks: <ul style="list-style-type: none"> <li>Empty array = no structural or permission-related error(s) were identified across the entire request</li> <li>Non-empty array = the entire request was rejected due to a single or multiple structural or permission-related error(s), with each error expressed as an individual object</li> </ul>
6.1	recordErrorCode	String	6	
6.2	recordErrorMsg	String	100	

```

{
  "code": "0",
  "message": "",
  "data": [
    {
      "transactionRef": "6398340114921",
      "preFundingStatus": "20",
      "exception": []
    },
    {
      "transactionRef": "6398340114936",
      "preFundingStatus": "20",
      "exception": []
    },
    {
      "transactionRef": "6398340114947",
      "preFundingStatus": "20",
      "exception": []
    },
    {
      "transactionRef": "6398340114959",
      "preFundingStatus": "20",
      "exception": []
    },
    {
      "transactionRef": "6398340114972",
      "preFundingStatus": "30",
      "exception": []
    }
  ],
  "totalSize": 5,
  "timestamp": "2021-09-30 11:55:21",
}

```

```
"exception": []
```

```
}
```

## Hong Kong Exchanges and Clearing Limited

---

8/F, Two Exchange Square,  
8 Connaught Place,  
Central, Hong Kong

[hkexgroup.com](http://hkexgroup.com) | [hkex.com.hk](http://hkex.com.hk)

[info@hkex.com.hk](mailto:info@hkex.com.hk)  
T +852 2522 1122  
F +852 2295 3106