

INTERFACE SPECIFICATIONS

HKEX Orion Market Data Platform Mainland Market Data Hub Securities Market & Index Datafeed Products (OMD-C MMDH)

Version:V1.33 29 Apr 2021 © Copyright 2021 HKEX All Rights Reserved

DOCUMENT HISTORY

| Version | Date of Issue | Comments |
|---------|---------------|--|
| v1.0 | Nov 13, 2012 | First Distribution Version – internal date 21st Nov 2012 |
| v1.1 | Dec 31, 2012 | Revised Edition with the following updates: -Section 3.3.1: Additional notes on heartbeat added -Section 3.4.4: Added 3-byte filler -Section 3.10.1: Additional notes on the short sell field updates -Section 5.5 – Updated diagram -Appendix A: Added 1 new index and more information to the table |
| v1.2 | May 24, 2013 | Revised Edition with the following updates: - Section 1.3 – Message Formats column added - Section 3.1 – ASCII clarification added - Section 3.4.2 – Username field Description updated - Section 3.4.2 – Value "7" removed in 2nd bullet point and the table - Section 3.4.4 – Value "4" & "7" removed - Section 3.6.2 – Values column for field 'UnderlyingSecurityWeight' added with a note - Section 3.6.2 – Note (1) clarification added - Section 3.6.2 – Note (1) clarification added - Section 3.6.2 – Revise wordings for description of OrderID - Section 3.10.2 – Clarification added in the first paragraph - Section 3.10.2 – Values column of field "Currency Code" added with a note - Section 3.11.1 – Clarification on the second paragraph added - Section 5.7 – Phrase "6 consecutive unsuccessful logon attempts" in paragraph 1 removed - Sections related to Service Unavailable (previously 5.8 and 5.9) removed - Appendix A – Index table adjusted with 2 new indices and more content |
| v1.3 | Aug 1, 2013 | Revised Edition with the following updates: - 3.3.1 – Revised wording for description on sending heartbeat message - Section 4.2 – Clarification of order book for emptied books - Appendix A – CES China HK Mainland Index code adjusted |
| V1.4 | Oct 11, 2013 | Revised Edition with the following updates: - Section 2.2.2 – Updated system startup time - Section 3.9.3 – Add notes on Nominal Price - Section 3.10.1 – Add notes on trading statistics during auction session - Section 4.2 – Updated snapshot notes for market turnover |
| V1.5 | Nov 28, 2013 | Revised Edition with the following updates: - Section 3.9.3 – Updated note on Nominal Price - Section 3.10.2 – Clarification added in the first paragraph - Section 5.1 – Updated hyperlinks of the section numbers for Logon and Logon Response - Section 5.7 – Update note in paragraph 1 |
| V1.5A | Jun 30, 2014 | Revised Edition with the following updates: - Appendix A – adding one new indices CES China 280 Index |
| V1.6 | Jul 04, 2014 | Revised Edition with the following updates: Sections 1.1 and 1.4 - Add description and section for Scope of Information Sections 2.1.2 - Add clarifications on Connection Options Section 2.2 - Add notes on the possible test data transmission during non-production hours Section 2.2.2 - Updated the OMD-C MMDH normal startup time from 2:00am to 6:00am Sections 3.12, 3.12.1, 3.12.2 & Appendix A - Add information on new market information (Northbound Daily Quota Balance) via IndexSource "C" |
| V1.7 | Jul25, 2014 | Revised Edition with the following updates: - Sections 3.12.2 –Update the Note for Northbound Daily Quota Balance and add note to the value of IndexVolume field |
| V1.8 | 21 Nov 2014 | Revised Edition with the following updates: - Appendix A – adding two new indices CES Stock Connect Hong Kong Select 100 Index and CES Shanghai-Hong Kong Stock Connect 300 Index |
| V1.9 | 3 Feb 2015 | Revised Edition with the following updates: - Section 3.12.1 – Add description for index definition dissemination |

| | | - Section 3.12.2 – Add note to IndexVolume field for Northbound Daily Quota Balance value | |
|--------|-------------|---|--|
| V1.10 | 19 May 2015 | Revised Edition with the following updates: - Section 3.10.1 – Update description for Statistics (60) message | |
| V1.10A | 12 Aug 2015 | Revised Edition with the following updates: - Section 3.8.2 – Typo Correction - Appendix A – Update the index name "CSI HK Mainland Enterprises 50 Index" and add six new HSI indices | |
| V1.11 | 5 Aug 2015 | Revised Edition with the following updates: Effective Date Changes Phrase 1 of Introduction of Closing Auction Session (CAS) & CAS on 25 Jul Volatility Control Mechanism (VCM) 2016 - Section 1.3 – Add new messages Order Imbalance (56), Reference Price (43), VCM Trigger (23) VCM on 22 Aug - Section 3.2 – Add New MsgType for Order Imbalance (56), Reference Price (43), VCM Trigger (23) - Section 3.6.2 – Introduce two fields "VCM Flag" and "CAS Flag" in Securities Definition - Section 3.7.1 – New field values for new trading sessions in CAS - Section 3.9.4 – Revise description of Indicative Equilibrium Price (41) message - Section 3.9.5 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 3.9.6 – Add new VCM Trigger (23) message - Section 4.2 – Include Order Imbalance (56), Reference Price (43), VCM Trigger (23) in refresh service | |
| V1.11B | 14 Dec 2015 | Effective Date Changes Immediate Clarifications Immediate Section 3.11.1 – Revise the description for Statistics (60) message to reflect the change effective in mid 2015 that Statistics message will be sent after every trade including off-exchange trades reported during auction session Phrase 1 of Other Enhancements 2016 Section 3.6.2 – Format change to Security Definition (11) message to insert a number of fillers inside the message Section 3.6.2 – Add new possible value "O" for others for the data field CallPutFlag in addition to the existing possible values "C" for Call and "P" for Put | |
| V1.12 | 01 Mar 2016 | Revised Edition with the following updates Effective Date Changes Immediate Clarifications • Section 3.7.2 – Rename the data field "SecurityTradingStatus" (at Offset#8) to "SuspensionIndicator" and revise its description 18 Apr 2016 Launch of new Index Appendix A – Add new index "CES Gaming Top 10 Index" Phrase 1 of CAS on 25 Jul 2016 Clarifications • Section 3.9.5 – Revise description for Reference Price message | |
| V1.13 | 10 May 2016 | Revised Edition with the following updates Effective Date Changes Immediate Clarifications • Sections 3.7.1 and 3.9.6 – Revise descriptions for Time fields to align across the document 23 May 2016 Renaming of CES Shanghai-Hong Kong Stock Connect 300 Index • Appendix A – Rename "CES Shanghai-Hong Kong Stock Connect 300 Index" to "CES Stock Connect 300 Index" | |

| | | Pewised Edition w | ith the following updates |
|-------|-------------|-------------------|--|
| | | Effective Date | Changes |
| | | Immediate | Clarifications |
| | | Immediate | |
| | 04 1 0040 | 5.5. 0010 | Sections 3.2 and 3.7.1 – Enhance descriptions to clarify Time fields |
| V1.14 | 21 Jun 2016 | 5 Dec 2016 | Launch of Shenzhen - Hong Kong Stock Connect |
| | | | Section 3.12.2 – Include Northbound Daily Quota Balances of Shenzhen Hong |
| | | | Kong Stock Connect |
| | | | Appendix A - Add new market information for Northbound Daily Quota Balance |
| | | | of Shenzhen-Hong Kong Stock Connect |
| | | Revised Edition w | ith the following updates |
| | | Effective Date | Changes |
| | | Immediate | Clarifications |
| | | minodiato | Section 3.2 – Enhance descriptions for InternalSeqNum |
| | | | Section 3.6.2 – Correct total length of message fields |
| | | | |
| | | | Section 3.12.1 and 3.12.2 – Revise to clarify IndexCode, NetChgPrevDay and NetChgPrevDayPat |
| V1.15 | 04 Aug 2016 | 29 Aug 2016 | NetChgPrevDayPct Launch of new Indices |
| | | 23 Aug 2010 | Sections 2.2.3 and 2.2.4 – Enhance to clarify descriptions |
| | | | |
| | | | Section 3.1.2 – Add CNH |
| | | | Section 3.12.1 – Add new IndexSource |
| | | | Section 3.12.2 – Add TR under descriptions of PreviousSesClose |
| | | | Appendix A – Add 4 new HKEX and Thomson Reuters co-branded indices |
| | | | |
| | | | ith the following updates |
| | | Effective Date | Changes |
| V1.16 | 24 Aug 2016 | 29 Aug 2016 | Launch of new Indices |
| | | | Appendix A – HKEX and Thomson Reuters co-branded indices are listed as |
| | | | Third Party Content under the Licence Agreement |
| | | | |
| | | | ith the following updates |
| | | Effective Date | Changes |
| | | Immediate | Clarifications |
| | | | Section 3.10.2 – Revise description for Market Turnover message |
| | | Jun 2017 | Launch of Stock Connect Market Feed |
| | | | Section 1.3 – Include Stock Connect Data in Summary Table |
| V1.17 | 03 Feb 2017 | | Section 1.4 – Include Stock Connect Data in Scope of Information |
| | | | Section 3.2 – Include Stock Connect Daily Quota Balance (80) and Stock |
| | | | Connect Market Turnover (81) in MsgType list |
| | | | Section 3.13 – Introduce new messages on Stock Connect Data including |
| | | | Stock Connect Daily Quota Balance (80) and Stock Connect Market Turnover |
| | | | (81) |
| | | | Section 4.2 - Include Stock Connect Data in Refresh Service |
| | | L | |
| | | Dovigod Edition | ith the following updates |
| | | Effective Date | ith the following updates Changes |
| V1.18 | 27 Feb 2017 | | Removal of Index |
| V1.18 | 27 Feb 2017 | 1 Apr 2017 | Appendix A – Remove "H11124 – CSI Overseas Mainland Enterprises Index |
| | | | Appendix A – Remove "H11124 – CSI Overseas Mainland Enterprises Index (HKD)" |
| | | | |
| | | Device of Exitin | |
| | | Effective Date | ith the following updates |
| V1.19 | 27 Mar 2017 | Immediate | Changes Clarifications |
| | | mmediate | Section 2.2.2 – Revise description to clarify Start of Day |
| | | | Geolion 2.2.2 - Nevise description to cidility start of Day |
| | | | |

| V1.20 | 20 Oct 2017 | Revised Edition with the | e following undates |
|-------|-------------|--------------------------|--|
| 1.20 | 20 000 2017 | Effective Date | Changes |
| | | 30 Oct 2017 | Remove Daily Quota Balance (DQB) from Index Section 3.12.2 – Remove all description related to "CSCSHQ Northbound Daily Quota Balance of Shanghai-Hong Kong Stock Connect" and "CSCSZQ Northbound Daily Quota Balance of Shenzhen-Hong Kong Stock Connect" Appendix A – Remove "CSCSHQ Northbound Daily Quota Balance of Shanghai-Hong Kong Stock Connect" and "CSCSZQ Northbound Daily Quota Balance of Shenzhen-Hong Kong Stock Connect" |
| V1.21 | 9 Mar 2018 | Revised Edition with the | |
| | | Effective Date | Changes |
| | | 30 April 2018 | OMD-C Reference Data Enrichment : More product attributes are added to Security Definition (11) Section 3.6.2 – Redefine Securities Definition (11) message with the following changes: a) Replace reserved fillers with new reference data : Product Type; Upper Strike Price; Warrant Type; Call Price; Entitlement; and Number of Warrants per Entitlement b) Revise description of existing attributes to reflect the enlarged coverage after the enrichment Conversion Ratio Style c) Replace obsolete data fields with fillers Test Security Flag Underlying Security Weight d) Remove reference to basket warrants Include more indices in the Index Feed Appendix A – Add Index Code for the following new index/indices: a) CES Stock Connect Hong Kong Premier 50 Index Other housekeeping changes: Section 3.1.1 – Present Null Values in table format Section 3.1.3 – Remove Section 3.1.3 Decimal Value, related information have been included in Developer Guide Section 3.6.1, 3.6.2, 3.10.2, 3.11.1 – Change all references to "market" to "market segment" Section 3.7.1 – Replace obsolete Trading Session ID with filler Section 3.7.1 – Replace obsolete Trading Session ID with filler |

| V1.22 | 12 Sep 2018 | Revised Edition with the following updates | | |
|-------|-------------|--|--|--|
| | | Effective Date | Changes | |
| | | Immediate | Clarifications | |
| | | | Section 3.1.2 – Revise description for Currency Value | |
| | | | Appendix A – Update the note for CSI and CES index data | |
| | | 27 Oct 2018 | Include more indices in the Index Feed | |
| | | | Appendix A – Add Index Code for the following new indices: | |
| | | | a) Hang Seng Index (Gross Total Return Index) | |
| | | | b) Hang Seng Finance Sub-Index (Gross Total Return Index) | |
| | | | c) Hang Seng Utilities Sub-Index (Gross Total Return Index) | |
| | | | d) Hang Seng Properties Sub-Index (Gross Total Return Index) | |
| | | | e) Hang Seng Index Commerce & Industry Sub-Index (Gross Total | |
| | | | Return Index) | |
| | | | f) Hang Seng China Enterprises Index (Gross Total Return Index) | |

| | | g) Hang Seng Index (Net Total Return Index) h) Hang Seng Finance Sub-Index (Net Total Return Index) i) Hang Seng Utilities Sub-Index (Net Total Return Index) j) Hang Seng Properties Sub-Index (Net Total Return Index) k) Hang Seng Index Commerce & Industry Sub-Index (Net Total Return Index) l) Hang Seng China Enterprises Index (Net Total Return Index) |
|-------|-------------|--|
| V1.23 | 7 Nov 2018 | Revised Edition with the following updates Effective Date Changes 1 Dec 2018 Change of indices in the Index Feed • Appendix A Add Index Code for the following new index: a) CES HK Biotechnology Index Remove Index Code for the following index: b) CSI Cross-Straits 500 Index |
| V1.24 | 21 May 2019 | Effective Date Changes Immediate Clarification • Section 3.10.1 – Update description for Statistics (60) message 24 June 2019 Include more indices in the Index Feed • Appendix A – Add Index Code for the following new indices: a) CES China Semiconductor Index b) HKEX CNH Gold Futures – Excess Return Index c) HKEX CNH Gold Futures – Spot Price Index e) HKEX USD Gold Futures – Total Return Index f) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index f) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index g) HKEX USD Gold Futures – Spot Price Index |
| V1.25 | 19 Jun 2019 | Revised Edition with the following updates Effective Date Changes Immediate Introduction of Inline Warrant • Section 1.4 – Remove the instrument list from this section • Section 3.7.2 – Additional Product Type – 15 Warrant – Inline Warrant |
| V1.26 | 6 Sep 2019 | Revised Edition with the following updates Effective Date Changes 18 Jan 2020 Change on Password Policy • Section 2.2.1 – Update detail requirement of Password Policy • Section 3.4.2 – Update description on Password length • Section 3.4.3 – Remove value 100 from SessionStatus field |
| V1.27 | 31 Oct 2019 | Revised Edition with the following updates Effective Date Changes 10 Feb 2020 Introduction of New Spread Table Code Section 3.6.2 – Add Spread Table Code "04" |

| V1.28 | 26 Nov 2019 | Effective Date Changes Immediate Removal of indices in the Index Feed |
|--------|-------------|--|
| | | Appendix A - Remove the following indices: a) 0200900 - Hang Seng Mainland Healthcare Index b) 0201100 - Hang Seng IT Hardware Index c) 0201200 - Hang Seng Software & Services Index |
| V1.29 | 4 Dec 2019 | Revised Edition with the following updates Effective Date Changes 1 Jun 2020 Introduction of New Spread Table Code Section 3.7.2 – Add Spread Table Code "05" |
| V1.30 | 9 Mar 2020 | Revised Edition with the following updates Effective Date Changes 10 Mar 2020 Change of index code in the Index Feed • Appendix A – Index code change for following index: a) CES China Semiconductor Index |
| V1.31 | 6 Apr 2020 | Effective Date Changes 19 Oct 2020 Introduction of POS enhancement • Section 3.6.2 – Add new fields POSFlag, POSUpperLimit, POSLowerLimit and extra fillers • Section 3.7.1 – Update TradingSessionSubID value a) Modifiy description of TradingSessionSubID 101 b) Add TradingSessionSubID 101 c) Add TradingSessionSubID 108 c) Modify field value for all TradingSecStatus values • Section 3.8.5 – Modifiy description of Order Imbalance for Preopening session • Section 3.9.5 – Modify description to add information related to POS random matching • Appendix B – Add section for Reference price, Price band for order input, IEP and Order Imbalance information during Pre-Opening Session (POS) |
| V1.31a | 1 Jun 2020 | Revised Edition with the following updates Effective Date Changes 15 Jun 2020 Change of index name in the Index Feed • Appendix A – Index name change for following index: a) CES China Semiconductor Index is renamed as CES China Semiconductor Chips Index |
| V1.31b | 3 Aug 2020 | Effective Date Changes Include more indices in the Index Feed Appendix A – Add Index code for the following new indices: a) 0205000 - HSI ESG Index b) 0205100 - HSCEI ESG Index c) 0208300 - Hang Seng TECH Index Changes |
| V1.32 | 24 Sep 2020 | Edition with the following updates Effective Date Changes 12 Apr 2021 Update on Resilience Model enhancement on OMD-C • Section 7 – New session for missing index report and sample file |
| V1.32a | 5 Oct 2020 | Revised Edition with the following updates Effective Date Changes 19 Oct 2020 Updates on Introduction of POS enhancement • Section 3.6.2 – Additional description of message field "PreviousClosingPrice" in Security Definition (11) message to support Net asset value per unit (NAV) for ETFs and L&I Products on the first day of listing |

| V1.33 | 29 Apr 2021 | Revised Edition with the following updates | | |
|-------|-------------|--|---|--|
| | | Effective Date | Changes | |
| | | 31 May 2021 | Update on Introduction of new fields for Bonds Reference Data and | |
| | | tentatively | change of ETF Product Type in Security Definition (11) | |
| | | | • Section 3.6.2 – Add new Bonds specific fields: FaceValue, | |
| | | | DecimalsInFaceValue, FaceValueCurrency, MaturityDate and | |
| | | | InvestorType | |
| | | | Section 3.6.2 – Add new ETF Product Types: | |
| | | | 16 – Trust – Equity ETF; | |
| | | | 17 – Trust – Fixed Income and Money Market ETF; and | |
| | | | 18 – Trust – Commodities ETF | |
| | | | Remove ETF Product Type: 5 – Trust – Other ETF | |

CONTENTS

| DOCUMENT HISTORY2 | | | | |
|-------------------|--------------------------|----|--|--|
| CONTENTS | 5 | 9 | | |
| 1. INTE | RODUCTION | | | |
| 1.1 | Purpose | | | |
| 1.2 | READING GUIDE | | | |
| 1.3 | Summary Table | | | |
| 1.4 | Scope of Information | | | |
| 2. SYST | TEM OVERVIEW | 14 | | |
| 2.1 | SCOPE | 14 | | |
| 2.1.1 | TCP Protocol | | | |
| 2.1.2 | Connection Options | | | |
| 2.1.3 | Recovery Mechanisms | | | |
| 2.1.4 | Server Disconnection | | | |
| 2.2 | Session Management | 15 | | |
| 2.2.1 | Password Policy | | | |
| 2.2.2 | Start of Day | | | |
| 2.2.3 | Normal Transmission | | | |
| 2.2.4 | End of Day | | | |
| 2.2.5 | Error Recovery | | | |
| 2.3 | Trading Sessions | | | |
| 2.4 | RACE CONDITIONS | | | |
| 3. MES | SSAGE FORMATS | | | |
| 3.1 | DATA TYPES | | | |
| 3.1.1 | Null Values | | | |
| 3.1.2 | Currency Values | | | |
| 3.2 | Message Header | | | |
| 3.3 | Control Messages | | | |
| | Heartbeat | | | |
| 5.5.1 | | | | |
| 3.4 | LOGON | | | |
| 3.4.1 | Send Key (1105) | | | |
| 3.4.2 | Logon (1101) | | | |
| 3.4.3 | Logon Response (1102) | | | |
| 3.4.4 | Logout (1103) | | | |
| 3.5 | Refresh | | | |
| 3.5.1 | Refresh Request (1201) | | | |
| 3.5.2 | Refresh Response (1202) | | | |
| 3.5.3 | Refresh Complete (203) | | | |
| 3.6 | REFERENCE DATA | | | |
| 3.6.1 | Market Definition (10) | | | |
| 3.6.2 | Security Definition (11) | | | |
| 3.6.3 | Liquidity Provider (13) | | | |
| | | | | |

| APPEN | NDIX A | - LIST OF INDICES AND MARKET INFORMATION UNDER OMD INDEX | 64 |
|-------------------|---------------------------|---|----|
| 7. | MISSI | NG INDEX REPORT | 63 |
| 6. | AGGR | EGATE ORDER BOOK MANAGEMENT | 55 |
| 5.7 | | Account Locked (Intraday) | 54 |
| 5.6 | | Two Logons from Same Client | |
| 5.5 | | Change Password | |
| 5.4 | | PASSWORD CLOSE TO EXPIRY | |
| 5.3 | | Refresh (Data Out Of Range) | |
| 5.2 | | Restart (Data In Range) | 50 |
| 5.1 | | LOGON (START OF DAY) | 50 |
| 5. | MESS | AGE SCENARIOS | 50 |
| 4.2 | | REFRESH SERVICE | |
| 4.1 | | RESTART | |
| 4. | RECO | /ERY | _ |
| - | 13.2 | Stock Connect Darket Turnover (81) | |
| 3.13 <i>3.</i> | } 13.1 | STOCK CONNECT DATA Stock Connect Daily Quota Balance (80) | |
| 3. 3. | 12.1 12.2 | Index Definition (70) Index Data (71) | |
| 3. 3.12 | 11.1 , | News (22) | |
| 3.11 | | News | |
| 3. |) 10.1 10.2 10.3 | VALUE ADDED DATA Statistics (60) Market Turnover (61) Yield (44) | |
| 3. | 9.5 9.6 | Reference Price (43) VCM Trigger (23) | |
| 3. | 9.4 | Indicative Equilibrium Price (41) | |
| - | 9.2 9.3 | Closing Price (62) Nominal Price (40) | |
| 3.9 <i>3.</i> | 9.1 | Trade And Price Data Trade Ticker (52) | |
| 3. 3. | 8.3 8.4 8.5 | Aggregate Order Book Update (53) Broker Queue (54) Order Imbalance (56) | |
| | 8.1 8.2 | Add Odd Lot Order (33) Delete Odd Lot Order (34) | |
| 3.8 | 7.2 | Order Book Data | |
| 3. | 7.1 7.2 | Trading Session Status (20) Security Status (21) | |
| <i>3.</i> 3.7 | 6.4 | Currency Rate (14) | |
| | ~ . | | 20 |

| APPENDIX B – REFERENCE PRICE, PRICE BAND FOR ORDER INPUT, INDICATIVE EQUILIBRIUM PRICE AND ORDER | |
|--|-----|
| IMBALANCE DURING PRE-OPENING SESSION | .66 |

Contents

1. INTRODUCTION

1.1 **PURPOSE**

This document specifies the Binary interface of the HKEX Orion Market Data Platform ("OMD") for the MMDH (Mainland Market Data Hub).

This document is the Transmission Specification(s) of the relevant Datafeed(s) under your Market Data Vendor License Agreement or the Market Data End-User License Agreement ("License Agreement"). Please refer to Section 1.2 and the summary table at Section 1.3 and Section 1.4 for the information applicable to the Datafeed(s) under your License Agreement.

HKEX endeavors to ensure the accuracy and reliability of the information provided in this interface specification, but takes no responsibility for any errors or omissions or for any losses arising from decisions, action, or inaction based on this information. The Licensee shall not use such interface specifications for any purpose other than as expressly permitted under the Licence Agreement. No part of this document may be copied, distributed, transmitted, transcribed, stored in a retrieval system, translated into any human or computer language, or disclosed to third parties without written permission from HKEX-IS.

1.2 READING GUIDE

The chapters following this introduction are:

| Chapter 2: | System Overview |
|-------------|----------------------------------|
| Chapter 3: | Message Formats |
| Chapter 4: | Recovery |
| Chapter 5: | Message Scenarios |
| Chapter 6: | Aggregated Order Book Management |
| Appendix A: | List of Indices under OMD Index |

All chapters and appendices except Chapter 3 and Appendix A are applicable to all Datafeeds unless otherwise specified. In Chapter 3, there are indications* in individual sections/sub-sections for their applicability to individual Datafeeds, and Appendix A is applicable to OMD Index only. The information is also summarised in Section 1.3 Summary Table.

| * | Exam | ple |
|---|------|-------|
| | | ~ • • |

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.3.1 | • | • |

1.3 SUMMARY TABLE

| Section | Message Formats | OMD Securities Standard (SS) | OMD Index (Index) | |
|---------|------------------|---------------------------------|----------------------|--|
| 3.1 | Data Types | | | |
| 3.2 | Message Header | | | |
| 3.3 | Control Messages | | | |
| 3.4 | Logon | | | |
| 3.5 | Refresh | | | |
| 3.6 | Reference Data | | | |
| 3.7 | Status Data | | | |

| 3.8.1 | Add Odd Lot Order (33) | |
|--------|-----------------------------------|--|
| 3.8.2 | Delete Odd Lot Order (34) | |
| 3.8.3 | Aggregate Order Book Update (53) | |
| 3.8.4 | Broker Queue (54) | |
| 3.8.5 | Order Imbalance (56) | |
| 3.9.1 | Trade Ticker (52) | |
| 3.9.2 | Closing Price (62) | |
| 3.9.3 | Nominal Price (40) | |
| 3.9.4 | Indicative Equilibrium Price (41) | |
| 3.9.5 | Reference Price (43) | |
| 3.9.6 | VCM Trigger (23) | |
| 3.10.1 | Statistics (60) | |
| 3.10.2 | Market Turnover (61) | |
| 3.10.3 | Yield (44) | |
| 3.11.1 | News (22) | |
| 3.12 | Index Data | |
| 3.13 | Stock Connect Data | |

• The information supplied in the corresponding sub-section applies to the Datafeed(s)

▲ Complimentary service to the Datafeed(s).

Complimentary service

Odd Lot order information and Stock Connect Market Information will be provided in streaming mode as complementary services to clients subscribing to SS. Please refer to 3.8.1 and 3.8.2 for details on the odd lot order message; and refer to 3.13 for details on Stock Connect Data messages.

1.4 SCOPE OF INFORMATION

HKEX Orion Market Data Platform – Securities Market & Index Datafeed Products ("OMD-C") MMDH provides real time trading information of all instruments listed and traded on the securities market, indices and market information to the Licensees.

2. SYSTEM OVERVIEW


2.1 SCOPE

Mainland Market Data Hub ("MMDH") is a remote hub of the HKEX Orion Market Data Platform ("OMD") in Mainland China providing market data to local clients.

Data is represented in an efficient binary message format for all instruments listed on the Securities Market. It has been designed for high throughput and low latency.

2.1.1 TCP Protocol

In contrast to the OMD central system in Hong Kong which disseminates market real-time data to clients via multicast, MMDH provides real-time market data to clients in Mainland China via TCP.

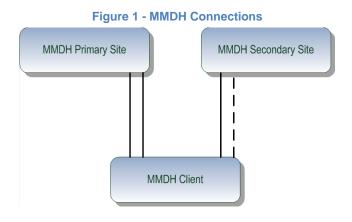

2.1.2 Connection Options

Client may choose one of the following connection options at MMDH:

Standard Configuration (with one live feed):

Under the standard configuration, each client is required to have a set of 3 leased lines, two connecting to the Primary Site and one connecting to the Secondary Site, to receive MMDH market data. An optional 4th connection can allow clients to connect two lines to the MMDH Secondary Site if desired. It should be noted that whilst 3 connections should be possible only one connection will ever be live at any one time. Multiple logons to MMDH are not permitted.

Non-Standard Configuration (with two live feeds):

Each client is required to have a set of 4 leased lines, two connecting to the Primary Site and two connecting to the Secondary Site, to receive MMDH market data. Clients can adopt to receive data transmission concurrently from both links to OMD Primary production system by using two distinct usernames to logon MMDH. OMD will operate the two links separately as if they were two primary links connected to two independent systems. Though clients can receive data concurrently from the two logons, multiple logons with same username is not allowed. Client who will supply OMD feeds to indirectly connected real-time vendors, subject to the Exchange's prior approval, is required to adopt the non-standard configuration with two live feeds.

A configuration document for client's network setup will be provided when the client has established the leased lines to the MMDH sites.

2.1.3 Recovery Mechanisms

The system provides two mechanisms for clients to recover possible data loss from disconnections, namely, Restart and Refresh. Please refer to section 4 (Recovery) for an explanation or sections 5.2 and 5.3 for examples.

2.1.4 Server Disconnection

In rare situations the MMDH Server may initiate a disconnection which may require clients to re-load all static data for all instruments. Clients should re-establish connection and logon again and then use the 'SessionStatus' field within the Logon Response message to determine appropriate recovery action. See section 3.4.3 (Logon Response) and section 4 (Recovery) for details.

2.2 SESSION MANAGEMENT

OMD-C MMDH does not operate on non-trading days of the Hong Kong Securities Market except those days when there are real-time index data calculated and disseminated by the index compiler. HKEX may perform system testing on Saturdays, Sundays or days when OMD-C MMDH is not in operation. Clients should treat data transmitted via OMD-C MMDH on those days as non production data and disregard them.

2.2.1 Password Policy

- Client account shall be locked for at least 30 minutes upon 6 consecutive unsuccessful logon attempts
- Client must change their password on the first logon attempt after the password is reset by HKEX due to whatever reason (e.g. client forgets the old password)
 - Passwords will expire after 90 calendar days
- Passwords should meet all the following items:

| Item | Requirement | | |
|--------------------------|---|--|--|
| Length of password | At least 16 characters | | |
| Complexity of password | Must contain a combination of: 1. Upper case letter 2. Lower case letter 3. Number 4. Special character as listed below: 4. Character ¹ Exclamation ^(a) At sign ^(a) At sign ^(a) Number sign (hash) ^(b) Dollar sign ^(c) Caret ^(b) At serisk ^(c) Left parenthesis ^(c) Right parenthesis ^(c) Right parenthesis | | |
| Enforce password history | Not the same as any of the last 5 passwords | | |

2.2.2 Start of Day

OMD-C MMDH is normally ready for a new business day at 6:00am. However, the Exchange has the right to adjust the system ready time in the future according to the different trading situations.

After a client has established a TCP connection the first message received will be a SendKey (1105) message with sequence number 1, and then following successful logon the client should expect to receive a Logon Response (1102) message with sequence number 2. On receipt of this message, the client must clear all cached data for all instruments. The static data for all markets, securities, liquidity providers and currency rates is published each day shortly after successful logon.

If a client connects to OMD-C MMDH after the start of business day and the amount of market data missed by the client is too large to be recovered through the Restart recovery mechanism, OMD-C MMDH will return a logon response to indicate they need to refresh.

2.2.3 Normal Transmission

Normal message transmission is expected between the time whenever there is any update either in OMD Securities Standard (SS) or OMD Index (Index)*. Heartbeats are sent regularly when there is no activity – the length of time between

heartbeats being specified in the Logon Response (1102) message. Under normal transmission the "SeqNum" field values in the message headers received (except heartbeats) by clients are consecutive and increasing. Reliable transmission is guaranteed by the TCP/IP protocol and gaps in transmission will not happen as long as the TCP connection is intact.

* Order and trade message transmission in SS is expected between when the market opens for trading and when the market is closed whereas message transmission in INDEX is expected between 8:00am to 3:00am, next day across midnight.

2.2.4 End of Day

OMD-C MMDH will normally be shut down shortly after 3:00am, next day across midnight thereupon will stop sending messages (including heartbeats). This shutdown time, however, is not rigid and the Exchange has the right to adjust this time according to the different trading situations.

2.2.5 Error Recovery

2.2.5.1 System Component Failure

If a system component fails and requires a failover or restart, there will be a short interruption in dissemination of data. When MMDH resumes operation, clients can reconnect based on the last sequence number received and in this way receive all messages during the outage period if those messages are still held in MMDH for Restart recovery or, otherwise, the latest market snapshot from Refresh.

Standard Configuration clients are recommended to attempt connecting in a round robin fashion via the 2 leased lines to MMDH Primary Site. Normally the clients can connect via any of the 2 leased lines to MMDH in the Primary Site unless MMDH failovers to the Secondary Site, by then the clients can connect via the leased line(s) to the MMDH in the Secondary Site.

Similarly, Non-Standard Configuration clients are recommended to connect separately via the 2 leased lines to MMDH Primary Site for the 2 live connections. When MMDH fails over to the Secondary Site, the clients can connect separately via the 2 leased lines to MMDH Secondary Site for the 2 live connections.

2.2.5.2 Disaster Recovery

Disaster Recovery services do exist and clients will be provided with a set of IP addresses for both the MMDH Primary and Secondary sites. The same username and password will apply to both.

Since sequence numbers between the Primary site and the Secondary site are not guaranteed to be the same a Refresh may be required. Clients should specify the 'InternalSeqNum' as 0 during their first Logon to the Secondary site and the MMDH system at Secondary site will respond with Restart recovery required or indicate the need for a Refresh. Any subsequent disconnects should continue to use the last seen number the same as for the MMDH Primary.

2.3 TRADING SESSIONS

Normally, trading is conducted in auction trading session(s) and continuous trading session(s) every trading day. However, there are situations where there is only half day trading with fewer trading session(s) (Christmas eve, New Year eve and Chinese New Year eve), or a trading session is suspended due to a typhoon etc. MMDH is not affected by the number of trading sessions and will continue to provide real time data as long as the Exchange's trading system is available.

2.4 RACE CONDITIONS

The information supplied in this section does not apply to OMD Index.

Since order, trade and reference data are transmitted to MMDH via separate paths this may lead to a race condition.

As an example the Trading Session Status (20) messages and market activity are decoupled; e.g. for a short time after a TradSesStatus of "Halted" is reported real-time data for that same market may continue to arrive.

3. MESSAGE FORMATS

3.1 DATA TYPES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.1 | | |

The following table lists all the data types used by OMD.

| Format | Description |
|--------|---|
| String | ASCII characters which are left aligned and padded with spaces, unless otherwise specified |
| Uint8 | 8 bit unsigned integer |
| Uint16 | Little-Endian encoded 16 bit unsigned integer |
| Uint32 | Little-Endian encoded 32 bit unsigned integer |
| Uint64 | Little-Endian encoded 64 bit unsigned integer |
| Int16 | Little-Endian encoded 16 bit signed integer |
| Int32 | Little-Endian encoded 32 bit signed integer |
| Int64 | Little-Endian encoded 64 bit signed integer |
| Binary | Unicode encoding used for Chinese characters which are left aligned and padded with binary null |

3.1.1 Null Values

From time to time certain fields cannot be populated and specific values are used to represent null. This is currently used within Int64 fields of the Index Data (71) message.

| Data Type | Null Representation | Example of Usage |
|-----------|---|--|
| Int64 | 0x8000000000000000 (Hex 2's complement) or -9223372036854775808 (Decimal) | HighValue, LowValue of Index Data (71) |

3.1.2 Currency Values

Please refer to the Third Schedule of Rules of the Exchange in HKEX website for possible ISO-4217 Currency Codes used in OMD-C. Apart from the Currency Codes listed in the aforesaid Schedule, OMD-C will also use the Currency Code listed below:

| Currency Code | Currency |
|---------------|-----------------------------|
| CNH | Chinese Renminbi (Offshore) |

HKEX may add or delete currency code(s), whenever applicable, in the future.

3.2 MESSAGE HEADER

| Section | OMD Securities Standard (SS) | OMD Index (Index) | |
|---------------|---------------------------------|----------------------|--|
| 3.2 | | | |
| | | | |
| Header and Da | ta sample layout: | | |

All messages will begin with the standard TCP Header followed by a variable number of Messages. This is true both for messages disseminated by OMD and client messages sent to the MMDH.

Message Header

| Offset | Field | Format | Len | Description |
|---------------|----------------|--------|-----|--|
| 0 | MsgLength | Uint16 | 2 | Size of the message (including the header) |
| 2 | Filler | String | 2 | |
| 4 | SeqNum | Uint32 | 4 | Sequence number of the message and is consecutive |
| 8 | InternalSeqNum | Uint32 | 4 | Internal MMDH sequence number |
| 12 | SendTime | Uint64 | 8 | The number of nanoseconds since midnight Coordinated Universal Time (UTC) of January 1, 1970, precision is provided to the nearest millisecond |
| Header length | | 20 | | |

SeqNum starts from 1 for each logon and increases with sequential consecutive sequence numbers.

InternalSeqNum should only be used in the event of intraday disconnection and in this case the last received InternalSeqNum should be provided in the Logon (1101) message – see section 3.4.2 Logon (1101) for details. This field is populated on every message except during refresh – refresh messages do not have an internal sequence number – see section 5.3 for details. InternalSeqNum is incremental but not necessarily consecutive. Client may find gaps in the InternalSeqNum values of consecutive messages.

When sending messages to the MMDH (e.g. Logon (1101) or Refresh Request (1201)), the same message header must also be used by clients. In this event the 'SeqNum' and 'InternalSeqNum' fields within the Message Header need not be populated. Note however the 'InternalSeqNum' field within the Logon message would need to be provided.

The format of each message will vary according to message type. However, regardless of the message type, each message will start with a two-byte message size (MsgSize) followed by a two-byte message type (MsgType). These are described in the following table.

| Field | Format | Len | Description |
|---------|--------|-----|---|
| MsgSize | Uint16 | 2 | Message length (including this field) |
| MsgType | Uint16 | 2 | Type of message. The valid values for MsgType are below: Logon (1101) Logon Response (1102)- MMDH Response |

Table 1: MsgSize and MsgType Fields

| Field | Format | Len | Description |
|-------|--------|-----|---|
| | | | Logout (1103) SendKey (1105) Refresh Request (1201) Refresh Response (1202) Refresh Complete (203) Market Definition (10) Security Definition (11) Liquidity Provider (13) Currency Rate (14) Trading Session Status (20) Security Status (21) Add Odd Lot Oder (33) Delete Odd Lot Order (34) Aggregate Order Book Update (53) Broker Queue (54) Order Imbalance (56) Trade Ticker (52) Closing Price (62) Nominal Price (40) Indicative Equilibrium Price (41) Reference Price (43) VCM Trigger (23) Statistics (60) Market Turnover (61) Yield (44) News (22) Index Definition (70) Index Data (71) Stock Connect Market Turnover (81) |

3.3 CONTROL MESSAGES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.3 | | |
| | | - |

3.3.1 Heartbeat

Heartbeats consist of a message header with length set to the message header length. They do not increment the sequence number. SeqNum is set to the sequence number of the previous message. The Heartbeat message will be identical for all the services.

When not sending data the Server will repeatedly send heartbeat messages every few seconds and the period is communicated by the HeartBtInterval sent in the Logon Response (1102) message.

Also, clients should repeatedly send a heartbeat message to the Server at all times to maintain the TCP connection. The heartbeat should be periodic – as defined by the HeartBtInterval field received in the Logon Response (1102) message. If the server does not receive the expected heartbeat messages from the client two times in a row, then the server will logout the client and the client will receive the Logout (1103) message. See section 3.4.4 Logout (1103).

3.4 LOGON

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index | | |
|---------|----------------|-----------|--|--|
| | Standard (SS) | (Index) | | |
| 3.4 | | | | |
| | | | | |

Refer to Logon 5.1 within Message Scenarios for details on the restart messages.

3.4.1 Send Key (1105)

Prior to commencing Logon, MMDH clients must first exchange cryptographic keys with the OMD system and this is achieved using the Diffie-Hellman key exchange algorithm. The keys are then used to encrypt the password or new password fields during logon.

Prime, Generator, Public Key and Initialization Vector parameters are required by the client to complete the key exchange, which are sent by the MMDH server to the client once a TCP session is established. These parameters are sent in the 'SendKey' message.

The following diagram shows the first three messages transferred during all Logon scenarios:

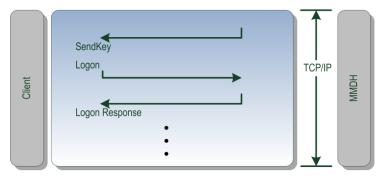


Figure 1 - SendKey and Logon

Step Client opens connection to Server

 On connection the Client is sent a SendKey (1105) message containing the Diffie-Hellman parameters and a concatenated public key and random Initialisation Vector "IV"

| Step 2 | Client calculates parameters and sends a Logon (1101) message | | | | | | | |
|-----------|--|--|--|--|--|--|--|--|
| | Client sets Diffie-Hellman parameters (prime, generator, subgroup order) from the values contained in the SendKey (1105) message | | | | | | | |
| • 0 | Client generates a random public and private key pair | | | | | | | |
| • 0 | Client creates a shared secret based on the OMD public key and the client private key | | | | | | | |
| • 0 | Client uses SHA-256 to hash the shared secret to enable the creation of an AES Key | | | | | | | |
| | Client encrypts the password using the generated AES Key in CFB mode, with the IV passed by the Server to the client (contained in the OMDPublicKey field) | | | | | | | |

- Client populates a Logon (1101) message containing the encrypted password and the client public key
- Note: the same method is used to encrypt the 'newpassword' field if password change is required



- Decrypts the password using the generated AES Key in CFB mode, with the server stored IV
- Continues normal logon procedure: e.g. authenticates the password against the password hash stored in the database, and checks for dual logon, etc.
- Populates a LogonResponse message

| Lient receives LogonResponse from Serve | Step 4 | Client receives LogonResponse from Server |
|---|-----------|---|
|---|-----------|---|

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------------|--------|-----|--|---------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 1105 Send Key |
| 4 | Prime | Data | 128 | A large Prime number in hexadecimal format | |
| 132 | Generator | Data | 128 | Generator – A primitive root modulo the value of Prime in hexadecimal format | |
| 260 | PrimeOrderSubgroup | Data | 128 | | |
| 388 | OMDPublicKey | Data | 144 | First 128 bytes: the Public Key being shared Last 16 bytes: the Initialization Vector | |
| Total Ler | ngth | | 532 | | |

3.4.2 Logon (1101)

The Logon (1101) message for clients enables both the mechanism for client authentication and password management.

Password length is between 16 and 20 characters.

Normal operation is as follows:-

Client sends Logon (1101) message containing username and encrypted password to the MMDH Publisher, which responds with the SessionStatus of 0 (Session active). The InternalSeqNum field will be used to assist with intra-day recovery but at start of day, should be set to 0. In the case of intra-day recovery the user can set the 'InternalSeqNum' field to the last received internal sequence number (this is one of the fields in the message header).

If the fields EncryptedNewPasswordLen and EncryptedNewPassword are populated, the logon attempt is seen as a password change attempt. During normal logon these fields should be empty.

See sections 5.1, 5.2, 5.3, 5.4 and 5.5 for diagrams showing the scenarios where this message is used.

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------------|--------|-----|---|------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 1101 Logon |
| 4 | Username | String | 12 | Username to log on, padded with binary null characters | |
| 16 | InternalSeqNum | Uint32 | 4 | Set to the last received internal sequence number; Or 0 at the start of the day | |
| 20 | ClientPublicKey | Data | 128 | Generated according to the algorithm shown above | |
| 148 | EncryptedPasswordLen | Uint8 | 1 | Length of the EncryptedPassword in bytes | Integer |
| 149 | EncryptedPassword | Data | 20 | AES Encrypted password | |
| 169 | EncryptedNewPasswordLen | Uint8 | 1 | Length of the EncryptedNewPassword in bytes | Integer |
| 170 | EncryptedNewPassword | Data | 20 | AES Encrypted new password | |
| Total Ler | Total Length | | 190 | | |

3.4.3 Logon Response (1102)

If the password is reset by HKEX Operations then the user should specify this password as well as their new password details during their next logon attempt – see Change Password Message scenario in Section 5.5 for details. If the user does not specify their new password details then the user will receive a Logon Response (1102) message "SessionStatus" set to "Password expired".

Further attempts to use an expired password will be rejected with reason of "password expired". If this happens, the Subscriber has to reattempt logon until a correct new password has been specified and accepted.

Notes:

- The client is expected to adhere to the HeartBtInterval populated within the logon response provided by MMDH to avoid disconnection see section 3.3.1 for details.
- A TCP disconnection will follow SessionStatus return values of 5, 6, 104 or 105. In these cases clients should reconnect and wait for a new SendKey(1105) message before re-attempting Logon.
- A user account may be locked by HKEX Operations or when users exceed the maximum number of logins permitted per day indicated by a SessionStatus return value of 6.

See sections 5.1, 5.2, 5.3, 5.4 and 5.5 for diagrams showing the scenarios where this message is used.

| Offset | Field | Format | Len | Description | Values |
|--------|-----------------|--------|-----|-----------------------|---------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 1102 Logon Response |
| 4 | HeartBtInterval | Uint16 | 2 | Heartbeat Interval | |
| 6 | SessionStatus | Uint8 | 1 | Status of the session | 0 Session active |

| Offset | Field | Format | Len | Description | Values |
|----------|--------------------|--------|-----|--|--|
| | | | | | 1Session passwordchanged2Session password due toexpire3New session passworddoes not comply with policy5Invalid username orpassword6Account locked8Password expired101Session Active - refreshrequired104105Client Public KeyGeneration Issue |
| 7 | PasswordExpiryDays | Uint8 | 1 | Number of days left before password expires | Numerical |
| Total Le | Total Length | | | | |

3.4.4 Logout (1103)

The logout message is issued from the MMDH to inform clients when they have been logged out. The server will follow with a TCP disconnect. See sections 5.6 and 5.7 for diagrams showing the scenarios where this message is used.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|----------|---------------|--------|-----|---------------------|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 1103 Logout |
| 4 | SessionStatus | Uint8 | 1 | Session Status | Account locked Logon from second connection Heartbeat timeout |
| 5 | Filler | String | 3 | | |
| Total Le | ngth | | 8 | | |

3.5 **REFRESH**

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.5 | | |

Refer to Refresh and restart scenarios within Message Scenarios, Section 5, for details on the Refresh and Restart messages.

3.5.1 Refresh Request (1201)

Used to request a Refresh of all market state from MMDH – for content detail refer to section 4.2 Refresh Service.

See section 5.3 for a diagram showing the scenario where this message is used.

| Message Fields | | | | | | | |
|----------------|-----------|---------|--------|-----|---------------------|----------------------|--|
| | Offset | Field | Format | Len | Description | Values | |
| | 0 | MsgSize | Uint16 | 2 | Size of the message | | |
| | 2 | MsgType | Uint16 | 2 | Type of message | 1201 Refresh Request | |
| | Total Ler | ngth | | 4 | | | |

3.5.2 Refresh Response (1202)

Used to acknowledge an application refresh request.

See section 5.3 for a diagram showing the scenario where this message is used.

| Message Fields |
|----------------|
|----------------|

| Offset | Field | Format | Len | Description | Values |
|--------------|---------------|--------|-----|--------------------------------|---------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 1202 Refresh Response |
| 4 | RefreshStatus | Uint8 | 1 | Status of the refresh response | O Request fully processed |
| 5 | Filler | String | 3 | | |
| Total Length | | | 8 | | |

3.5.3 Refresh Complete (203)

This message is published at the end of a refresh cycle to demonstrate that the system has re-sent all messages. Once all refresh data is sent, the client is up to date and will continue to receive normal data flow as messages arrive.

See section 5.3 for a diagram showing the scenario where this message is used.

| | 100 A 10 A |
|---------|------------|
| Maccada | Liolde |
| Message | FIEIUS |
| | |

| Offset | Field | Format | Len | Description | Values |
|--------------|--------------------|--------|-----|--|----------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 203 Refresh Complete |
| 4 | LastInternalSeqNum | Uint32 | 4 | The internal sequence number with this refresh (matches the Message Header) | Numerical |
| Total Length | | | 8 | | |

3.6 REFERENCE DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.6 | • | |

3.6.1 Market Definition (10)

The Market Definition message is generated at the start of the business day for each market segment.

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------------|--------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 10 Market Definition |
| 4 | MarketCode | String | 4 | Market segment identifier | MAIN GEM NASD ETS |
| 8 | MarketName | String | 25 | Market segment name | Alphanumerical |
| 33 | CurrencyCode | String | 3 | Base currency code of the market segment. | See Currency Values in section 3.1.2 for full details. |
| 36 | NumberOfSecurities | Uint32 | 4 | Number of securities within the market segment | |
| Total Ler | Total Length | | | | |

3.6.2 Security Definition (11)

This Security Definition (11) message contains all the reference data for a security.

Security Definition (11) messages may be received intraday – for example the 'FreeText' field may be updated during the day.

| Offset | Field | Format | Len | Description | Values |
|--------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 11 Security Definition |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | MarketCode | String | 4 | Market segment identifier | MAIN GEM NASD ETS |
| 12 | ISINCode | String | 12 | ISIN code of the security | |

| Offset | Field | Format | Len | Description | Values |
|--------|-------------------|--------|-----|---|--|
| 24 | InstrumentType | String | 4 | Instrument type of the security | BONDBondsEQTYEquitiesTRSTTrustsWRNTWarrants & Structuredproducts |
| 28 | ProductType | Uint8 | 1 | Product type of the security | Equity 1 Equity - Ordinary Shares 2 Equity - Preference Shares 6 Equity - Rights 7 Equity - Depository Receipt (HDR) - Ordinary Shares 12 Equity - Depository Receipt (HDR) - Preference Shares 12 Equity - Depository Receipt (HDR) - Preference Shares Warrant 3 Warrant - Derivative Warrant (DW) 11 Warrant - Callable Bull/Bear Contract (CBBC) 13 Warrant - Equity Warrant 14 Warrant - Equity Uinked Instrument (ELI) 15 Warrant - Inline Warrant Bond 4 Bond - Debt Security Trust 8 Trust - Real Estate Investment Trust (REIT) 9 Trust - Other Unit Trusts 10 Trust - Leveraged and Inverse Product (LIP) 16 Trust - Equity ETF 17 Trust - Fixed Income and Money Market ETF 18 Trust - Commodities ETF 9 Others - None of the above |
| 29 | Filler | String | 1 | | |
| 30 | SpreadTableCode | String | 2 | Spread table code of the security | 01 Part A* 03 Part B* 04 For Inline Warrant (same as Part A up to and include HK\$ 1.00 as per SEHK) 05 Part D* * Spread table as per Second Schedule of Rules of the Exchange |
| 32 | SecurityShortName | String | 40 | Security short name | |
| 72 | CurrencyCode | String | 3 | Security currency code of the market | See Currency Values in section 3.1.2 for full details. |
| 75 | SecurityNameGCCS | Binary | 60 | Security name in Traditional Chinese using Unicode | Unicode UTF-16LE encoded |
| 135 | SecurityNameGB | Binary | 60 | Security name in Simplified Chinese using Unicode | Unicode UTF-16LE encoded |
| 195 | LotSize | Uint32 | 4 | Board lot size for the security | |

| Offset | Field | Format | Len | Description | Values |
|---------|----------------------|--------|-----|--|--|
| 199 | Filler | String | 4 | | |
| 203 | PreviousClosingPrice | Int32 | 4 | Previous closing price of the security; or Net asset value (NAV) published by issuer for ETF or L&I Product on the trading day before its first day listing | 3 implied decimal places |
| 207 | VCMFlag | String | 1 | Indicates whether Volatility Control Mechanism (VCM) is applicable to the security | YVCM applicableNVCM not applicable |
| 208 | ShortSellFlag | String | 1 | Indicator for short-sell authorization | Y Short-sell allowed N Short-sell not allowed |
| 209 | CASFlag | String | 1 | Indicates whether Closing Auction Session (CAS) is applicable to the security | YCAS applicableNCAS not applicable |
| 210 | CCASSFlag | String | 1 | Indicates whether or not the security is a CCASS security | Y CCASS security N Non CCASS security |
| 211 | DummySecurityFlag | String | 1 | Dummy Security Flag | YDummy securityNNormal security |
| 212 | Filler | String | 1 | | |
| 213 | StampDutyFlag | String | 1 | Indicator for stamp duty requirement | YStamp duty requiredNStamp duty not required |
| 214 | Filler | String | 1 | | |
| 215 | ListingDate | Uint32 | 4 | Date of security listing | The representation is YYYYMMDD Value is 19000101 for unknown listing date |
| 219 | DelistingDate | Uint32 | 4 | Date of security delisting | The representation is YYYYMMDD. Value is 0 if no date exists. |
| 223 | FreeText | String | 38 | Free text associated to the security | Fixed length array of free text. When there is no free text, spaces will be present instead. |
| 261 | Filler | String | 62 | | |
| 323 | POSFlag | String | 1 | Indicates whether Pre-Opening Session (POS) is applicable to the security | YPOS applicableNPOS not applicable |
| 324 | POSUpperLimit | Int32 | 4 | Upper price limit of all orders in POS Order Input period, and At- auction Limit sell order in POS No Cancellation and Random Matching periods | 3 implied decimal places 0 means Not available |
| 328 | POSLowerLimit | Int32 | 4 | Lower price limit of all orders in POS Order Input period, and At- auction Limit buy order in POS No Cancellation and Random Matching periods | 3 implied decimal places 0 means Not available |
| 332 | Filler | String | 41 | | |
| Bonds S | pecific Data | | | | |
| 373 | EFNFlag | String | 1 | EFN Indicator | Y EFN N Non-EFN |
| 374 | AccruedInterest | Uint32 | 4 | Accrued interest of the security | 3 implied decimal places |

| Offset | Field | Format | Len | Description | Values |
|----------|--------------------------------|------------------|----------|--|--|
| 378 | CouponRate | Uint32 | 4 | Coupon rate of a bond security | 3 implied decimal places |
| 382 | Filler | String | 1 | | |
| 383 | FaceValue | Uint64 | 8 | Face value of a bond security | See DecimalsInFaceValue for the number of decimal places defined Not available |
| 391 | DecimalsInFaceValue | Uint8 | 1 | Number of decimal places in Face Value | Not applicable if FaceValue = 0 |
| 392 | FaceValueCurrency | String | 3 | Currency code of Face Value | See Currency Values in section 3.1.2 for full details. |
| 395 | MaturityDate | Uint32 | 4 | Date of maturity of a bond security | The representation is YYYYMMDD |
| 399 | InvestorType | String | 1 | Investor type of a bond security | R Retail InvestorP Professional Investor |
| 400 | Filler | String | 44 | | |
| Warrants | , Basket Warrants and Structur | ed Product speci | fic data | | |
| 444 | ConversionRatio | Uint32 | 4 | Conversion ratio for Structured Product | 3 implied decimal places |
| 448 | StrikePrice1 | Int32 | 4 | Strike price of the security if it has only one strike price, or Lower strike price of the security if it has lower and upper strike prices (i.e. upper strike price not = 0) | 3 implied decimal places |
| 452 | StrikePrice2 | Int32 | 4 | Upper strike price of the security if it has lower and upper strike prices | 3 implied decimal places Value is o if the securities has only one strike price |
| 456 | MaturityDate | Uint32 | 4 | Date of maturity of a warrant or structured security | The representation is YYYYMMDD |
| 460 | CallPutFlag | String | 1 | Indicator of whether the warrant or structured product is a call or put option | For Derivative Warrants / Inline Warrants: C Call P Put O Others For ELI & CBBC: C Bull P Bear / Rang |
| 461 | Style | String | 1 | Style of the warrant | AAmerican styleEEuropean style <blank>Other</blank> |
| 462 | Filler | String | 2 | | |
| 464 | WarrantType | String | 1 | Warrant type of the warrant | NNormal instrumentXExotic instrument"0"Not available |
| 465 | CallPrice | Int32 | 4 | Call price for CBBC | See DecimalsInCallPrice for the number of decimal places defined Not available |
| 469 | DecimalsInCallPrice | Uint8 | 1 | Number of decimal places in Call Price | Not applicable if CallPrice = 0 |
| 470 | Entitlement | Int32 | 4 | Entitlement of the warrant | See DecimalsInEntitlement for the number of decimal places defined |

| Offset | Field | Format | Len | Description | Values |
|--------------|--------------------------|--------|-----|---|---|
| | | | | | 0 Not available |
| 474 | DecimalsInEntitlement | Uint8 | 1 | Number of decimal places in Entitlement | Not applicable if Entitlement = 0 |
| 475 | NoWarrantsPerEntitlement | Uint32 | 4 | Number of warrants per entitlement | Not applicable if Entitlement = 0 |
| 479 | Filler | String | 63 | | |
| 542 | NoUnderlyingSecurities | Uint16 | 2 | Number of underlying security codes within this message | o for structured product of which the underlying is not a security defined in Security Definition (11) message 1 for structured product of which the underlying is defined in Security Definition (11) message |
| 544 | UnderlyingSecurityCode | Uint32 | 4 | 5-digit code identifying the underlying security | |
| 548 | Filler | Uint32 | 4 | | |
| Total Length | | | | | |

(nu = value of NoUnderlyingSecurities)

Note:

(1) PreviousClosingPrice may be set to 0, for example on the first day of listing of non-Exchange Traded Products (ETPs) (no existing previous closing price)

(2) Fields in Bonds Specific Data & Warrants and Structured Product Specific Data should be ignored if they are not applicable to the InstrumentType

3.6.3 Liquidity Provider (13)

The Liquidity Provider (13) message is generated at the start of the business day for securities that have at least one liquidity provider.

Message Fields

| Off | fset | Field | Format | Le n | Description | Values | |
|-----|--------------|----------------------|--------|-------------------|--|---|--------------------|
| | 0 | MsgSize | Uint16 | 2 | Size of the message | | |
| | 2 | MsgType | Uint16 | 2 | Type of message | 13 | Liquidity Provider |
| | 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 | |
| | 8 | NoLiquidityProviders | Uint16 | 2 | Number of liquidity providers within this message | 1 to 50 | |
| | 10 | LPBrokerNumber | Uint16 | 2 | Broker number of the liquidity provider | | |
| Tot | Total Length | | 10 - | + 2n _T | | | |

(n_T = value of NoLiquidityProviders)

3.6.4 Currency Rate (14)

The Currency Rate message provides the foreign exchange conversion rates between various foreign currencies and the Hong Kong dollar.

The Currency Factor and Currency Rate fields should be interpreted as below:

For example if 1 Euro is valued 10.22 HKD

- Currency Factor will be 0 (1 EUR)
- Currency Rate will be 102200 (4 decimals implied)

For example if 1000 Japanese Yen is worth 90.678 HKD

- Currency Factor will be 3 (1000 JPY)
- Currency Rate will be 906780 (4 decimals implied)

Message Fields

| Offset | Field | Format | Le n | Description | Values |
|-----------|----------------|--------|---------|-----------------------------|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 14 Currency Rate |
| 4 | CurrencyCode | String | 3 | Currency code. | See Currency Values in section 3.1.2 for full details. |
| 7 | Filler | | 1 | | |
| 8 | CurrencyFactor | Uint16 | 2 | Currency factor conversion. | A non-zero value n means all price fields for this security should be interpreted as a value equal to the price multiplied by 10^n . |
| 10 | Filler | | 2 | | |
| 12 | CurrencyRate | Uint32 | 4 | Currency rate | Rate, expressed in HKD for one foreign currency unit. 4 decimals implied. |
| Total Ler | ngth | | 16 | | |

3.7 STATUS DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.7 | | |
| | | |

3.7.1 Trading Session Status (20)

The Trading Session Status provides information on the status of a market segment. It is sent whenever there is change of trading session.

This message may not be synchronized with order and trade data.

| Offset | Field | Format | Len | Description | Values |
|--------|---------|--------|-----|---------------------|---------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 20 Trading Session Status |

| Offset | Field | Format | Len | Description | Values |
|-----------|-----------------------|--------|-----|--|--|
| 4 | MarketCode | String | 4 | Market segment identifier | MAIN GEM NASD ETS |
| 8 | Filler | Uint8 | 1 | | |
| 9 | TradingSessionSubID | Uint8 | 1 | Trading session sub-identifier | Not Yet Open (NO) Pre-opening Session: [POS] Order Input (OI) [POS] No Cancellation (NW) [POS] Random Matching (RM) [POS] Order Matching (MA) Blocking (BL) Continuous Trading Session: Continuous trading (CT) Closing Auction Sessions: [CAS] Reference Price Fixing (RP) [CAS] Order Input (OI) [CAS] Order Input (OI) [CAS] Order Matching (MA) Other Sessions: Coster Sessions: Coster CL CAS CLC CAS CLC CAS CLC CAS CLC |
| 10 | TradingSesStatus | Uint8 | 1 | Status of the current trading session | Unknown (for NO) Halted (for El) Pre-Open (for [POS] OI, NW, RM, MA, and BL) Open (for CT and OC) Pre-Close (for [CAS] RP, OI, NW, RC, MA) Closed (for CL) Day Closed (for DC) |
| 11 | TradingSesControlFlag | String | 1 | Indicates how control of trading session and sub-session transitions are performed | Automatic (Default) Manual (this invalidates the normal schedule for the day) |
| 12 | Filler | String | 4 | | |
| 16 | StartDateTime | Uint64 | 8 | Start time of the trading status | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970, precision is provided to the nearest second. Set to 0 if no time is available. |
| 24 | EndDateTime | Uint64 | 8 | End time of the trading status | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970, precision is provided to the nearest second. Set to 0 if no time is available. |
| Total Ler | ngth | | 32 | | |

3.7.2 Security Status (21)

The Security Status message is generated

- At the start of the business day if the security is not available for trading..
- Whenever a security state changes.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|---------------------|--------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 21 Security Status |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | SuspensionIndicator | Uint8 | 1 | Indicate whether the security is currently halted/ suspended for trading | 2 Trading Halt or Suspend3 Resume |
| 9 | Filler | String | 3 | | |
| Total Ler | Total Length | | 12 | | |

Note: 'Resume' in Suspension Indicator means the security is now available for trading,

3.8 ORDER BOOK DATA

This section includes definition of the following messages:

- Add / Delete Odd Lot Order for odd lot orders
- Aggregate Order Book Update for board lot orders
- Broker Queue for board lot orders

3.8.1 Add Odd Lot Order (33)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---|----------------------|
| 3.8.1 | (via complimentary odd lot order feed) | (|

Complimentary service to the Datafeed(s)

The Add Odd Lot Order message is generated when a new odd lot order is inserted into the order book.

| Offset | Field | Format | Len | Description | Values |
|--------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 33 Add Odd Lot Order |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |

| Offset | Field | Format | Len | Description | Values |
|-----------|----------|--------|-----|---|-------------------------------|
| 8 | Orderld | Uint64 | 8 | Unique identifier for each order performed within the trading day | Values may not be consecutive |
| 16 | Price | Int32 | 4 | Price | 3 implied decimal places |
| 20 | Quantity | Uint32 | 4 | Number of shares | |
| 24 | BrokerID | Uint16 | 2 | Integer identifier uniquely identifying the Broker | Integer |
| 26 | Side | Uint16 | 2 | Side of the order | 0 Bid 1 Offer |
| Total Ler | ngth | | 28 | | |

3.8.2 Delete Odd Lot Order (34)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|---|-----------|
| | Standard (SS) | (Index) |
| 3.8.2 | | |
| | (via complimentary odd lot order feed) | |

Complimentary service to the Datafeed(s)

The Delete Odd Lot Order message is generated when an existing odd lot order identified by the Orderld is deleted.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|---|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 34 Delete Odd Lot Order |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | Orderld | Uint64 | 8 | Unique identifier for each order performed within the trading day | Values may not be consecutive |
| 16 | BrokerID | Uint16 | 2 | Integer identifier uniquely identifying the Broker | Integer |
| 18 | Side | Uint16 | 2 | Side of the order | 0 Bid 1 Offer |
| Total Ler | Total Length | | | | |

3.8.3 Aggregate Order Book Update (53)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.8.3 | | |

Refer to Section 6 - Aggregate Order Book Management for details on the Aggregate Order Book Update message. The Aggregate Order Book Update message only applies to Board Lots.

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------|--------|--------------------------|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | МѕдТуре | Uint16 | 2 | Type of message | 53 Aggregate Order Book Update |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | Filler | String | 3 | | |
| 11 | NoEntries | Uint8 | 1 | Number of book entries within the message | |
| 12 | AggregateQuantity | Uint64 | 8 | Aggregated number of shares. | |
| 20 | Price | Int32 | 4 | Price | 3 implied decimal places |
| 24 | NumberOfOrders | Uint32 | 4 | Number of orders | |
| 28 | Side | Uint16 | 2 | Side of the order | 0 Bid 1 Offer |
| 30 | PriceLevel | Uint8 | 1 | Price level | |
| 31 | UpdateAction | Uint8 | 1 | Type of market data update action | 0 New 1 Change 2 Delete 74 Orderbook Clear |
| 32 | Filler | String | 4 | | |
| Total Ler | ngth | | 12 + 24n _O | | |

(no = value of NoEntries)

3.8.4 Broker Queue (54)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.8.4 | | |

The Broker Queue message contains the priority list of the (max) top 40 broker IDs for a given side, and is generated whenever any of the entries in the list are modified. Entries are ordered according to distance away from the best price with best price brokers being at the front of the queue. The queue will also include spread level entries between each price level, which are marked when the Type field is set to 'S'. When the Type field is set to 'S', there are two possibilities;

- The Item is non-zero indicating the number of spread levels away from the best price
- The Item is zero indicating that there are no brokers with orders at the spread level indicated by the previous entry of Type set to 'S'

Example: if the active offers are as below, and assuming a spread level is 0.01:

| Ask Price | Broker ID |
|-----------|-----------|
| 20.28 | 2137 |
| 20.28 | 4138 |
| 20.29 | 2141 |
| 20.29 | 5123 |
| 20.31 | 3145 |

Then the resulting Ask side Broker Queue will be represented as below:

| Entry | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------|------|------|---|------|------|---|---|---|------|
| Item | 2137 | 4138 | 1 | 2141 | 5123 | 2 | 0 | 3 | 3145 |
| Туре | В | В | S | В | В | S | S | S | В |

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-------------|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 54 Broker Queue |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | ItemCount | Uint8 | 1 | This field contains the number of items in the message – repeating items are shown indented below | 0 to 40 |
| 9 | Side | Uint16 | 2 | Side of the order | 1 Buy 2 Sell |
| 11 | BQMoreFlag | String | 1 | Flag indicating if there are more broker numbers in the queue | Y More broker numbers exist in the queue No more exist |
| 12 | Item | Uint16 | 2 | This field contains either the broker number or the number of spreads away from the best price | |
| 14 | Туре | String | 1 | Indicates the type of information contained in the item | B Broker numberS Number of Spread |
| 15 | Filler | String | 1 | | |
| Total Ler | Total Length | | 12 + 4nı | | |

(n1 = value of ItemCount)

3.8.5 Order Imbalance (56)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.8.5 | | |

The Order Imbalance message provides order imbalance information at the Indicative Equilibrium Price (IEP) during the Pre-Opening Session (POS) and Closing Auction Session (CAS).

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------------|--------|-----|---|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 56 Order Imbalance |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | OrderImbalanceDirection | String | 1 | Indicates the imbalance direction when the matchable buy quantity and sell quantity at IEP are not equal | N Buy = Sell B Buy Surplus S Sell Surplus <space> Not applicable, i.e. when IEP is not available</space> |
| 9 | Filler | String | 1 | | |
| 10 | OrderImbalanceQuantity | Uint64 | 8 | The absolute difference between the matchable buy quantity and the sell quantity at IEP Value should be ignored if Order Imbalance Direction is <space></space> | |
| 18 | Filler | String | 2 | | |
| Total Ler | ngth | | 20 | | |

3.9 TRADE AND PRICE DATA

3.9.1 Trade Ticker (52)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.9.1 | | |

The Trade Ticker is an aggregation of several trades into one message, combining quantities of subsequent trades made on a given instrument at a given fixed price.

When a trade is cancelled, a Trade Ticker message will be generated with the TickerID set to the ticker which contains the cancelled trade, and with the AggregateQuantity set to remaining quantity outstanding.

| Offset | Field | Format | Len | Description | Values |
|--------|--------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 52 Trade ticker |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | TickerID | Uint32 | 4 | Unique identifier per security for each trade ticker generated within the trading system. The | Starting from 1, incrementing by 1 for each trade ticker |

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------|--------|-----|--|---|
| | | | | ID is unique per security for each trading day | |
| 12 | Price | Int32 | 4 | Price | 3 implied decimal places |
| 16 | AggregateQuantity | Uint64 | 8 | Aggregated number of shares | Remaining quantity if TrdCancelFlag = Y |
| 24 | TradeTime | Uint64 | 8 | Time of trade | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970 TradeTime is up to seconds Not applicable when TrdCancelFlag = Y |
| 32 | TrdType | Int16 | 2 | Public trade type | Automatch normal (Public Trade Type <space>)</space> Late Trade (Off-exchange previous day) (Public Trade Type "P") Non-direct Off-Exchange Trade (Public Trade Type "M") Automatch internalized (Public Trade Type "Y") Direct off-exchange Trade (Public Trade Type "X") Odd-Lot Trade (Public Trade Type "D") Auction Trade (Public Trade Type "U") Not applicable when TrdCancelFlag = Y |
| 34 | TrdCancelFlag | String | 1 | Indicates that a trade covered in the original Trade Ticker has been cancelled | Y Cancelled N Not cancelled |
| 35 | Filler | String | 1 | | |
| Total Lei | Total Length | | 36 | | |

3.9.2 Closing Price (62)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.9.2 | | (Index) |

The Closing Price message is generated near the end of the business day for each security. If the closing price is not available, the field 'ClosingPrice' is set to 0.

| Off | fset | Field | Format | Len | Description | Values |
|-----|------|---------|--------|-----|---------------------|------------------|
| | 0 | MsgSize | Uint16 | 2 | Size of the message | |
| | 2 | MsgType | Uint16 | 2 | Type of message | 62 Closing Price |

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|--|---|
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | ClosingPrice | Int32 | 4 | Current Day Closing Price | 3 implied decimal places |
| 12 | Filler | String | 4 | | |
| Total Lei | Total Length | | | | |

3.9.3 Nominal Price (40)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.9.3 | | |

The Nominal Price message may be generated when an order is added, deleted or modified in a book or when trade or trade cancel is performed. Before the arrival of the first Nominal Price message, the nominal price should be the same as the previous closing price provided in the Security Definition (11) message.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 40 Nominal Price |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | NominalPrice | Int32 | 4 | Nominal price of a security | 3 implied decimal places |
| Total Ler | Total Length | | | | |

Note: Nominal Price may be 0 in specific cases (e.g. no reference price)

3.9.4 Indicative Equilibrium Price (41)

| The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [| | | | | | | |
|--|----------------|-----------|--|--|--|--|--|
| Section | OMD Securities | OMD Index | | | | | |
| | Standard (SS) | (Index) | | | | | |
| 3.9.4 | | | | | | | |

The Indicative Equilibrium Price (IEP) message is generated whenever there is change of the Indicative Equilibrium Price (IEP) or Indicative Equilibrium Volume (IEV) during the Pre-Opening Session (POS) or Closing Auction Session (CAS). The IEP will become 0 when IEP does not exist.

| Offset | Field | Format | Len | Description | Values |
|--------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 41 Indicative Equilibrium Price |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |

| Offset | Field | Format | Len | Description | Values |
|--------------|-------------------|--------|-----|-------------|--|
| 8 | Price | Int32 | 4 | IEP | 3 implied decimal places Value is 0 if IEP is not available |
| 12 | AggregateQuantity | Uint64 | 8 | IEV | |
| Total Length | | | 20 | | |

3.9.5 Reference Price (43)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.9.5 | | |

This message provides the reference price, lower and upper price limits for order input during an applicable auction session and will be sent again when there is any change of the reference price, lower and upper price limits during the session. Also the same information may be resent during the auction session.

For Pre-Opening Session (POS), a Reference Price message is generated at the beginning of No cancellation session for all securities applicable for POS. At Blocking session, all prices will be reset to zero.

Note: with regard to the upper and lower price limit for Order Input session in POS, please refer to the POS related fields in Security Definition (11).

For Closing Auction Session (CAS), a Reference Price message is generated at the start of the session for all the securities tradable on the day, regardless of whether it is a CAS applicable security or not.

| Offset | Field | Format | Len | Description | Values |
|-----------|----------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 43 Reference Price |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | ReferencePrice | Int32 | 4 | Reference price of the security for order input in POS and CAS. | 3 implied decimal places Value is 0 if the reference price is not available |
| 12 | LowerPrice | Int32 | 4 | Lower price limit of at-auction Limit sell order in POS No Cancellation and Random Matching periods Lower price of the allowed price band for order input in CAS | 3 implied decimal places o means N/A |
| 16 | UpperPrice | Int32 | 4 | Upper price limit of at-auction Limit buy order in POS No Cancellation and Random Matching periods Upper price of the allowed price band for order input in CAS | 3 implied decimal places o means N/A |
| Total Ler | ngth | | 20 | | |

Note: Reference Price may be 0 in special cases (e.g. no nominal price).

3.9.6 VCM Trigger (23)

| The information supplied in | n this section and its sub-s | ections applies to the Data | afeed(s) marked with [•] |
|-----------------------------|------------------------------|-----------------------------|---------------------------|
| Section | OMD Securities | OMD Index | |
| | Standard (SS) | (Index) | |
| 3.9.6 | | | |

The VCM Trigger message is generated whenever a cooling off period is triggered by Volatility Control Mechanism (VCM).

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|---------------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 23 VCM Trigger |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | CoolingOffStartTime | Uint64 | 8 | Time when the cooling off period starts | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970, precision is provided to the nearest second. |
| 16 | CoolingOffEndTime | Uint64 | 8 | Time when the cooling off period ends | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970, precision is provided to the nearest second. |
| 24 | VCMReferencePrice | Int32 | 4 | Reference Price for the cooling off period | 3 implied decimal places |
| 28 | VCMLowerPrice | Int32 | 4 | Lower price in the price band allowed during the cooling off period | 3 implied decimal places |
| 32 | VCMUpperPrice | Int32 | 4 | Upper price in the price band allowed during the cooling off period | 3 implied decimal places |
| Total Lei | ngth | | 36 | | |

3.10 VALUE ADDED DATA

3.10.1 Statistics (60)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.10.1 | | |

The Statistics message provides statistics including high/low prices and turnover. It is generated, excluding overseas trades, once after:

• all corresponding trades matched in Continuous Trading Session (CTS) or in an auction session

- manual trade
- odd lot trade
- trade cancel

The ShortSellSharesTraded and ShortSellTurnover fields (the shortsell fields) are only updated twice each day at most for securities with shortselling activities - at the end of the morning session if the shortsell fields are non-zero and at the end of the afternoon session if the value of any of the shortsell fields are different from that disseminated at the end of the morning session.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|-----------------------|--------|-----|---|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 60 Statistics |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | SharesTraded | Uint64 | 8 | Number of shares traded for a security | |
| 16 | Turnover | Int64 | 8 | Current turnover | 3 implied decimal places |
| 24 | HighPrice | Int32 | 4 | Highest trade price currently performed for a security | 3 implied decimal places |
| 28 | LowPrice | Int32 | 4 | Lowest trade price currently performed for a security | 3 implied decimal places |
| 32 | LastPrice | Int32 | 4 | Last trade price for a security | 3 implied decimal places |
| 36 | Filler | String | 4 | | |
| 40 | ShortSellSharesTraded | Uint32 | 4 | Number of short-sell shares traded for a security | |
| 44 | ShortSellTurnover | Int64 | 8 | Current short-sell turnover for a security | 3 implied decimal places |
| Total Lei | ngth | | 52 | | |

3.10.2 Market Turnover (61)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities Standard (SS) | OMD Index (Index) |
|---------|---------------------------------|----------------------|
| 3.10.2 | | |

The Market Turnover message contains the total turnover (excluding the turnover of overseas trades) for all securities on a given market segment for a given trading currency. It also provides the total turnover (excluding the turnover of overseas trades) for all securities regardless of trading currency on a given market segment in HKD equivalent. Under normal circumstances, the updates are disseminated around every 2 seconds during the trading hours.

When the CurrencyCode is blank, the turnover represents the total turnover traded on the given market segment for all trading currencies, expressed in HKD.

| С | Offset | Field | Format | Len | Description | Values |
|---|--------|---------|--------|-----|---------------------|--------|
| | 0 | MsgSize | Uint16 | 2 | Size of the message | |

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|--|---|
| 2 | MsgType | Uint16 | 2 | Type of message | 61 Market Turnover |
| 4 | MarketCode | String | 4 | Market segment identifier | MAIN GEM NASD ETS |
| 8 | CurrencyCode | String | 3 | Currency code of all securities of which the market turnover is derived | See Currency Values in section 3.1.2 for full details. Blank for total turnover for the Market Segment (i.e. MarketCode) in HKD equivalent. |
| 11 | Filler | String | 1 | | |
| 12 | Turnover | Int64 | 8 | Total Traded Turnover of the stocks traded on the market segment in the respective currency | 3 implied decimal places |
| Total Lei | ngth | | 20 | | |

3.10.3 Yield (44)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.10.3 | | |

The Yield message is generated for bond securities when their yield percentage changes.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|---|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 44 Yield |
| 4 | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| 8 | Yield | Int32 | 4 | Current yield of the bond security based on its coupon rate and nominal price | 3 implied decimal places o means Not available |
| Total Lei | ngth | | 12 | | |

3.11 NEWS

3.11.1 News (22)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Section | OMD Securities | OMD Index |
|---------|----------------|-----------|
| | Standard (SS) | (Index) |
| 3.11.1 | | |

The News message is generated whenever a news update occurs. The message indicates which markets and/or securities the news is applied to. If NoMarketCode and NoSecurityCodes are both set to zero, the news applies to all markets.

The news may be fragmented across multiple consecutive messages. The LastFragment field will be set to 'Y' in the message that contains the last fragment. The "Headline" will only be carried in the first message and blanked from the second message onwards.

| Offset | Field | Format | Len | Description | Values |
|---|-----------------|--------------------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 22 News |
| 4 | NewsType | String | 3 | Type of Exchange news | EXN Exchange news EXC Chinese Exchange news |
| 7 | NewsID | String | 3 | Unique number for the news page within each NewsType | |
| 10 | Headline | String / Binary | 320 | News headline | If NewsType is EXN the Headline is ASCII encoded If NewsType is EXC the Headline is Unicode UTF-16LE encoded |
| 330 | CancelFlag | String | 1 | Indicator of whether previously released exchange news (identified by NewsType and NewsID) has been cancelled | Y Cancelled N Not cancelled |
| 331 | LastFragment | String | 1 | Indicates whether this message is the last in a sequence of messages | Y Complete N Not complete |
| 332 | Filler | String | 4 | | |
| 336 | ReleaseTime | Uint64 | 8 | Release time of the news | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970 ReleaseTime precision is currently provided to the nearest second. |
| 344 | Filler | String | 2 | | |
| 346 | NoMarketCodes | Uint16 | 2 | Number of market codes within this message | 0 to 4 |
| 348 | MarketCode | String | 4 | Market segment identifier | MAIN GEM NASD ETS |
| 348 + 4 _{n_M} | Filler | String | 2 | | |
| 350 + 4 _{nm} | NoSecurityCodes | Uint16 | 2 | Number of security codes within this message | 0 to 200 |
| 352+ 4 _{nм} | SecurityCode | Uint32 | 4 | Uniquely identifies a security available for trading | 5 digit security codes with possible values 1 – 99999 |
| $352 + 4_{n_M} + 4_{n_S}$ | Filler | String | 2 | | |
| 354 + 4 _{n_M} + 4 _{ns} | NoNewsLines | Uint16 | 2 | Number of news lines | Maximum of 10 lines per "news page" is currently supported |

(np = value of NoNewsLines)

| Offset | Field | Format | Len | Description | Values |
|---|----------|---------------------------------|--|-------------|---|
| 356 + 4 _{n_M} + 4 _{n_s} | NewsLine | String / Binary | 160 | News line | If NewsType is EXN the NewsLine is ASCII encoded If NewsType is EXC the NewsLine is Unicode UTF-16LE encoded |
| Total Length | | 356 + 4 n _M ⋅ | + 4 _{ns} + 160 _{np} | | |
| | | | | | $(n_M = value of NoMarketCodes)$ $(n_S = value of NoSecurityCodes)$ |

3.12 INDEX DATA AND MARKET INFORMATION

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [

| Standard (SS) (Index) 3.12 Image: Constraint of the standard st | Section | OMD Securities | OMD Index |
|---|---------|----------------|-----------|
| 3.12 | | Standard (SS) | (Index) |
| | 3.12 | | |

The indices and market information supplied under the OMD Index are described in more detail in Appendix A, as it may be amended from time to time.

3.12.1 Index Definition (70)

The Index Definition message contains the static referential data for the given index and market information and is generated at the start of the business day and may be re-disseminated during the trading hours.

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | МѕдТуре | Uint16 | 2 | Type of message | 70 Index and Market Information Definition |
| 4 | IndexCode | String | 11 | Upstream source's index code or market information identifier | See Index Code in Appendix A for full details. |
| 15 | IndexSource | String | 1 | Index source | CSI or other source of market information HSI S&P TR |
| 16 | CurrencyCode | String | 3 | Currency code of Index Turnover | See Currency Values in section 3.1.2 for full details. |
| 19 | Filler | String | 1 | | |
| Total Lei | ngth | | 20 | | |

3.12.2 Index Data (71)

The Index Data message contains all the real-time data for a given index and real-time market information. Fields within this message may be populated with null values to identify when an update is not provided. See section 3. 1.1 (Null Values) for more information about null values.

| Offset | Field | Format | Len | Description | Values |
|--------|------------------|--------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | МѕдТуре | Uint16 | 2 | Type of message | 71 Index Data and Market Information |
| 4 | IndexCode | String | 11 | Upstream source's index code or market information identifier | See Index Code in Appendix A for full details |
| 15 | IndexStatus | String | 1 | Index status | C Closing value Indicative O Opening index Last close value (prev. ses.) R Preliminary close S Stop loss index T Real-time index value IndexStatus can be blank if not defined by third party index compilers |
| 16 | IndexTime | Int64 | 8 | Publisher timestamp | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970 IndexTime precision is currently provided to the nearest second. |
| 24 | IndexValue | Int64 | 8 | Current value of the index | 4 implied decimal places |
| 32 | NetChgPrevDay | Int64 | 8 | Net change of IndexValue from the previous close, as provided in index source | 4 implied decimal places |
| 40 | HighValue | Int64 | 8 | Highest value for an index | 4 implied decimal places |
| 48 | LowValue | Int64 | 8 | Lowest value for an index | 4 implied decimal places |
| 56 | EASValue | Int64 | 8 | Estimated Average Settlement Value | 2 implied decimal places |
| 64 | IndexTurnover | Int64 | 8 | Current turnover of underlying constituents | 4 implied decimal places |
| 72 | OpeningValue | Int64 | 8 | First value for an index | 4 implied decimal places |
| 80 | ClosingValue | Int64 | 8 | Last value for an index | 4 implied decimal places |
| 88 | PreviousSesClose | Int64 | 8 | Previous session closing value (previous day's closing value for CSI and S&P, previous session's closing value for HSI and TR) | 4 implied decimal places |
| 96 | IndexVolume | Int64 | 8 | Index volume of underlying constituents. Only applicable for CSI | |
| 104 | NetChgPrevDayPct | Int32 | 4 | Percentage change of IndexValue from the previous | 4 implied decimal places |

| Offset | Field | Format | Len | Description | Values |
|----------|-----------|--------|-----|------------------------------------|---|
| | | | | close, as provided in index source | |
| 108 | Exception | String | 1 | Exception indicator | Index with HSIL defined exceptional rule applied ' Normal index (empty string) |
| 109 | Filler | String | 3 | | |
| Total Le | ngth | | 112 | | |

3.13 STOCK CONNECT DATA

| The information supplied in | n this section and its sub-s | ections applies to the Data | afeed(s) marked with [🟉] |
|-----------------------------|------------------------------|-----------------------------|---------------------------|
| Section | OMD Securities | OMD Index | |
| | Standard (SS) | (Index) | |
| 3.13 | | | |

Complimentary service to the Datafeed(s)

3.13.1 Stock Connect Daily Quota Balance (80)

The Stock Connect Daily Quota Balance message provides updates on the Northbound Daily Quota Balance (DQB) for Shanghai-Hong Kong Stock Connect and Shenzhen-Hong Kong Stock Connect separately. Under normal circumstances, the updates are disseminated around every 5 seconds during the trading hours.

| Offset | Field | Format | Len | Description | Values |
|-----------|-----------------------|--------|-----|---|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | МѕдТуре | Uint16 | 2 | Type of message | 80 Stock Connect Daily Quota Balance |
| 4 | StockConnectMarket | String | 2 | Market connected under Stock Connect Program | SHShanghai Stock ExchangeSZShenzhen Stock Exchange |
| 6 | TradingDirection | String | 2 | Trading Direction | NB Northbound trading |
| 8 | DailyQuotaBalance | Int64 | 8 | Northbound Daily Quota Balance (DQB) value for specified Stock Connect Program | DQB in Renminbi (RMB) 0 when the respective DQB is used up |
| 16 | DailyQuotaBalanceTime | Uint64 | 8 | Time of DailyQuotaBalance | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970 DailyQuotaBalanceTime precision is currently provided to the nearest second. |
| Total Lei | ngth | | 24 | | |

3.13.2 Stock Connect Market Turnover (81)

The Stock Connect Market Turnover message provides aggregate turnover under Shanghai-Hong Kong Stock Connect and Shenzhen-Hong Kong Stock Connect ("the Stock Connect programs"). The aggregate turnover is provided for the Northbound trading and the Southbound trading separately under each of the Stock Connect programs. Under normal circumstances, the updates are disseminated around every one minute during the trading hours.

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 81 Stock Connect Market Turnover |
| 4 | StockConnectMarket | String | 2 | Market connected under Stock Connect Program | SHShanghai Stock ExchangeSZShenzhen Stock Exchange |
| 6 | TradingDirection | String | 2 | Trading Direction | NB Northbound trading SB Southbound trading |
| 8 | BuyTurnover | Int64 | 8 | Total turnover of Buy trades from the Northbound or Southbound trading (as specified in TradingDirection) under the Stock Connect Program rounded down to integer | Turnover in RMB for Northbound trading and HKD for Southbound trading |
| 16 | SellTurnover | Int64 | 8 | Total turnover of Sell trades from the Northbound or Southbound trading (as specified in TradingDirection) under the Stock Connect Program rounded down to integer | Turnover in RMB for Northbound trading and HKD for Southbound trading |
| 24 | Buy+SellTurnover | Int64 | 8 | Sum of the values of BuyTurnover and SellTurnover rounded down to integer | Turnover in RMB for Northbound trading and HKD for Southbound trading |
| Total Lei | ngth | | 32 | | |

4. **RECOVERY**

The system provides 2 mechanisms for clients to recover possible data loss from disconnections, namely, Restart and Refresh. On reconnection, clients should always present the InternalSeqNum received in the last message from the server in the InternalSeqNum in the Logon message. The decision to perform a Restart or Refresh, however, is determined by the server and users should use the SessionStatus field within the Logon Response message to determine whether Restart or Refresh is required.

4.1 **Restart**

For short outages where the lost messages are still held in MMDH for Restart recovery, when clients reconnect as above and following successful logon, the system will resume data dissemination from the next message following the message associated with InternalSeqNum supplied in Logon.

However, if the requested message indicated by InternalSeqNum is no longer available in MMDH, MMDH will provide a logon response message with the Session Status value set to '101' (Session Active - Refresh required) and the user should use the Refresh service which is described below.

4.2 **REFRESH SERVICE**

The Refresh service is designed to allow clients to recover from a large scale data loss. This can happen after a late start or during a major outage. Clients should clear all market data received from MMDH for the day from their systems before processing Refresh messages. The refresh service is request based and in order to initiate a refresh the client must send a Refresh Request (1201) message after successful logon – see section 3.5.1 for details. The messages provided and processing of the refresh messages are described below.

Snapshot Processing

See the sequence diagram shown in section 5.3 (Refresh (Data Out Of Range)) to understand the messaging scenario. A Refresh Complete message is sent at the end of a snapshot and following this message the real time data will resume automatically.

Latest Market Snapshot

Data available in the Latest Market Snapshot is described in the table below. During refresh the static data for all markets, securities, liquidity providers and currency rates will be sent first.

| Message | Snapshot description |
|---------------------------------|--|
| Market Definition | Latest market static message for each market. |
| Security Definition | Latest security static message for each security. |
| Liquidity Provider | Latest liquidity provider message for each security. |
| Trading Session Status | Latest trading session status message for each market. |
| Security Status | Security Status message for halted securities and securities resumed trading with status changed to 'resumed' on the current trading day. |
| Add Odd Lot Order | Snapshot for all non-empty books (for odd lot orders). |
| Aggregate Order Book Update | Snapshot for all non-empty books (for board lot orders). Occasionally Aggregated Order Book Update messages will be sent for emptied order books after cancellation or matching of all outstanding orders. In such cases the value of the NoEntries will be "0". |
| Broker Queue | Snapshot for all non-empty books (for board lot orders). Occasionally Broker Queue messages will be sent for emptied broker queues after cancellation or matching of all outstanding orders. In such cases the value of the ItemCount will be "0". |
| Order Imbalance | Latest Order Imbalance message for each CAS applicable security. |
| Closing Price | Closing Price message if available for each security. |
| Indicative Equilibrium Price | Latest Indicative Equilibrium Price message for each security. |
| Nominal Price | Latest nominal price message for each security. |
| Reference Price | Latest Reference Price for each security. |

| Message | Snapshot description |
|--------------------------------------|---|
| VCM Trigger | Latest VCM Trigger message for each VCM applicable security with cooling off period trigged by VCM. |
| Statistics | Latest Statistics message for each security. |
| Market Turnover | Latest Market Turnover message per market / currency pair. |
| Currency Rate | Latest Currency Rate message for each currency. |
| News | All News messages. |
| Index Definition | Latest Index Definition message for each index. |
| Index Data | Latest Index Data message for each index. |
| Yield | Latest Yield message generated for bond securities when their yield percentage last changed. |
| Stock Connect Daily Quota Balance | Latest Stock Connect Daily Quota Balance for each Stock Connect Program. |
| Stock Connect Market Turnover | Latest Stock Connect Market Turnover for each Stock Connect Program and trading direction. |

5. MESSAGE SCENARIOS

There are a number of scenarios described in this section. For each scenario, a pictorial representation of the flow of the messages is provided.

5.1 LOGON (START OF DAY)

When logon is attempted there are a number of responses possible from the MMDH Publisher. The scenario below shows 5 possible responses. In each case the 'SessionStatus' field is used to indicate the result.

See sections 3.4.2 Logon (1101) and 3.4.3 Logon Response (1102) for message fields that are used for this scenario.

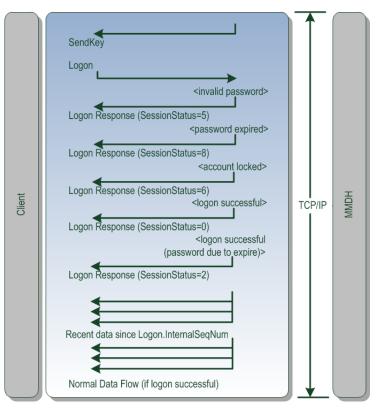


Figure 2 - Logon

5.2 RESTART (DATA IN RANGE)

The server maintains a short history of recent messages which are available for Restart. If the InternalSeqNum provided during Logon is available within this history then the server will simply provide all messages between InternalSeqNum up to the current latest real-time message. Normal data flow continues thereafter.

Typically a restart is possible at the beginning of the day or very soon after a service interruption (where the client is reconnecting).

See sections 3.4.2 Logon (1101) and 3.4.3 Logon Response (1102) for message fields that are used for this scenario

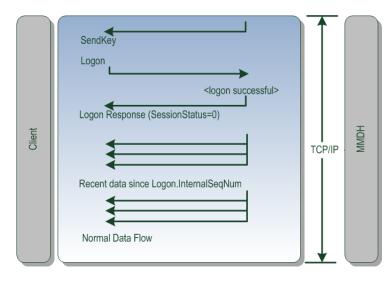


Figure 3 - Restart

5.3 REFRESH (DATA OUT OF RANGE)

The Logon (1101) message includes the 'InternalSeqNum' field. If the sequence number specified is too old then clients will be prompted to request a Refresh (the server only maintains a limited number of recent messages). The need for Refresh is indicated by a Logon Response with Session Status value of 101. On receiving this message clients should clear all cached data for all instruments and then send a Refresh Request (1202) message to the server. The server will respond with the Latest Market Snapshot.

The Latest Market Snapshot contains all messages defined in section 4.2 (Refresh Service). Once all Latest Market Snapshot data is sent the client is up to date and will continue to receive normal data flow as it arrives. Note that messages within the Latest Market Snapshot do not carry any internal sequence number. The new latest internal sequence number will be provided in the Refresh Complete message.

See sections 3.4.2 Logon (1101), 3.4.3 Logon Response (1102), 3.5.1 Refresh Request (1201), 3.5.2 Refresh Response (1202) and 3.5.3 Refresh Complete (203) for message fields that are used for this scenario.

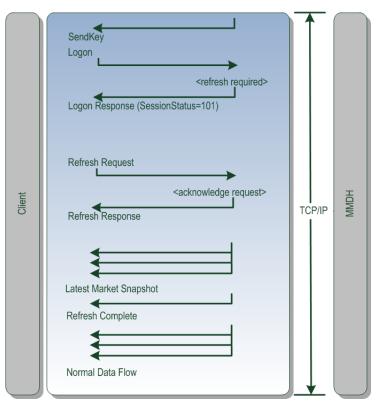


Figure 4 – Restart (Intraday)

5.4 PASSWORD CLOSE TO EXPIRY

When a valid Logon (1101) message is sent but there are only a few days left before expiry of the password, the system will allow the user to logon normally but the Logon Response message will have SessionStatus set to 2 ("Session password due to expire"). Data will continue to flow as normal but the user should change their password as soon as possible – see section 5.5 (Change Password) for details.

See sections 3.4.2 Logon (1101) and 3.4.3 Logon Response (1102) for message fields that are used for this scenario.

| Client | SendKey Logon <logon successful=""> <password due="" expire="" to=""> Logon Response (SessionStatus=2) Recent data since Logon.InternalSeqNum Normal Data Flow</password></logon> | TCP/IP | HOMM |
|--------|---|--------|------|
|--------|---|--------|------|

Figure 5 - Expiry Warning

5.5 CHANGE PASSWORD


A change of password may be attempted by specifying two fields within the Logon (1101) message, these fields are:

- EncryptedNewPasswordLen
- EncryptedNewPassword

Successful password changes will be indicated with a 'SessionStatus' value of 1 in the Logon Response. Other values indicate policy violations. If successful the Client should then send a new Logon (1101) message with the new password value to resume normal data flow.

Another alternative is that the HKEX Operations team have manually changed the password. This temporary password is valid only for the next logon attempt, and the user must change their password at the next logon. If the user doesn't specify new password credentials correctly they will receive a 'Password expired' response, or possibly an 'Against Policy' response if the new password doesn't meet HKEX policy criteria (see section 2.2.1 for policy details). The message flow for changing a password that has been reset by HKEX Operations is identical to the above but the user must use the temporary password during the first Logon (1101) message and at the same time also send values within the EncryptedNewPassword and EncryptedNewPasswordLen fields.

See sections 3.4.2 Logon (1101) and 3.4.3 Logon Response (1102) for message fields that are used for this scenario.

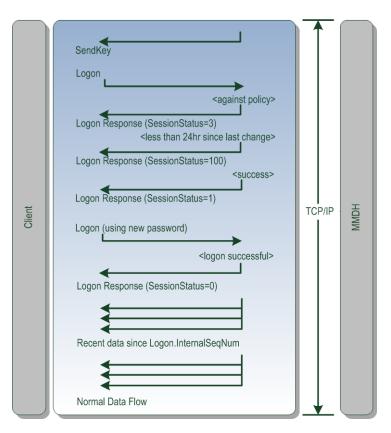



5.6 TWO LOGONS FROM SAME CLIENT

Multiple logons are not permitted. In this scenario a 2^{nd} logon is attempted, which is rejected and additionally the first client is also disconnected. Notice that the TCP/IP session is broken and must be re-established by the client – the server always forces disconnect after sending the Logout(1103) message.

See sections 3.4.2 Logon (1101), 3.4.3 Logon Response (1102) and 3.4.4 Logout (1103) for message fields that are used for this scenario.

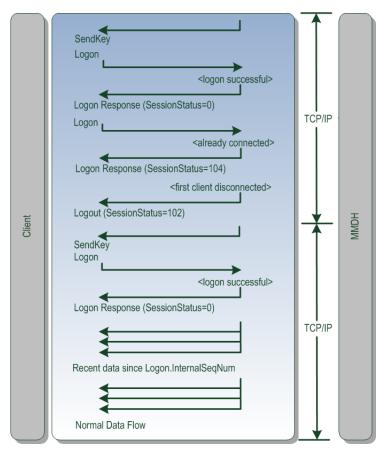


Figure 7 - Dual Logons

5.7 ACCOUNT LOCKED (INTRADAY)

If an account is locked by the MMDH Operations Team, the Client will receive a Logout message.

See section 3.4.4 Logout (1103) for message fields that are used for this scenario.




Figure 8 - Account Locked

6. AGGREGATE ORDER BOOK MANAGEMENT

Book Identification

For each security there exists an odd lot book and a board lot book in the trading system. A book is therefore uniquely identified by SecurityCode.

Partial Price Depth

Securities shall be traded in accordance with the scale of spreads set out in the Second Schedule of the Rules of the Exchange respective to the Spread Table Code specified in their Securities Definition message. The tick level provides information on how many spreads from the best price for an order price whereas a price level is assigned to each price existing in the OMD order book. An order price with tick level 1 means the order price is the best price, a tick level of 2 means the order price is one spread from the best price, etc. The Aggregate Order Book Update message sends out the price level but not the tick level.

The concept of tick and price levels is illustrated in the table below, assuming that the best bid price of a security is 9800 and the spread is 10 for this price range. In the table there are orders in 5 bid prices so the number of price levels is 5 (contiguous price levels from 1 to 5); these orders are distributed over 10 spreads (tick levels) so the tick levels are from 1 to 10. Taking orders with bid price 9710 as example, it is the 5th price in the book so the price level will be 5 and it is 9 spreads from the best bid price so the tick level will be 10.

| | В | id Side | |
|------|------------|-------------------|-------|
| Tick | PriceLevel | AggregateQuantity | Price |
| 1 | 1 | 700 | 9800 |
| 2 | 2 | 350 | 9790 |
| 3 | | | |
| 4 | | | |
| 5 | 3 | 150 | 9760 |
| 6 | | | |
| 7 | | | |
| 8 | | | |
| 9 | 4 | 250 | 9720 |
| 10 | 5 | 100 | 9710 |

OMD provides a view of 10 tick depths of the aggregate order book for securities market and does not provide updates on price levels which are more than 9 spreads away from the best price. This view can be visualized as a number of rows in a table for each of the bid and ask sides. On each side there are a number of rows showing the aggregate quantity available at a number of price levels and tick levels.

| | В | id Side | | Ask Side | | | |
|------|------------|-------------------|-------|----------|-------------------|------------|------|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick |
| 1 | 1 | 700 | 9730 | 9760 | 500 | 1 | 1 |
| 2 | 2 | 350 | 9720 | 9770 | 300 | 2 | 2 |
| 3 | 3 | 150 | 9710 | 9780 | 100 | 3 | 3 |
| 4 | 4 | 250 | 9700 | 9790 | 150 | 4 | 4 |
| 5 | 5 | 100 | 9690 | | | | 5 |
| 6 | 6 | 150 | 9680 | | | | 6 |
| 7 | 7 | 50 | 9670 | | | | 7 |
| 8 | 8 | 200 | 9660 | | | | 8 |
| 9 | 9 | 100 | 9650 | | | | 9 |
| 10 | | | | | | | 10 |

OMD only sends updates within the 10 tick levels in the aggregate order book except for Explicit Deletion (please refer Example 5 illustrated below for details)

Book Updates

Book update messages are generated by OMD as delta messages defined in section 3.8.3 (Aggregate Order Book Update (53)). Each message may contain any combination of new, changed or deleted entries for a book. The nature of an entry is defined by its UpdateAction.

New, to create/insert a new price level Delete, to remove a price level Change, to update aggregate quantity at a price level Orderbook Clear, to inform users that all price levels should be cleared

Example 1 – Quantity Reduction and Explicit Addition

For example suppose the Ask order at price level 9770 is reduced in quantity and at the same time a new order is added at price level 9850, then the following message is sent;

| Offset | Field Name | Value |
|--------|-------------------|-----------|
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 200 |
| 20 | Price | 9770 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 1 (Offer) |
| 30 | PriceLevel | 2 |
| 31 | UpdateAction | 1 |
| 32 | Filler | NULL |
| 36 | AggregateQuantity | 300 |
| 44 | Price | 9850 |
| 48 | NumberOfOrders | 1 |
| 52 | Side | 1 (Offer) |
| 54 | PriceLevel | 5 |
| 55 | UpdateAction | 0 |
| 56 | Filler | NULL |

The resulting book should now be as follows:

| Bid Side | | | | | Ask Side | | | | |
|----------|------------|-------------------|-------|-------|-------------------|------------|------|--|--|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick | | |
| 1 | 1 | 700 | 9730 | 9760 | 500 | 1 | 1 | | |
| 2 | 2 | 350 | 9720 | 9770 | 200 | 2 | 2 | | |
| 3 | 3 | 150 | 9710 | 9780 | 100 | 3 | 3 | | |
| 4 | 4 | 250 | 9700 | 9790 | 150 | 4 | 4 | | |
| 5 | 5 | 100 | 9690 | | | | 5 | | |
| 6 | 6 | 150 | 9680 | | | | 6 | | |
| 7 | 7 | 50 | 9670 | | | | 7 | | |
| 8 | 8 | 200 | 9660 | | | | 8 | | |
| 9 | 9 | 100 | 9650 | | | | 9 | | |
| 10 | | | | 9850 | 300 | 5 | 10 | | |

Example 2 – Implicit Level Adjustments

The client must adjust the price level of entries below deleted or inserted entries. Potential level adjustments must be carried out after each single entry in Aggregate Order Book message.

For example, if a bid order with price 9740 and quantity 50 is added to the order book above, it will cause the following message to be sent:

| Offset | Field Name | Value |
|--------|-------------------|---------|
| 0 | MsgSize | 36 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 1 |
| 12 | AggregateQuantity | 50 |
| 20 | Price | 9740 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |
| 31 | UpdateAction | 0 |
| 32 | Filler | NULL |

After processing this message, the client's book should look as follows:

| Bid Side | | | | | Ask Side | | | |
|----------|------------|-------------------|-------|-------|-------------------|------------|------|--|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick | |
| 1 | 1 | 50 | 9740 | 9760 | 500 | 1 | 1 | |
| 2 | 2 | 700 | 9730 | 9770 | 200 | 2 | 2 | |
| 3 | 3 | 350 | 9720 | 9780 | 100 | 3 | 3 | |
| 4 | 4 | 150 | 9710 | 9790 | 150 | 4 | 4 | |
| 5 | 5 | 250 | 9700 | | | | 5 | |
| 6 | 6 | 100 | 9690 | | | | 6 | |
| 7 | 7 | 150 | 9680 | | | | 7 | |
| 8 | 8 | 50 | 9670 | | | | 8 | |
| 9 | 9 | 200 | 9660 | | | | 9 | |
| 10 | 10 | 100 | 9650 | 9850 | 300 | 5 | 10 | |

Price levels of the other 9 Bid orders must all be incremented although there will not be Aggregate Order Book Update messages sent for the increment.

Example 3 – Implicit Deletions

If a new book entry causes the bottom entry of a book to be shifted out of the book (i.e. more than 9 spreads away from the best price), the client must delete the excess entry. If the book shrinks again, the server resends the entries that have temporarily fallen out.

For example, if a bid order with price 9750 and quantity 250 is added to the book above, and the bid quantity at price 9660 is reduced from 200 to 150, it will cause the following message to be sent:

| Offset | Field Name | Value |
|--------|------------|-------|
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |

| 4 | SecurityCode | 1234 |
|----|-------------------|---------|
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 250 |
| 20 | Price | 9750 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |
| 31 | UpdateAction | 0 |
| 32 | Filler | NULL |
| 36 | AggregateQuantity | 150 |
| 44 | Price | 9660 |
| 48 | NumberOfOrders | 1 |
| 52 | Side | 0 (Bid) |
| 54 | PriceLevel | 10 |
| 55 | UpdateAction | 1 |
| 56 | Filler | NULL |
| | | |

After processing this message, the client's book should look as follows:

| Bid Side | | | | Ask Side | | | | |
|----------|------------|-------------------|-------|----------|-------------------|------------|------|--|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick | |
| 1 | 1 | 250 | 9750 | 9760 | 500 | 1 | 1 | |
| 2 | 2 | 50 | 9740 | 9770 | 200 | 2 | 2 | |
| 3 | 3 | 700 | 9730 | 9780 | 100 | 3 | 3 | |
| 4 | 4 | 350 | 9720 | 9790 | 150 | 4 | 4 | |
| 5 | 5 | 150 | 9710 | | | | 5 | |
| 6 | 6 | 250 | 9700 | | | | 6 | |
| 7 | 7 | 100 | 9690 | | | | 7 | |
| 8 | 8 | 150 | 9680 | | | | 8 | |
| 9 | 9 | 50 | 9670 | | | | 9 | |
| 10 | 10 | 150 | 9660 | 9850 | 300 | 5 | 10 | |

Price 9750 and quantity 250 is added according to the message.

Price 9650 and quantity 100 must be deleted by the client.

Price 9660 quantity must be reduced to 150 – PriceLevel 10 is used in the incoming message to reflect the new price level of the price 9660 after the addition of the price 9750.

Example 4 – Explicit Additions

If a match causes an order to be removed so that there are now less than 10 levels visible then the server will also automatically send the additional level(s) that are now revealed.

For example, if the bid order with price 9750 and quantity 250 is now removed from the book above and this reveals an 11th level which needs to be disseminated then it will cause the following message to be sent:

| Offset | Field Name | Value |
|--------|--------------|-------|
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |

| 11 | NoEntries | 2 | |
|----|-------------------|---------|--|
| 12 | AggregateQuantity | 250 | |
| 20 | Price | 9750 | |
| 24 | NumberOfOrders | 1 | |
| 28 | Side | 0 (Bid) | |
| 30 | PriceLevel | 1 | |
| 31 | UpdateAction | 2 | |
| 32 | Filler | NULL | |
| 36 | AggregateQuantity | 100 | |
| 44 | Price | 9650 | |
| 48 | NumberOfOrders | 1 | |
| 52 | Side | 0 (Bid) | |
| 54 | PriceLevel | 10 | |
| 55 | UpdateAction | 0 | |
| 56 | Filler | NULL | |

The resulting order book should now be;

| Bid Side | | | | Ask Side | | | |
|----------|------------|-------------------|-------|----------|-------------------|------------|------|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick |
| 1 | 1 | 50 | 9740 | 9760 | 500 | 1 | 1 |
| 2 | 2 | 700 | 9730 | 9770 | 200 | 2 | 2 |
| 3 | 3 | 350 | 9720 | 9780 | 100 | 3 | 3 |
| 4 | 4 | 150 | 9710 | 9790 | 150 | 4 | 4 |
| 5 | 5 | 250 | 9700 | | | | 5 |
| 6 | 6 | 100 | 9690 | | | | 6 |
| 7 | 7 | 150 | 9680 | | | | 7 |
| 8 | 8 | 50 | 9670 | | | | 8 |
| 9 | 9 | 200 | 9660 | | | | 9 |
| 10 | 10 | 100 | 9650 | 9850 | 300 | 5 | 10 |

Example 5 – Explicit Deletions

Suppose a new book entry causes the last tick entry (Tick 10 in the previous order book in Example 4) to be shifted out of the book, if the shifted out entry is within 10 price level, OMD will send an explicit deletion for the entry. If the shifted out entry is outside the 10 price level, OMD will not send further updates on that price and the client must delete the excess entry (please refer to Example 3 above for details) to ensure their order book will not keep out-dated information.

For example, if an ask order with price 9750 and quantity 300 is added to the order book above, it will cause the following message to be sent:

| Offset | Field Name | Value |
|--------|-------------------|-----------|
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 300 |
| 20 | Price | 9750 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 1 (Offer) |

| 30 | PriceLevel | 1 |
|----|-------------------|-----------|
| 31 | UpdateAction | 0 |
| 32 | Filler | NULL |
| 36 | AggregateQuantity | 300 |
| 44 | Price | 9850 |
| 48 | NumberOfOrders | 1 |
| 52 | Side | 1 (Offer) |
| 54 | PriceLevel | 6 |
| 55 | UpdateAction | 2 |
| 56 | Filler | NULL |

The resulting order book should now be;

| Bid Side | | | | Ask Side | | | | |
|----------|------------|-------------------|-------|----------|-------------------|------------|------|--|
| Tick | PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | Tick | |
| 1 | 1 | 50 | 9740 | 9750 | 300 | 1 | 1 | |
| 2 | 2 | 700 | 9730 | 9760 | 500 | 2 | 2 | |
| 3 | 3 | 350 | 9720 | 9770 | 200 | 3 | 3 | |
| 4 | 4 | 150 | 9710 | 9780 | 100 | 4 | 4 | |
| 5 | 5 | 250 | 9700 | 9790 | 150 | 5 | 5 | |
| 6 | 6 | 100 | 9690 | | | | 6 | |
| 7 | 7 | 150 | 9680 | | | | 7 | |
| 8 | 8 | 50 | 9670 | | | | 8 | |
| 9 | 9 | 200 | 9660 | | | | 9 | |
| 10 | 10 | 100 | 9650 | | | | 10 | |

Explicit Deletions versus Implicit Deletions

Suppose initially bid orders are queued in 8 price levels in the aggregate order book and assume there is no order inputted at price 9770 & 9740. The aggregate order book will be as follows.

| | В | id Side | |
|------|------------|-------------------|-------|
| Tick | PriceLevel | AggregateQuantity | Price |
| 1 | 1 | 700 | 9800 |
| 2 | 2 | 350 | 9790 |
| 3 | 3 | 150 | 9780 |
| 4 | | | |
| 5 | 4 | 250 | 9760 |
| 6 | 5 | 100 | 9750 |
| 7 | | | |
| 8 | 6 | 400 | 9730 |
| 9 | 7 | 200 | 9720 |
| 10 | 8 | 300 | 9710 |

When new bid orders at 3 different prices (9860, 9850 & 9840) arrived, the resulting book will be changed as follows:

| | В | id Side | | |
|------|------------|-------------------|-------|--------------------------------|
| Tick | PriceLevel | AggregateQuantity | Price | |
| 1 | 1 | 450 | 9860 | ← new order, Explicit Addition |
| 2 | 2 | 550 | 9850 | ← new order, Explicit Addition |
| 3 | 3 | 650 | 9840 | ← new order, Explicit Addition |

| 4 | | | |] |
|----|----|-----|------|---|
| 5 | | | | |
| 6 | | | | |
| 7 | 4 | 700 | 9800 | ← previous best bid, now at PriceLevel 4 (Tick 7), Implicit Level Adjustment |
| 8 | 5 | 350 | 9790 | ← previous 2 nd best bid, now at PriceLevel 5 (Tick 8), Implicit Level Adjustment |
| 9 | 6 | 150 | 9780 | ← previous 3 rd best bid, now at PriceLevel 6 (Tick 9), Implcit Level Adjustmen |
| 10 | | | | |
| 11 | 7 | 250 | 9760 | ← orders exceed 10 Tick but within 10 PriceLevel, Explicit Deletion |
| 12 | 8 | 100 | 9750 | ← orders exceed 10 Tick but within 10 PriceLevel, Explicit Deletion |
| 13 | | | | |
| 14 | 9 | 400 | 9730 | ← orders exceed 10 Tick but within 10 PriceLevel, Explicit Deletion |
| 15 | 10 | 200 | 9720 | ← orders exceed 10 Tick but within 10 PriceLevel, Explicit Deletion |
| 16 | 11 | 300 | 9710 | ← orders exceed 10 Tick & exceed 10 PriceLevel, Implicit Deletion |

Orders in shaded area which were originally within the 10 tick levels offered in OMD now fall outside the 10 tick levels. OMD will send Explicit Delete for orders which fall outside 10 tick levels but are within 10 price levels (i.e. entries highlighted in blue). However OMD will not send Explicit Delete for orders which are outside 10 price levels (i.e. entries highlighted in pink) and the client must delete the excess entries (i.e. Implicit Delete by the client).

| wing messa | ge will be sent: | |
|------------|-------------------|---------|
| Offset | Field Name | Value |
| 0 | MsgSize | 180 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 7 |
| 12 | AggregateQuantity | 450 |
| 20 | Price | 9860 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |
| 31 | UpdateAction | 0 |
| 32 | Filler | NULL |
| 36 | AggregateQuantity | 550 |
| 44 | Price | 9850 |
| 48 | NumberOfOrders | 1 |
| 52 | Side | 0 (Bid) |
| 54 | PriceLevel | 2 |
| 55 | UpdateAction | 0 |
| 56 | Filler | NULL |
| 60 | AggregateQuantity | 650 |
| 68 | Price | 9840 |
| 72 | NumberOfOrders | 1 |
| 76 | Side | 0 (Bid) |
| 78 | PriceLevel | 3 |
| 79 | UpdateAction | 0 |
| 80 | Filler | NULL |
| 84 | AggregateQuantity | 250 |
| 92 | Price | 9760 |
| 96 | NumberOfOrders | 1 |
| 100 | Side | 0 (Bid) |

The following message will be sent:

| 102 | PriceLevel | 7 | |
|---------|-------------------|---------|--|
| 103 | UpdateAction | 2 | |
| 104 | Filler | NULL | |
| 108 | AggregateQuantity | 100 | |
| 116 | Price | 9750 | |
| 120 | NumberOfOrders | 1 | |
| 124 | Side | 0 (Bid) | |
| 126 | PriceLevel | 7 | |
| 127 | UpdateAction | 2 | |
| 128 | Filler | NULL | |
| 132 | AggregateQuantity | 400 | |
| 140 | Price | 9730 | |
| 144 | NumberOfOrders | 1 | |
| 148 | Side | 0 (Bid) | |
| 150 | PriceLevel | 7 | |
| 151 | UpdateAction | 2 | |
| 152 | Filler | NULL | |
| 156 | AggregateQuantity | 200 | |
| 164 | Price | 9720 | |
| 168 | NumberOfOrders | 1 | |
| 172 | Side | 0 (Bid) | |
| 174 | PriceLevel | 7 | |
| 175 | UpdateAction | 2 | |
| 176 | Filler | NULL | |
| | | | |

Example 6 – Orderbook Clear

In certain failure scenarios the system may send an 'Orderbook Clear' message at which point clients should clear both Bid and Ask side orderbooks for the specified security. An example message is shown below. Following an 'Orderbook Clear' message any existing orders for the security will be resent as normal to rebuild the current image.

| Offset | Field Name | Value |
|--------|-------------------|-------|
| 0 | MsgSize | 36 |
| 2 | MsgType | 53 |
| 4 | SecurityCode | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 1 |
| 12 | AggregateQuantity | 0 |
| 20 | Price | 0 |
| 24 | NumberOfOrders | 0 |
| 28 | Side | 0 |
| 30 | PriceLevel | 0 |
| 31 | UpdateAction | 74 |
| 32 | Filler | NULL |

7. MISSING INDEX REPORT

In a situation that some index data are not published due to OMD Index Feed issue, a missing index report would be delivered to subscribers by email at the end of business day. Report would not be provided in case of the failure from index compliers.

The missing index report contains the missed index data updated from the index source during the interuption as indicated in the report file name. The report is in CSV format and sample file could be downloaded via this link.

Record Fields

| Field | Description | Values |
|------------------|---|---|
| IndexCode | Upstream source's index code or market information identifier | See Index Code in Appendix A for full details |
| IndexStatus | Index status | C Closing value Indicative Opening index Last close value (prev. ses.) P reliminary close S Stop loss index T Real-time index value IndexStatus can be blank if not defined by third party index compilers |
| IndexTime | Publisher timestamp | The number of nanoseconds elapsed since midnight Coordinated Universal Time (UTC) of January 1, 1970 IndexTime precision is currently provided to the nearest second. |
| IndexValue | Current value of the index | 4 implied decimal places |
| NetChgPrevDay | Net change of IndexValue from the previous close, as provided in index source | 4 implied decimal places |
| HighValue | Highest value for an index | 4 implied decimal places |
| LowValue | Lowest value for an index | 4 implied decimal places |
| EASValue | Estimated Average Settlement Value | 2 implied decimal places |
| IndexTurnover | Current turnover of underlying constituents | 4 implied decimal places |
| OpeningValue | First value for an index | 4 implied decimal places |
| ClosingValue | Last value for an index | 4 implied decimal places |
| PreviousSesClose | Previous session closing value (previous day's closing value for CSI, CES and S&P, previous session's closing value for HSI and TR) | 4 implied decimal places |
| IndexVolume | Index volume of underlying constituents. Only applicable for CSI and CES | |
| NetChgPrevDayPct | Percentage change of IndexValue from the previous close, as provided in index source | 4 implied decimal places |
| Exception | Exception indicator | # Index with HSIL defined exceptional rule applied' Normal index (empty string) |

APPENDIX A - LIST OF INDICES AND MARKET INFORMATION UNDER OMD INDEX

The information supplied in this appendix applies to OMD Index only.

The indices supplied under the OMD Index are described in the table below, as it may be amended from time to time by HKEX-IS pursuant to clause 2.2 of the Licence Agreement. The mark [•] specifies if an index disseminated under the OMD Index is Third Party Content under the Licence Agreement. Licensee shall refer to clause 10.6 of the Market Data Vendor Licence Agreement and notices issued by HKEX-IS from time to time for redistribution of Third Party Content.

| Index Source | Index Code | Name of the Index and market information disseminated under the OMD Index | Third Party Content under the Licence Agreement | Third Party Index Ownership |
|-----------------|------------|---|--|--------------------------------------|
| С | CES120 | CES China 120 Index | • | CES |
| С | CESA80 | CES China A80 Index | • | CES |
| С | CESHKM | CES China HK Mainland Index | • | CES |
| С | CES280 | CES China 280 Index | • | CES |
| С | CESG10 | CES Gaming Top 10 Index | • | CES |
| С | CES300 | CES Stock Connect 300 Index | • | CES |
| С | CES100 | CES Stock Connect Hong Kong Select 100 Index | • | CES |
| С | CESHKB | CES HK Biotechnology Index | • | CES |
| С | CESP50 | CES Stock Connect Hong Kong Premier 50 Index | • | CES |
| С | 990001 | CES China Semiconductor Chips Index | ٠ | CES |
| С | CSI300 | CSI 300 Index | • | CSI |
| С | 000942 | CSI China Mainland Consumer Index | ٠ | CSI |
| С | H11123 | CSI HK Mainland Enterprises 50 Index | ٠ | CSI |
| С | H11100 | CSI Hong Kong 100 Index | ٠ | CSI |
| С | H11140 | CSI Hong Kong Dividend Index | ٠ | CSI |
| С | H11144 | CSI Hong Kong Listed Tradable Mainland Consumption Index | ۲ | CSI |
| С | H11143 | CSI Hong Kong Listed Tradable Mainland Real Estate Index | ٠ | CSI |
| С | H11120 | CSI Hong Kong Middle Cap Select Index | ٠ | CSI |
| С | H11152 | CSI Hong Kong Private-owned Mainland Enterprises Index | ٠ | CSI |
| С | H11153 | CSI Hong Kong State-owned Mainland Enterprises Index | • | CSI |
| С | H11110 | CSI RAFI Hong Kong 50 Index | ٠ | CSI |
| С | 000016 | SSE 50 Index | • | SSE |
| С | 000021 | SSE 180 Governance Index | ٠ | SSE |
| С | 000010 | SSE 180 Index | • | SSE |
| С | 000009 | SSE 380 Index | • | SSE |
| С | 000066 | SSE Commodity Equity Index | ۲ | SSE |
| С | 000001 | SSE Composite Index | ٠ | SSE |
| С | 000015 | SSE Dividend Index | • | SSE |
| С | 000043 | SSE Mega-cap Index | • | SSE |
| С | 000044 | SSE Mid Cap Index | ۲ | SSE |
| С | 000065 | SSE Industry Top Index | ٠ | SSE |
| Н | 0001500 | Hang Seng China Affiliated Corporations Index | ٠ | HSDS |
| Н | 0001400 | Hang Seng China Enterprises Index | | HSDS |

The Index Source and Index Code in the table below include the source and code for market information.

| Η | 0000100 | Hang Seng Index | | HSDS |
|---|---------|--|---|------|
| Н | 0000101 | HSI Sub Indices – Finance | • | HSDS |
| Н | 0000102 | HSI Sub Indices – Utilities | • | HSDS |
| Н | 0000103 | HSI Sub Indices – Property | • | HSDS |
| Н | 0000104 | HSI Sub Indices – Commerce & Industry | | HSDS |
| Н | 0105000 | HSI Volatility Index (VHSI) | • | HSDS |
| Н | 0200700 | Hang Seng Mainland Banks Index | | HSDS |
| Н | 0200800 | Hang Seng Mainland Properties Index | • | HSDS |
| Н | 0201000 | Hang Seng Mainland Oil and Gas Index | | HSDS |
| Н | 0205000 | HSI ESG Index | • | HSDS |
| Н | 0205100 | HSCEI ESG Index | ٠ | HSDS |
| Н | 0208300 | Hang Seng TECH Index | | HSDS |
| Н | 1006800 | Hang Seng Index (Gross Total Return Index) | ٠ | HSDS |
| Н | 1006801 | Hang Seng Finance Sub-Index (Gross Total Return Index) | | HSDS |
| Н | 1006802 | Hang Seng Utilities Sub-Index (Gross Total Return Index) | • | HSDS |
| Н | 1006803 | Hang Seng Properties Sub-Index (Gross Total Return Index) | | HSDS |
| Н | 1006804 | Hang Seng Index Commerce & Industry Sub-Index (Gross Total Return Index) | | HSDS |
| Н | 1007200 | Hang Seng China Enterprises Index (Gross Total Return Index) | | HSDS |
| Н | 2006800 | Hang Seng Index (Net Total Return Index) | | HSDS |
| Н | 2006801 | Hang Seng Finance Sub-Index (Net Total Return Index) | | HSDS |
| Н | 2006802 | Hang Seng Utilities Sub-Index (Net Total Return Index) | | HSDS |
| Н | 2006803 | Hang Seng Properties Sub-Index (Net Total Return Index) | | HSDS |
| Н | 2006804 | Hang Seng Index Commerce & Industry Sub-Index (Net Total Return Index) | • | HSDS |
| Н | 2007200 | Hang Seng China Enterprises Index (Net Total Return Index) | | HSDS |
| S | SPHKG | S&P/HKEX GEM Index | | N/A |
| S | SPHKL | S&P/HKEX LargeCap Index | | N/A |
| Т | RXYH | TR/HKEX RXY Global CNH | | TR |
| Т | RXYY | TR/HKEX RXY Global CNY | | TR |
| Т | RXYRH | TR/HKEX RXY Reference CNH | ٠ | TR |
| Т | RXYRY | TR/HKEX RXY Reference CNY | | TR |
| Т | HKGDUER | HKEX USD Gold Futures – Excess Return Index | | N/A |
| Т | HKGDUTR | HKEX USD Gold Futures – Total Return Index | | N/A |
| Т | HKGDUSP | HKEX USD Gold Futures – Spot Price Index | | N/A |
| Т | HKGDRER | HKEX CNH Gold Futures – Excess Return Index | | N/A |
| Т | HKGDRTR | HKEX CNH Gold Futures – Total Return Index | | N/A |
| Т | HKGDRSP | HKEX CNH Gold Futures – Spot Price Index | | N/A |

Note 1: For indices with the index source = C, in the event there is service outage in the HKEX primary data center and restart of OMD-C at the secondary data center, real-time dissemination of CSI and CES index data will be suspended until service resumption of the HKEX primary data center.

| Abbreviation: | | |
|---------------|---|--|
| CES | = | China Exchanges Services Company Limited |
| CSI | = | China Securities Index Company Limited |
| HSDS | = | Hang Seng Data Services Limited |
| HSI | = | Hang Seng Indexes Company Limited |
| S&P | = | S&P Dow Jones Indices |
| TR | = | Thomson Reuters Hong Kong Limited |
| | | |

APPENDIX B – REFERENCE PRICE, PRICE BAND FOR ORDER INPUT, INDICATIVE EQUILIBRIUM PRICE AND ORDER IMBALANCE DURING PRE-OPENING SESSION

Below chart illustrates messages related to trading session, reference price, price limits, IEP and order imbalance in the pre-opening session. There will be other messages (e.g., order book data, status data, news, etc) to be disseminated in the pre-opening session based on the events.

| Timeline | - | C Start n = Not Yet Open | - | J Session change to Order Input | • | ession change to Cancellation | | ession change to om Matching | Trading Session of Order Match | - | Trading Session Blocking | • |
|------------|----------------------|--|---------------------|------------------------------------|---------------------|--|---------------------|---------------------------------|--------------------------------|-------------|-----------------------------|----------------|
| Message | Trading Sess | ion Status (20) | Tradino | Session Status (20) | Trading S | ession Status (20) | Trading Se | ession Status (20) | Trading Session S | Status (20) | Trading Session | Status (20) |
| Key field | TradingSessionSubID | 100 (Not Yet Open) | TradingSessionSubID | 1 (OI) | TradingSessionSubID | 101 (NW) | TradingSessionSubID | 108 (RM) | TradingSessionSubID | 2 (MA) | TradingSessionSubID | 7 (BL) |
| Message | Security De | efiniton (11) | | | Refere | ence Price (43) | | | | | Reference Pri | ce (43) |
| Key fields | POSElan | "Y" / "N" for POS applicable or not | | | Reference price | Reference price of all orders in POS period | | | | | Reference price | 0, reset value |
| | ProvinusClosinaPrico | Reference price of all orders in POS period | - | | UpperLimit | Upper price limit of at-auction Limit buy order in POS No Cancellation and Random Matching periods | | | | | UpperLimit | 0, reset value |
| | POSUpperLimit | Upper price limit of all orders in POS Order Input period, and At- auction Limit sell order in POS No Cancellation and Random Matching | | | LowerLimit | Lower price limit of at-auction Limit sell order in POS No Cancellation and Random Matching periods | | | | | LowerLimit | 0, reset value |
| | | periods Lower price limit of all orders in POS Order Input period, and At- auction Limit buy order | | | | 1 | - | | | | | 1 |

| Message | | Order Imbalance (56) | | Order Imbalance (56) | | Order Imbalance (56) | | Order Imbalance (56) | |
|-----------|-------------------------|--|---|---|---|--|---|----------------------------------|----------------|
| | OrderImbalanceDirectior | Imbalance direction when the matchable buy quantity and sell quantity at IEP are not equal | | matchable buy quantity and sell quantity at IEP are not equal | OrderImbalanceDirection | Imbalance direction when the matchable buy quantity and sell quantity at IEP are not equal | OrderImbalanceDirection | <space>, reset value</space> | |
| itey nero | | OrderlmbalanceQuantity | Absolute difference between the matchable buy quantity and the sell quantity at IEP | OrderImbalanceQuantity | Absolute difference between the matchable buy quantity and the sell quantity at IEP | OrderImbalanceQuantity | Absolute difference between the matchable buy quantity and the sell quantity at IEP | OrderlmbalanceQuantity | 0, reset value |

ndicative Equilibrium Price

Indicative Equilibrium Volume

Price

AggregateQuantity

Indicative Equilibrium Price (41)

Price

AggregateQuantity

Indicative Equilibrium Price (41)

Indicative Equilibrium Price

Indicative Equilibrium Volume

Indicative Equilibrium Price (41)

, reset value

), reset value

Price

AggregateQuantity

Message

Key fields

in POS No Cancellation and Random Matching

Price

AggregateQuantity

Indicative Equilibrium Price (41)

ndicative Equilibrium Price

ndicative Equilibrium Volume