

INTERFACE SPECIFICATIONS

HKEX Orion Market Data Platform

Derivatives Market Datafeed Products (OMD-D)

Binary Protocol

Version 1.33 12 June 2020

© Copyright 2020 HKEX All Rights Reserved

DOCUMENT HISTORY

| Version | Date | Changes |
|---------|-------------|--|
| 1.0 | 31 Jan 2013 | First Distribution Issue |
| 1.1 | 21 Jun 2013 | Revised Edition with the following updates: Section 2.2.1 - Refresh mentioned as "likely" Section 2.2.1 - System brought up time mentioned as "at around 5:00am" Section 2.2.3 - Typo MsgType 320 instead of 20. Section 3.1 - String fields padded with spaces Section 3.1 - Binary fields padded with binary null Section 3.2 - Packet Structure note added regarding max packet length Section 3.4.2 - Action on sequence reset clarified Section 3.7.2 - Retransmission header detail added Section 3.7.2 - Key to Class Definition clarified and links to values (at end of document) added Section 3.7.3 - Price decimals field clarified Section 3.7.4 - Links to values (at end of document) added Section 3.7.5 - Combination Definition typo Section 3.8.1 - CommodityCode changed from Uint32 to 16 and a 2-byte filler added Section 3.8.1 - Links to values (at end of document) added, typo offset corrected and reference to Developer's Guide added Sections 3.8.2 & 3.8.3 - Suspended field Sections 3.9.1, 3.9.2, 3.9.3 - OrderID typos Sections 3.9.1 - Clarification regarding order rank Sections 3.9.1 - Quantity field description improved Section 3.9.5 - Orderbook Clear usage clarified Section 3.10.1 - Notes for important messages added Section 3.10.1 - Trade offsets adjusted and OrderID field type changed Section 3.10.1 - Rogregate Order Book Update typo Section 3.10.3 - High/low text improved and DealCount field length correction Section 3.10.4 - High/low text improved and DealCount field length correction Section 3.10.4 - High/low text improved Section 3.10.1 - Mores for lend "Turnover" typo Section 3.10.1 - Mores for lend "Turnover" typo Section 3.10.1 - Mores for lend to handle multiple fragments in the event of large messages Section 3.11.1 - Multi fragment market alerts detail and Binary format for Header/Content fields Section 3.11.1 - Mores for lend did for tables) |
| 1.2 | 2 Aug 2013 | Revised Edition with the following updates: Section 3.1.1 – Null values updated Section 3.5.2 – SessionStatus 5 wording updated Section 3.9.3 – Clarification about identifying which order to delete Section 3.9.4 – Note added about market orders representation Section 3.10.3 – Clarifications about which trades are included in high/low prices Section 3.10.6 – EAS Null note added Section 4.3 – Message history wording adjusted Section 4.3 – Table for system limits updated Section 4.4 – Trade removed from Refresh table Section 6 – Examples added for Market Order, COP Merge and Orderbook Clear handling Section 7 – Notes added for Market Order, COP new requirements |

© Copyright 2020 HKEX 2/67

| 1.3 | 2 Jan 2014 | Revised Edition with the following updates: Section 3.7.4: Default values added for 5 fields within Series Definition Extended (304) Section 3.8.1: Default values added for 7 fields within Market Status (320) Section 3.10.1: Format for Price field clarified. Default value added for OrderlD field and decimal precision detail added Section 3.10.2: Note added regarding Trade Amendment (356) for combos and decimal precision detail added Section 3.10.3: Trade Statistics (360) decimal precision detail added Section 3.10.4: Series Statistics (363) decimal precision detail added Section 3.10.5: Calculated Opening Price (364) decimal precision detail added Section 3.11.1: Prefix [C] added for Chinese Market Alert. Section 3.11.1: "Source" field added to market alert message and notes added to the first paragraph Section 3.12.1: Open Interest (366) DayIndicator typo corrected and decimal precision detail added Section 3.12.2: Implied Volatility (367) – decimal precision detail added Section 8.4: "Market Type" column added to markets listing Section 8.5: Table of settlement price details added Section 8.6: Table of Index Provider' Index Code for Index EAS added |
|-----|-------------|---|
| 1.4 | 4 Apr 2014 | Revised Edition with the following updates: Section 3.2 – Typo corrected for Market Alert Section 3.7.1 – Values updated for Nominal Value, UnderlyingPriceUnit and UnderlyingType Section 3.7.2 – Values updated for Modifier, PriceQuotationFactor, ContractSize, RankingType and PremiumUnit4Price. Footnotes for unused field values added Section 3.7.3 – Values updated for StrikePrice and FinancialProduct. Footnotes for unused field values added Section 3.7.4 – Values updated for Modifier, StrikePrice, ContractSize and SeriesStatus. Footnotes for unused field values added Section 3.8.1 – Values updated for StateLevel Section 3.9.1 – Values updated for StateLevel Section 3.9.2 – Values updated for Price, LotType and OrderType. Footnotes for unused field values added Section 3.9.2 – Notes added for Modify Order message Section 3.9.4 – Values updated for Price Section 3.9.4 – Values updated for Price, TradeCondition and DealInfo. Footnotes for unused field values added Section 3.10.1 – Clarification added for important message Section 3.10.3 – Values updated for DealSource Section 3.10.5 – Values updated for CalculatedOpeningPrice Section 3.12.1 – Values updated for SettlementPrice Section 4.4 – Notes added for real time multicast channel with refresh channel Section 6 – Clarification about Book Updates Section 8.4 – Market ID table updated |
| 1.5 | 2 May 2014 | Revised Edition with the following updates: - Section 3.1 – Clarification added for String - Section 3.5.1 – Clarification added for null value - Section 3.5.1 – Clarification added for Username - Section 3.7.2 – Clarification added for Modifier - Section 3.7.3 – Values updated for Strike Price - Section 3.7.3 – DecimalsInStrikePrice changed to Filler and description removed - Section 3.7.4 – Clarification added for Modifier - Section 3.7.4 – Values updated for Side |
| 1.6 | 30 May 2014 | Revised Edition with the following updates: - Section 3.1.4 – Updated bitmap values example - Section 3.10.1 – Note added after table |

© Copyright 2020 HKEX 3/67

| 1.7 | 27 Oct 2014 | Revised Edition with the following updates: - Sections 2.2.1, 3.10.1, 3.10.2 & 8.3 – Aligned the term "combination series" with "Combo Series" - Section 3.1.1 – Clarification added for null value - Section 3.7.3 & 3.7.4 – Updated the description and values for StrikePrice - Section 3.10.1 – Clarification add for Price field - Section 4.4 – Clarification added for Market Alert message | | | |
|------|---------------|---|--|--|--|
| 1.8 | 6 Feb 2015 | | he following updates: 0.1 – Clarification added for important message – Market ID table updated | | |
| 1.9 | 8 Sep 2015 | Revised Edition with the Section 8.1 | he following updates: I – Market States updated | | |
| 1.10 | 22 Jan 2016 | 4 July 2016 16 Jan 2017 | Changes Clarifications - Section 3.4.2 – Revise description for Sequence Reset mssage - Section 3.7.4 – Remove "*" in SeriesStatus field and the associated remark - Section 3.8.1 – Amend format for Date and Time fields Data Enrichment - Section 3.10.2 – Remove the note stating that combo series is not covered - Section 3.10.2 – Include cancelled trades already "given up" Introduction of Volatility Control Mechanism (VCM) - Section 3.8.1 – Add the meaning for value 0 for "State" in Market Status - Section 8.1 – Add 4 new State values for VCM Introduction of a new Disaster Recovery (DR) mechanism - Section 2.2.4.2 – Add paragraphs to describe the new DR mechanisms - Section 3.2 – Add message type 105 for Disaster Recovery Signal - Section 3.4.3 – Add Disaster Recovery Signal (105) message | | |
| 1.11 | 8 Apri 2016 | | Changes Introduction of New Sector Index Futures Contracts - Appendix 8.4 – Add new market ID#60 for Sector Index Futures | | |
| 1.12 | 21 April 2016 | 30 May 2016 | Changes Introduction of New Renminbi (RMB) Currency Futures Contracts - Appendix 8.4 – Add new market ID#122 and #125 for New Renminbi (RMB) currency Futures | | |
| 1.13 | 11 May 2016 | 4 July 2016 | Changes Clarifications - Section 2.2 – Add description for non-trading day data transmission arranegement Data Enrichment - Section 3.1.1 – Revised as Null Value wil also be found in Trade Amendment (356) message - Section 3.10.2 – Clarify field values of Price and Quantity in Trade Amdnemdnt (356) message for cancelled trades already "given up" | | |
| 1.14 | 27 July 2016 | | he following updates: Changes Clarifications - Section 8.1 – Market States updated | | |

© Copyright 2020 HKEX 4/67

| | | Revised Edition with | n the following updates: | | |
|------|---------------|---|--|--|--|
| | | Effective Date | Changes | | |
| 1.15 | 4 Jan 2017 | 6 Mar 2017 | Clarifications - Section 2.2.4.2 – Remove DR mechanism based on | | |
| 1.13 | 4 Jan 2017 | | Sequence Reset message | | |
| | | | - Section 3.4.2 – Enhance descriptions to clarify Sequence | | |
| | | | Reset message | | |
| | | | | | |
| | | Revised Edition with | n the following updates: | | |
| | | Effective Date | Changes | | |
| 1.16 | 5 Jan 2017 | 20 Mar 2017 | Introduction of Renminbi (RMB) Currency Options | | |
| | | | Contracts - Appendix 8.4 – Revised Description of market ID#70 for | | |
| | | | Renminbi (RMB) Currency Options Contracts | | |
| | | | Training (Lung) control of patents controls | | |
| | | Pavisad Edition with | n the following updates: | | |
| | | | <u> </u> | | |
| 1.17 | 24 Mar 2017 | Effective Date | Changes | | |
| 1.17 | ZT WIGH ZUTT | 24 Mar 2017 | Introduction of 5-year China Ministry of Finance Treasury Bond Futures Contracts | | |
| | | | - Appendix 8.4 – Add new market ID#117 for New MOF T- | | |
| | | | Bond Futures | | |
| | | Revised Edition with | n the following updates: | | |
| 1.18 | 27 Mar 2017 | Effective Date | Changes | | |
| 1.10 | 21 IVIAI 2011 | 27 Mar 2017 | Clarifications | | |
| | | | - Section 2.2.1 – Revise description to clarify Start of Day | | |
| | | Revised Edition with the following updates: | | | |
| | | Effective Date | Changes | | |
| 4.40 | F.M. 0047 | 5 May 2017 | Introduction of Physically Settled CNH and USD Gold | | |
| 1.19 | 5 May 2017 | | Futures - Appendix 8.4 – Add new market ID#115 and 116 for | | |
| | | | Physically Settled CNH and USD Gold Futures | | |
| | | | respectively | | |
| | | | n the following updates: | | |
| | | Effective Date | Changes | | |
| | | Q1 2018 | Clarification Section 8.1 Add a new Market State "SUSDEND" | | |
| | | Q2 2018 | - Section 8.1 – Add a new Market State "SUSPEND" Data Enrichment | | |
| 1.20 | 4 July 2017 | Q2 2010 | - Section 3.7.1 – Add a new field "CommodityID" | | |
| | | | - Section 3.7.2 – Add a new field "TickStepSize" and change | | |
| | | | the description of the field "PriceQuotationFactor" - Section 3.7.4 – Add new field "PriceQuotationFactor" and | | |
| | | | Section 3.7.4 – Add new field PriceQuotationFactor and 8-byte filler | | |
| | | Revised Edition with | n the following updates: | | |
| 1.04 | 4 Can 2017 | Effective Date | Changes | | |
| 1.21 | 4 Sep 2017 | Immediate | Change of product names | | |
| | | | - Section 8.4 – Description of Market ID 37 & 38 updated | | |
| | | | n the following updates: | | |
| 4.00 | 00.0 0047 | Effective Date | Changes | | |
| 1.22 | 28 Sep 2017 | 28 Sep 2017 | Introduction of Iron Ore Futures Contracts - Appendix 8.4 – Add new market ID#118 for New Iron Ore | | |
| | | | Futures | | |
| | | Revised Edition with | n the following updates: | | |
| | | Effective Date | Changes | | |
| 1.23 | 7 Feb 2018 | Immediate | Clarification | | |
| | | | - Appendix 8.1 – Update the information of status code "28" | | |
| | | | and rename "AHFT" to "AHT | | |

© Copyright 2020 HKEX 5/67

| | | Revised Edition with | the following updates: |
|-------|-------------|--|---|
| | | Effective Date | Changes |
| 1.24 | 15 Feb 2018 | May 2019 (Upon rollout of HKATS / DCASS Upgrade) | Data Enrichment for HKATS/DCASS Upgrde Section 3.7.3 – Replace 2-byte filler with a new field "DecimalInStrikePrice" for the strike price in the same message Section 3.7.4 – Add a new value on existing field "SeriesStatus" and replace 1-byte filler with a new field "PriceMethod" Section 3.7.4 – Replace 8-byte filler with a new field "DateTimeFirstTrading" Section 3.8.2 and 3.8.3 – Revise the description Section 3.8.2 – Rename the existing field "Suspended" to "SuspensionIndicator", change the existing values and add a new value Section 3.8.2 – Replace 1-byte filler with a new field "SeriesStatus" Section 3.8.3 – Revise description for existing field "Suspended" and replace 1-byte filler with a new field "Locked" Section 3.12.1 – Clarify the content of the Open Interest (266) messages and add a next to define a business day. |
| | | D : 1512 34 | (366) message and add a note to define a business day |
| | | Effective Date | the following updates: Changes |
| 4.0.1 | 0.14 | Immediate | Introduction of MSCI AC Asia ex Japan Net Total Return |
| 1.24a | 8 May 2018 | mmodute | Index Futures Contracts - Appendix 8.4 – Add new market ID#108 for New MSCI AxJ Futures |
| | | Revised Edition with | the following updates: |
| | | Effective Date | Changes |
| 1.24b | 8 Aug 2018 | May 2019 (Upon rollout of HKATS / DCASS Upgrade) | Housekeeping and Clarification Section 3.7.2, 3.7.4, 3.8.1 – Clarify that possible values of the fields "Market" and "InstrumentGroup" are provided in Section 8.4 and 8.3 respectively Section 3.7.4 – Correct offset for the field "DateTimeFirstTrading" Section 3.12.1 – Clarify the information provided in Open Interest (366) message |
| | | Revised Edition with | the following updates: |
| | | Effective Date | Changes |
| 1.24c | 28 Sep 2018 | 5 Nov 2018 | Introduction of Hang Seng Index Total Return Index Futures and Hang Seng China Enterprises Index Total Return Index Futures Contracts - Appendix 8.4 – Add new market ID#86 for New Total Return Index (TRI) Futures |
| | | | the following updates: |
| | | Effective Date | Changes |
| 1.24d | 22 Nov 2018 | Q2 2019 | Introduction of Weekly Hang Seng Index Options and Weekly Hang Seng China Enterprises Index Options Contracts - Appendix 8.4 – Add new market ID#39 for Weekly Hang Seng Index Options and new market ID#87 for Weekly Hang Seng China Enterprises Index Options |
| | | Revised Edition with | the following updates: |
| | | Effective Date | Changes |
| 1.25 | 17 May 2019 | Immediate | Merge with OMD-D D-Lite Interface Specification Section 1.2, 1.3, 3, 4.4, 5, 6 and 7 – Update for D-Lite datafeed with paragraph and tables Clarification Section 3.1.1 – Clarify the information by adding back |
| | | | Open Interest (366) message |

© Copyright 2020 HKEX 6/67

| | | Revised Edition with | n the following updates: |
|------|---------------|----------------------|---|
| | | Effective Date | Changes |
| 4.00 | 00.11 00.10 | Immediate | Clarification |
| 1.26 | 20 May 2019 | | - Section 2.2.3 – Clarification on the determination of End of |
| | | | Business Day |
| | | | - Appendix 8.1 – Add a new Market State "DAYEND" |
| | | | |
| | | | |
| | | Revised Edition with | n the following updates: |
| 4.07 | 00 1 0040 | Effective Date | Changes |
| 1.27 | 26 Jun 2019 | Late August | Clarification |
| | | 2019 | - Section 3.10.6 and 4.4 – Remove Stock EAS information |
| | | | |
| | | Davisad Edition with | the following undetect |
| | | Effective Date | n the following updates: Changes |
| | | 5 August 2019 | Introduction of USD London Metal Mini Futures |
| | | 5 August 2019 | - Appendix 8.4 – Update description of market ID#118 for |
| 1.28 | 8 Jul 2019 | | USD base and ferrous futures and #120 for CNH London |
| | | | Metal Mini Futures |
| | | | - Appendix 8.1 – Update description of market states 21 and |
| | | | 22 to expand coverage to other markets |
| | | Revised Edition with | n the following updates: |
| | | Effective Date | Changes |
| | | 4 January 2020 | Discontinuation of Estimated Average Settlement Price |
| 1.29 | 17 Dec 2019 | | (EAS) message |
| 1.20 | 17 200 2010 | | - Sections 1.3.6, 2.2.1, 3.1.1, 3.2, 4.4 – Remove EAS |
| | | | message |
| | | | - Remove Section 3.10.6 - EAS |
| | | | - Remove Section 8.5 – List of Index Code for Index EAS |
| | | Revised Edition with | n the following updates: |
| | | Effective Date | Changes |
| 1.30 | 12 Mar 2020 | Immediate | Housekeeping and Clarification |
| 1.50 | 12 IVIAI 2020 | | - Section 3.9.6 – Clarification on Quote Request message |
| | | | - Section 8.4 – Remove the obsolete market ID #8 and add |
| | | | a remark |
| | | Davisad Edition with | the following undetect |
| | | Effective Date | n the following updates: Changes |
| | | 8 June 2020 | Introduction of Physically Settled USD and CNH Silver |
| 1.31 | 3 Apr 2020 | o dano zozo | Futures |
| | | | - Section 8.4 – Add new market ID#111 for Physically |
| | | | Settled USD Silver Futures and new market ID#112 for |
| | | | Physically Settled CNH Silver Futures |
| | | Revised Edition with | n the following updates: |
| | | Effective Date | Changes |
| | | Immediate | Housekeeping and Clarification |
| 1.32 | 2 Jun 2020 | | - Section 8.4 – Rename market ID#108 from "MSCI AxJ |
| 1.02 | 2 3011 2020 | | Futures" to "MSCI AxJ Futures (NTR)" |
| | | 6 July 2020 | Introduction of MSCI Futures and Options |
| | | | - Section 8.4 – Add new market ID#160 161, 166 and 170 |
| | | | for MSCI Futures and Options |
| | | | the following updates: |
| | | Effective Date | Changes |
| 4.00 | 10 1 0000 | Immediate | Housekeeping and Clarification |
| 1.33 | 12 June 2020 | Late Q4 2020 | - Section 3.9.6 – Clarification on Quote Request message OMD-D Technical Refresh |
| | | Late Q4 2020 | - Section 4.4 – Revise the refresh arrangement for Market |
| | | | Alert message. |
| | | | Alert message |

© Copyright 2020 HKEX 7/67

CONTENTS

| DOCUMEN | T HISTORY | 2 |
|----------|---|----|
| CONTENTS | | 8 |
| 1. INTR | ODUCTION | 11 |
| 1.1 | Purpose | 11 |
| 1.2 | READING GUIDE | 11 |
| 1.3 | Products | 11 |
| 1.3.1 | Derivatives Lite ('D-Lite') | |
| 1.3.2 | Derivatives Standard ('DS') | |
| 1.3.3 | Derivatives Trades ('DT') – Complimentary Feed to DS and D-Lite | |
| 1.3.4 | Derivatives Premium ('DP') | |
| 1.3.5 | Derivatives Fulltick ('DF') | |
| 1.3.6 | Summary Table | |
| 2. SYST | 'EM OVERVIEW | 14 |
| 2.1 | SCOPE | 14 |
| 2.1.1 | Multicast | 14 |
| 2.1.2 | Dual Multicast Channels | 14 |
| 2.1.3 | Recovery Mechanisms | 14 |
| 2.2 | Session Management | 14 |
| 2.2.1 | Start of Day | 15 |
| 2.2.2 | Normal Transmission | 15 |
| 2.2.3 | End of Day | 15 |
| 2.2.4 | Error Recovery | |
| 2.3 | Trading Sessions | 16 |
| 2.3.1 | Extended Trading Hours | 16 |
| 2.4 | RACE CONDITIONS | 16 |
| 3. MES | SAGE FORMATS | 17 |
| 3.1 | Data Types | 17 |
| 3.1.1 | Null Values | |
| 3.1.2 | Currency Values | 17 |
| 3.1.3 | Decimal Values | 17 |
| 3.1.4 | Bitmap Values | |
| 3.2 | PACKET STRUCTURE | 18 |
| 3.3 | PACKET HEADER | 19 |
| 3.4 | CONTROL MESSAGES | |
| 3.4.1 | Heartbeat | |
| 3.4.2 | Sequence Reset (100) | |
| 3.4.3 | Disaster Recovery Signal (105) | 20 |
| 3.5 | RETRANSMISSION | 21 |
| 3.5.1 | Logon (101) | 21 |
| 3.5.2 | Logon Response (102) | 21 |
| 3.5.3 | Retransmission Request (201) | 22 |
| 3.5.4 | Retransmission Response (202) | 22 |
| 3.6 | Refresh | 22 |
| 3.6.1 | Refresh Complete (203) | |
| | | |

| 3.7 | REFERENCE DATA | |
|-----------------------|-------------------------------|------------------|
| 3.7.1 | Commodity Definition (301) | |
| 3.7.2 3.7.3 | | |
| 3.7.4 | , , | |
| 3.7.5 | · · · · | |
| 3.8 | Status Data | 30 |
| 3.8.1 | Market Status (320) | |
| 3.8.2 | • • | |
| 3.8.3 | Commodity Status (322) | 31 |
| 3.9 | Order Book Data | 32 |
| 3.9.1 | Add Order (330) | |
| 3.9.2 | | |
| 3.9.3 | (/ | |
| 3.9.4 | 33 -3 | |
| 3.9.5 3.9.6 | , , | |
| | | |
| 3.10 <i>3.10.1</i> | TRADE AND PRICE DATA | |
| 3.10.1 | 36 | |
| _ | Deriviatives Trade feed) | 36 |
| 4 | 36 | |
| 3.10.2 | 2 Trade Amendment (356) | 37 |
| A | 38 | |
| (via E | Deriviatives Trade feed) | 38 |
| A | 38 | |
| 3.10.3 | | |
| 3.10.4 3.10.5 | | |
| | | |
| 3.11 | NEWS | |
| 3.11.1 | | |
| 3.12 | CLEARING INFORMATION | |
| 3.12.1 | - P | |
| 3.12.2 | 2 Implied Volatility (367) | 42 |
| 4. REC | COVERY | 44 |
| 4.1 | GAP DETECTION | 44 |
| 4.2 | LINE ARBITRATION | Λ ⁻ 5 |
| 4.3 | RETRANSMISSION SERVICE | |
| | | |
| 4.4 | Refresh service | |
| 4.4.1 | Refresh of Market Status | 51 |
| 5. FUL | LLTICK ORDERBOOK MANAGEMENT | 52 |
| 6. AG | GREGATE ORDER BOOK MANAGEMENT | 53 |
| 7. AU | CTION PERIOD SPECIAL HANDLING | 62 |
| 8. HKE | EX DERIVATIVES MARKET | 63 |
| 8.1 | Market States | 63 |
| _ | | |
| 8.2 | DEAL SOURCES | |
| 8.3 | LIST OF INSTRUMENT CODE | 6f |

© Copyright 2020 HKEX

10/67

1. INTRODUCTION

1.1 Purpose

This document specifies the Binary interface of the HKEX Orion Market Data Platform "OMD" for the Derivatives Market.

This document is the Transmission Specification(s) of the relevant Datafeed(s) under your Market Data Vendor License Agreement or the Market Data End-User License Agreement ("License Agreement"). Please refer to Section 1.2 and the summary table at Section 1.3 for the information applicable to the Datafeed(s) under your License Agreement.

HKEX endeavors to ensure the accuracy and reliability of the information provided in this interface specification, but takes no responsibility for any errors or omissions or for any losses arising from decisions, action, or inaction based on this information. The Licensee shall not use such interface specifications for any purpose other than as expressly permitted under the Licence Agreement. No part of this document may be copied, distributed, transmitted, transcribed, stored in a retrieval system, translated into any human or computer language, or disclosed to third parties without written permission from HKEX-IS.

1.2 READING GUIDE

The chapters following this introduction are:

Chapter 2: System Overview

Chapter 3: Message Formats

Chapter 4: Recovery

Chapter 5: FullTick Order Book Management

Chapter 6: Aggregated Order Book Management

Chapter 7: Auction Period Special Handling

Chapter 8: HKEX Derivatives Market

All chapters except Chapter 3 are applicable to all Datafeeds unless otherwise specified. In Chapter 3, there are indications* in individual sections/sub-sections for their applicability to individual Datafeeds. Below is an example of the table along with explanations of what each of the datafeeds represent.

The information is also summarised in Section 1.3 Summary Table.

* Example: Section 3.3 is applicable to D-Lite, DS, DP and DF datafeed.

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.3 | • | • | • | • |

1.3 PRODUCTS

A range of products are provided catering for the varying needs of OMD clients. The products are described below.

Each of the 4 datafeeds described in this section are available by splitting into two separate sets of multicast group channels for the Stock Options Market and the Non-Stock Options Markets to better serve OMD clients on bandwidth consumption planning. Messages are applicable to datafeeds irrespective of whether it belongs to Stock Options Market or non-Stock Options Markets. For the avoidance of doubt, Stock Options Market ("SOM") refer to the market for trading the stock option that is a financial contract based on a single underlying stock which is traded on SEHK and cleared through the SEHK Options Clearing House Limited (SEOCH). Non-Stock Options Markets ("Non-SOM") refer to the markets of trading HKEX derivatives products on HKFE. For the latest list of derivatives products on HKFE, please refer to the HKEX website."

© Copyright 2020 HKEX 11/67

1.3.1 Derivatives Lite ('D-Lite')

This is a conflated feed for Derivatives Market data which provides Level 2 book showing up to 5 aggregated price levels.

1.3.1.1 Complimentary Feed to D-Lite – D-Lite Order Feed ('Order Feed')

Order Feed is a conflated feed providing all outstanding orders of VCM series every second and is offered complimentarily to the D-Lite clients.

1.3.2 Derivatives Standard ('DS')

This is a conflated feed for Derivatives Market data which provides Level 2 book showing up to 10 aggregated price levels.

1.3.3 Derivatives Trades ('DT') – Complimentary Feed to DS and D-Lite

DT is a streaming trades feed with all Trade and Trade Amendments and is offered complimentarily to the DS and D-Lite clients.

1.3.4 Derivatives Premium ('DP')

This is a streaming feed for Derivatives Market data which provides Level 2 book showing up to 10 aggregated price levels plus an aggregated 11th level showing total order volume beyond the 10th level. This datafeed also includes Trades and Trade Amendments. Please see note on trade and order handling.

1.3.5 Derivatives Fulltick ('DF')

This is a streaming feed containing the full order book and which includes individual orders, trades and trade amendments.

1.3.6 Summary Table

The products above are shown below – please note specific chapters that are relevant to the individual products.

- The information supplied in the corresponding sub-section applies to the Datafeed(s)
- ▲ Complimentary service to the Datafeed(s)

| Section | Message Formats | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|-----------------------------------|------------------------------|---------------------------------|--------------------------------|---------------------------------|
| 3.1 | Data Types | • | • | • | • |
| 3.2 | Packet Structure | • | • | • | • |
| 3.3 | Packet Header | • | • | • | • |
| 3.4 | Control Messages | • | • | • | • |
| 3.5 | Retransmission | • | • | • | • |
| 3.6 | Refresh | • | • | • | • |
| 3.7 | Reference Data | • | • | • | • |
| 3.8 | Status Data | • | • | • | • |
| 3.9.1 | Add Order (330) | A | | | • |
| 3.9.2 | Modify Order (331) | | | | • |
| 3.9.3 | Delete Order (332) | | | | • |
| 3.9.4 | Aggregate Order Book Update (353) | • | • | • | |
| 3.9.5 | Orderbook Clear (335) | | | | • |
| 3.9.6 | Quote Request (336) | • | • | • | • |

© Copyright 2020 HKEX 12/67


| 3.10.1 | Trade (350) | A | A | • | • |
|--------|------------------------------------|----------|----------|---|---|
| 3.10.2 | Trade Amendment (356) | A | A | • | • |
| 3.10.3 | Trade Statistics (360) | • | • | | |
| 3.10.4 | Series Statistics (363) | | | • | |
| 3.10.5 | Calculated Opening Price (364) | • | • | • | • |
| 3.11.1 | Market Alert (323) | • | • | • | • |
| 3.12.1 | Open Interest (366) | • | • | • | |
| 3.12.2 | Implied Volatility (367) | | | • | |
| 5 | FullTick OrderBook | A | | | • |
| 6 | Aggregate Order Book Management | • | • | • | |

© Copyright 2020 HKEX 13/67

2. SYSTEM OVERVIEW

2.1 SCOPE

Figure 1: Access to Market Data



OMD provides market data represented in an efficient binary message format for all instruments traded on the Derivatives Market. It has been designed for high throughput and low latency.

2.1.1 Multicast

Messages are published in a one-to-many fashion using the IP multicast and UDP transport protocols. Multicast is not a connection-oriented protocol. Data is sent strictly in one direction from server to clients.

2.1.2 **Dual Multicast Channels**

Due to the inherently unreliable nature of the UDP transport, packets may be lost or delivered out-of-order. To mitigate the risk of packet loss, the messages are duplicated and sent over two separate multicast channels (dual channels). Technically, a multicast channel corresponds to a multicast group.

Each pair of dual multicast channels has a unique identifier, which is referred to as the ChannellD.

More details regarding the configuration parameters (including IP addresses, port numbers corresponding to the multicast channels) will be found in a Connectivity Guide which will be provided at a later stage.

2.1.3 Recovery Mechanisms

OMD provides two recovery mechanisms:

- A retransmission server provides on request gap-fill retransmission of lost messages. The retransmission requests and gap-fill replies are point-to-point (TCP/IP connection).
- A refresh server provides snapshots of the market state at regular intervals throughout the business day. Snapshots are sent using multicast on separate channels for the real time messages.

2.2 Session Management

Each multicast channel maintains its own session. A session is limited to one business day. During this day the message sequence number is strictly increasing and therefore unique within the channel.

OMD-D does not operate on non-trading days of the Hong Kong Derivative Market where a trading day ends at the close of the after hour trading session. HKEX may perform system testing on Saturdays, Sundays or days when OMD-D is not in operation. Clients should treat data transmitted via OMD-D on those days as non production data and disregard them.

© Copyright 2020 HKEX 14/67

2.2.1 Start of Day

Housekeeping and system maintenance work may take place overnight until 6:00am. In this regard, Clients are advised to make connection to OMD Derivatives Market ("OMD-D") at or after 6:00am every business day to ensure that the data received from OMD-D are good for the start of the day. Please also refer to the OMD-D Developer's Guide for more information.

On each channel the first message at the start of the business day is the Sequence Reset message. The Sequence Reset message carries sequence number 1. On receipt of this message, the client must clear all cached data for all instruments.

The messages sent at start of day are:

- Commodity Definition, Class Definition, Series Definition Base, Series Definition Extend and Combination, messages for all tradeable series, including Combo Series
- · Latest series quotation and trade snapshot.
- Latest market and series status snapshot
- Previous day open interest & settlement information for all tradeable series if available
- The latest Market message, COP

If a client starts listening after the start of business day and misses the Sequence Reset message and reference data, it must use the refresh service to recover and synchronize with the real time channels.

2.2.2 Normal Transmission

Normal message transmission is expected between when the market opens for trading and when the market is closed. Heartbeats are sent every at regular intervals (currently set at every 2 seconds) on each channel when there is no activity. HKEX may adjust this interval.

2.2.3 End of Day

OMD will typically shut down following the end of after hours trading and later shutdown is possible to cater for special circumstances. Shutdown time is not rigid and the Exchange has the right to adjust this time according to the different trading situations.

Clients should wait for a Market Status (320) message marking "99 - End of Business Day" before disconnecting.

2.2.4 Error Recovery

2.2.4.1 System Component Failure

If a system component fails that leads to a small amount of packet loss and requires a failover or restart, there will be a short interruption in multicast dissemination from either Line A or Line B. The system is deployed in an active-active configuration with Line A and Line B being generated independently and so line arbitration will allow the client to continue receiving messages – see section 4 for more information about recovery.

2.2.4.2 Disaster Recovery

In the unlikely event of a disaster recovery situation at the primary site, OMD will be brought up at the disaster recovery (DR) site.

During the interruption, no data will be sent including heartbeats.

A Disaster Recovery (DR) Signal message indicating the DR status will also be sent on its dedicated channel when OMD is brought up – see section 3 for more information about the DR Signal message. See Developers Guide for more details.

IP addresses and ports that have been provided for the disaster site's retransmission service should be used. See Connectivity Guide for more details.

© Copyright 2020 HKEX

2.3 TRADING SESSIONS

Normally, trading is conducted in auction trading session(s) and continuous trading session(s) every trading day. However, there are situations where there is only half day trading with fewer trading session(s) (Christmas eve, New Year eve and Chinese New Year eve), or a trading session is suspended due to a typhoon etc. OMD is not affected by the number of trading sessions and will continue to provide real time data as long as the Exchange's trading system is available.

2.3.1 Extended Trading Hours

Extended trading hours may apply to certain products. Trading hours of individual products are listed on the HKEX website.

2.4 RACE CONDITIONS

Due to the nature of the dissemination protocol the real time order/trade data and reference data are disseminated via separate channels so users need to be aware that there is a race condition.

As an example suppose a Market Status message is sent showing a change to state 'Closed', however for a very short time after this message the regular order and trade information for this series may continue to arrive.

© Copyright 2020 HKEX 16/67

3. MESSAGE FORMATS

3.1 DATA TYPES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.1 | • | • | • | • |

The following table lists all the data types used by OMD.

| Format | Description |
|--------|--|
| String | ASCII characters which are left aligned and padded with spaces, unless otherwise specified. |
| Uint8 | 8 bit unsigned integer. |
| Uint16 | Little-Endian encoded 16 bit unsigned integer. |
| Uint32 | Little-Endian encoded 32 bit unsigned integer. |
| Uint64 | Little-Endian encoded 64 bit unsigned integer. |
| Int16 | Little-Endian encoded 16 bit signed integer. |
| Int32 | Little-Endian encoded 32 bit signed integer. |
| Int64 | Little-Endian encoded 64 bit signed integer. |
| Binary | Unicode encoding used for Chinese characters which are left aligned and padded with binary null. |

3.1.1 Null Values

From time to time certain fields cannot be populated and specific values are used to represent null. This is currently used within Int32 fields of the Trade (350) message, the Aggregate Order Book Update (353) message, the Trade Statistics (360) message, the Series Statistics (363) message, the Calculated Opening Price (364) message, the Trade Amendment (356) message, the Open Interest (366) message as well as the Add / Modify Order messages.

| Format | Null representation (Hex 2's complement) |
|--------|--|
| Int32 | 0x80000000 |
| Int64 | 0x8000000000000 |

3.1.2 Currency Values

See the ISO-3166 Currency Codes for a full list of possible data values. Currently the system uses the following codes; 'HKD', 'USD', 'CNY'. HKEX may add or delete currency code(s), whenever applicable, in the future.

3.1.3 Decimal Values

Decimal values are sent as integers. This is done for efficiency - for example, a price value sent as "12345" and with 3 decimal places should be interpreted as "12.345". See individual fields for number of decimal places used.

3.1.4 Bitmap Values

Certain fields within the Add Order (330), Modify Order (331) and Trade (350) messages are bitmap representations which can denote a number of properties within a single field.

For example, with the 'DealType' field shown below, if a value of 3 is received this indicates that the trade is both "Printable" and a 'Occurred at Cross'.

© Copyright 2020 HKEX 17/67

| Offset | Field | Format | Len | Description | Values |
|--------|----------|--------|-----|------------------|--|
| 33 | DealType | Uint8 | 1 | Deal Type Bitmap | NonePrintable (see note)Occurred at CrossReported Trade |

Note: The Printable property does not apply to Reported Trade. For other trades, i.e. trades matched by the trading system, it will be OFF for trades on Combo Series to avoid double counting of the trade quantity to market turnover.

3.2 PACKET STRUCTURE

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite | Derivatives Standard | Derivatives Premium | Derivatives FullTick | |
|---------|------------------|----------------------|---------------------|----------------------|--|
| | (D-Lite) | (DS) | (DP) | (DF) | |
| 3.2 | • | • | • | • | |

Multicast packets are structured into a common packet header followed by zero or more messages. Messages within a packet are laid out sequentially, one after another without any spaces between them.

| Packet Header | Message 1 | Message 2 | Message n |
|---------------|-----------|-----------|---------------|
| | | | |

The maximum length of a packet is 1500 bytes which includes the multicast headers, packet header and messages.

The packet header provides information including the total packet length, the number of messages within the packet, the sequence number of the first message and a send timestamp.

A packet will only ever contain complete messages. A single message will never be fragmented across packets.

The format of each message within a packet will vary according to message type. However, regardless of the message type, each message will start with a two-byte message size (MsgSize) followed by a two-byte message type (MsgType). These are described in the following table.

Table 1: MsgSize and MsgType Fields

| Field | Format | Len | Description |
|---------|--------|-----|---------------------------------------|
| MsgSize | Uint16 | 2 | Message length (including this field) |

© Copyright 2020 HKEX 18/67

| Field | Format | Len | Description |
|---------|--------|-----|--|
| MsgType | Uint16 | 2 | Type of message. The valid values for MsgType are below: 100 Sequence Reset 101 Logon 102 Logon Response 201 Retransmission Request 202 Retransmission Response 203 Refresh Complete 301 Commodity Definition 302 Class Definition 303 Series Definition Base 304 Series Definition Extended 305 Combination Definition 320 Market Status 321 Series Status 322 Commodity Status 330 Add Order 331 Modify Order 332 Delete Order 335 Aggregate Order Book Update 335 Orderbook Clear 336 Quote Request 350 Trade 356 Trade Amendment 360 Trade Statistics 363 Series Statistics 364 Calculated Opening Price 323 Market Alert 366 Open Interest 367 Implied Volatility |

3.3 PACKET HEADER

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) | |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|--|
| 3.3 | • | • | • | • | |

All packets will begin with a common packet header.

| Offset | Field | Format | Len | Description |
|-----------|---------------|--------|-----|---|
| 0 | PktSize | Uint16 | 2 | Size of the packet (including this field) |
| 2 | MsgCount | Uint8 | 1 | Number of messages included in the packet |
| 3 | Filler | String | 1 | |
| 4 | SeqNum | Uint32 | 4 | Sequence number of the first message in the packet |
| 8 | SendTime | Uint64 | 8 | UTC Timestamp. The number of nanoseconds since <i>January 1</i> , 1970, 00:00:00 <i>GMT</i> , precision is provided to the nearest millisecond. |
| Packet le | Packet length | | 16 | |

© Copyright 2020 HKEX 19/67

3.4 CONTROL MESSAGES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.4 | • | • | • | • |

3.4.1 Heartbeat

Heartbeats consist of a packet header with MsgCount set to 0. They do not carry a sequence number and therefore do not increment the sequence number of the multicast channel. SeqNum is set to the sequence number of the previous message sent on the channel.

The Heartbeat message will be identical for all the services.

3.4.2 Sequence Reset (100)

The Sequence Reset message is sent on each multicast channel at start of day. It may also be sent when there is a need for the rectification of stock reference data before market open.

The client must ignore the sequence number of the Sequence Reset message itself, and set the next expected sequence number to NewSeqNo. The client may receive multiple sequence reset messages from all channels. Whenever the Sequence Reset message is received, clients must clear all cached data for all instruments traded in the Derivatives Market and then subscribe to the refresh channels to receive the current state of the market.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|----------|--------|-----|----------------------|--------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 100 Sequence Reset |
| 4 | NewSeqNo | Uint32 | 4 | New sequence number. | Always set to 1 |
| Total Len | ath | | 8 | | |

3.4.3 Disaster Recovery Signal (105)

The Disaster Recovery (DR) Signal message is sent on a dedicated multicast channel (DR channel) whenever site failover is triggered. In normal situation, the dedicated DR channel only carries Heartbeat till end of business day.

When site failover begins, DR Signal is sent with "DRStatus=1" indicating that the DR process has been activated. Clients should then clear all cached market data and prepare their own system for the site failover. When the site failover process finishes, DR Signal will be sent with "DRStatus=2" thereupon clients could start rebuild the latest market image from the refresh service. The same DR Signal will be sent periodically until end of business day.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------------|----------|--------|-----|-----------------------------|-------------------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 105 DR Message |
| 4 | DRStatus | Uint32 | 4 | Status during site failover | 1 – DR in progress 2 – DR completed |
| Total Length | | | 8 | | |

© Copyright 2020 HKEX 20/67

3.5 RETRANSMISSION

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.5 | • | • | • | • |

Refer to Retransmission service for details on the retransmission messages.

Note that when the Logon (101) or Retransmission Request (201) messages are sent to the OMD server, the client must also include a packet header as shown below.

Also note that the same header is used by the RTS server when sending either Logon Response (102) or Retransmission Response (202) messages to clients. Again in this case the SeqNum and SendTime fields are not relevant and can be discarded.

| Offset | Field | Format | Len | Values | Notes |
|-----------|----------|--------|-----|--------|---|
| 0 | PktSize | Uint16 | 2 | 32 | 16 bytes for this header plus 16 bytes for either the Logon (101) or Retransmission Request (201) message |
| 2 | MsgCount | Uint8 | 1 | 1 | One message only |
| 3 | Filler | String | 1 | | Empty Filler |
| 4 | SeqNum | Uint32 | 4 | 0 | This field is not used |
| 8 | SendTime | Uint64 | 8 | 0 | This field is not used |
| Total Len | gth | | 16 | | |

After this header, the fields for either Logon (101) or Retransmission Request (201) should follow.

Please note that Retranmission service is not available for Add Order (330) message disseminated in the D-Lite – Order Feed which provides a snapshot message refreshed every second.

3.5.1 Logon (101)

The Logon message enables client authentication. This is not required for multicast channels and is only used for retransmission requests.

Normal operation: Client sends a Logon message containing username to the OMD, which responds with a Logon Response message with the SessionStatus set to 0 (Session Active).

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|--|-----------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 101 Logon |
| 4 | Username | String | 12 | Username to log on, padded with binary null characters | |
| Total Len | Total Length | | 16 | | |

3.5.2 Logon Response (102)

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|---------------|--------|-----|-----------------------|--------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 102 Logon Response |
| 4 | SessionStatus | Uint8 | 1 | Status of the session | O Session Active |

© Copyright 2020 HKEX 21/67

| Offset | Field | Format | Len | Description | Values |
|-----------|--------|--------|-----|-------------|---|
| | | | | | Invalid username or IP addressUser already connected |
| 5 | Filler | String | 3 | | |
| Total Len | ath | | 8 | | |

3.5.3 Retransmission Request (201)

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------|--------|-----|---|----------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 201 Retransmission Request |
| 4 | ChannelID | Uint16 | 2 | Multicast Channel ID to which the retransmission relates | |
| 6 | Filler | String | 2 | | |
| 8 | BeginSeqNum | Uint32 | 4 | Beginning of sequence | |
| 12 | EndSeqNum | Uint32 | 4 | Message sequence number of last message in range to be resent | |
| Total Len | igth | | 16 | | |

3.5.4 Retransmission Response (202)

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|---------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 202 Retransmission Response |
| 4 | ChannelID | Uint16 | 2 | Multicast Channel ID with which the retransmission relates | |
| 6 | RetransStatus | Uint8 | 1 | Status of the Retransmission response | Request accepted Unknown/Unauthorized channel ID Messages not available Exceeds maximum sequence range Exceeds maximum requests in a day |
| 7 | Filler | String | 1 | | |
| 8 | BeginSeqNum | Uint32 | 4 | Beginning of sequence | |
| 12 | EndSeqNum | Uint32 | 4 | Message sequence number of last message in range to be resent | |
| Total Len | igth | | 16 | | |

3.6 REFRESH

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.6 | • | • | • | • |

Refer to Refresh service for details on the Refresh Complete message.

© Copyright 2020 HKEX 22/67

3.6.1 Refresh Complete (203)

This message is published to mark the end of a refresh cycle, see section 4.4 for a full description of refresh.

It is also published to mark the end of a snapshot cycle of Add Order (330) messages disseminated in D-Lite – Order Feed.

Message Fields


| Offset | Field | Format | Len | Description | Values |
|--------------|------------|--------|-----|---|----------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 203 Refresh Complete |
| 4 | LastSeqNum | Uint32 | 4 | Sequence number with which the refresh is synchronized. | Numerical |
| Total Length | | 8 | | | |

3.7 REFERENCE DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.7 | • | • | • | • |

Static Reference data is organized into 5 messages which are shown in the entity relationship diagram below. The underlined field(s) form the primary key for each message type.

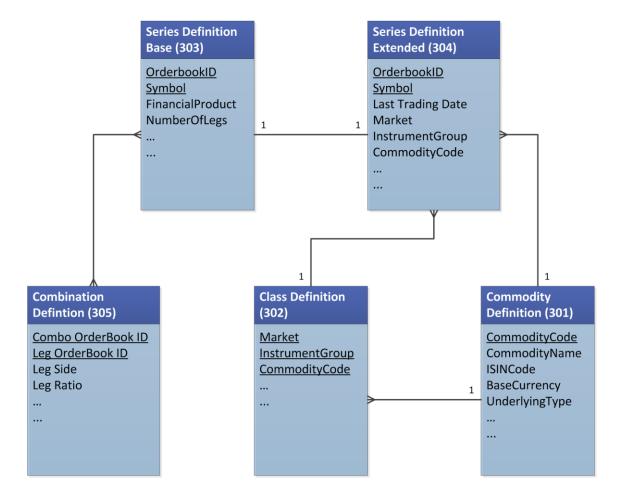

© Copyright 2020 HKEX 23/67

3.7.1 Commodity Definition (301)

Describes individual commodities available from the OMD-D system.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|----------|--------------------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 301 Commodity Definition |
| 4 | CommodityCode | Uint16 | 2 | Numerical identifier of the Underlying. This is the unique identifier of the message. The Series Definition Extended and the Class Definition are retrieved through this field which links them to the Commodity Definition. eg. 2005 (HKB). | |
| 6 | DecimalInUnderlyingPrice | Uint16 | 2 | Number of implicit decimals in the underlying price received from external sources. | |
| 8 | ISINCode | String | 12 | A code which uniquely identifies a specific securities issue (International Securities Identification Number). For more information about ISIN code, see the international standard ISO 3166. | |
| 20 | BaseCurrency | String | 3 | Defines the trading currency for the instrument or the currency for the underlying. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard. | See Currency Values in section 3.1.2 for full details. |
| 23 | UnderlyingPriceUnit | Uint8 | 1 | The price unit for the underlying | Price Yield * Points Yield Diff * IMM Index * Basis Points * Inverted Yield * Percentage of Nominal * Dirty Price * |
| 24 | CommodityName | String | 32 | Descriptive Name of the underlying Eg. Hang Seng Index | |
| 56 | NominalValue | Int64 | 8 | Nominal Value of the Commodity | Applicable for 3-Year EFN Futures only |
| 64 | UnderlyingCode | String | 20 | Underlying Code of the Commodity | |
| 84 | UnderlyingType | Uint8 | 1 | Type of the underlying | Stock Currency Interest rate Energy * Soft and Agrics * Metal Stock Index Currency Index * Interest Rate Index * Energy Index * Softs and Agrics Index * Metal Index * |
| 85 | EffectiveTomorrow | Uint8 | 1 | This declaration is for series to be traded the next day | O False 1 True |
| 86 | CommodityID | String | 6 | Commodity ID of the underlying E.g. HSB | |
| 92 | Filler | String | 2 | | |
| Total Le | ngtn | | 94 | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

© Copyright 2020 HKEX 24/67

3.7.2 Class Definition (302)

Describes individual instrument classes available from the OMD-D system. The key of a Class Definition is composed by Country, Market, Instrument Group and Commodity Code.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|-----------------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 302 Class Definition |
| 4 | Country | Uint8 | 1 | Country Identifier | |
| 5 | Market | Uint8 | 1 | Market Code | See section 8.4 for a list of possible values |
| 6 | InstrumentGroup | Uint8 | 1 | Instrument Group. This field together with the Commodity, forms the unique identifier of the message | See section 8.3 for a list of possible values |
| 7 | Modifier | Uint8 | 1 | Expiration date modified. Value is incremented by one each time the instrument is involved in an issue, split, etc. Note that the modifier value can be different for Call and Put options that have the same expiration and strike price. | 0-255 |
| 8 | CommodityCode | Uint16 | 2 | Numerical identifier of the Underlying This field, together with the InstrumentGroup forms the unique identifier of the message The Commodity Definition and the Series Definition Extended are retrieved through this field which links them to the Class Definition Eg. eg. 2005 (HKB). | |
| 10 | Filler | String | 2 | | |
| 12 | PriceQuotationFactor | Int32 | 4 | Implies the contracted value of the product / series | Decimal places determined from Class Definition field "DecimalInContractSize" |
| 16 | ContractSize | Uint32 | 4 | Number of Underlying entities per contract. | Decimal places determined from Class Definition field "DecimalInContractSize" |
| 20 | DecimalInStrikePrice | Uint16 | 2 | Number of implicit decimals in the strike price. | |
| 22 | DecimalInContractSize | Uint16 | 2 | Number of implicit decimals in the Contract Size and the Price Quotation Factor fields. | |
| 24 | DecimalInPremium | Uint16 | 2 | The number of decimals used in Price fields | |
| 26 | RankingType | Uint16 | 2 | This identifies how the instrument is ranked. | Price, Time Inverted Price, Time * Price, Traders before MM, Time * Inverted Price, Traders before MM, Time * Price, MM before Traders, Time * Inverted Price, MM before Traders, Time * Price, Baits before Normal Orders, Time * Inverted Price, Baits before Normal Orders, Time * Price, Own Orders, Time * Inverted Price, Own Orders, Time * |

© Copyright 2020 HKEX 25/67

| Offset | Field | Format | Len | Description | Values |
|--------------|----------------------|--------|-----|---|---|
| 28 | Tradable | Uint8 | 1 | Defines if the instrument is a tradable instrument or not. | 1 Yes 2 No |
| 29 | PremiumUnit4Price | Uint8 | 1 | The premium unit that describes the price unit in the order. | Price Yield * Points Yield Diff * IMM Index * Basis Points * Inverted Yield * Percentage of Nominal * Dirty Price * |
| 30 | BaseCurrency | String | 3 | Defines the trading currency for the instrument or the currency for the underlying. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard. | See Currency Values in section 3.1.2 for full details. |
| 33 | InstrumentClassID | String | 14 | The ASCII representation of the instrument class. | |
| 47 | InstrumentClassName | String | 32 | The full ASCII representation. name short | |
| 79 | IsFractions | String | 1 | Is the premium internally represented as fractions? | Y Yes N No |
| 80 | SettlementCurrencyID | String | 32 | Full descriptive name of the Settlement Currency. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard. | See Currency Values in section 3.1.2 for full details. |
| 112 | Effective Tomorrow | Uint8 | 1 | This declaration is for series to be traded the next day | 0 False 1 True |
| 113 | TickStepSize | Int32 | 4 | Minimum Fluctuation of the product / series | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 117 | Filler | String | 1 | | |
| Total Length | | | 118 | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

3.7.3 Series Definition Base (303)

Describes basic series information.

Message Fields

| Offs | et Field | Format | Len | Description | Values |
|------|---------------|--------|-----|---|----------------------------|
| | 0 MsgSize | Uint16 | 2 | Size of the message | |
| | 2 MsgType | Uint16 | 2 | Type of message. | 303 Series Definition Base |
| | 4 OrderbookID | Uint32 | 4 | Numerical identifier of the order book This is the unique identifier for the series The Combination Definition is retrieved through this field which links it to the Series Definition Base | |

© Copyright 2020 HKEX 26/67

| Offset | Field | Format | Len | Description | Values |
|----------|-----------------------|--------|-----|--|---|
| 8 | Symbol | String | 32 | Short Name | |
| 40 | FinancialProduct | Uint8 | 1 | Financial Product | 1 Option 2 Forward * 3 Future 4 FRA * 5 Cash * 6 Payment * 7 Exchange Rate * 8 Interest Rate Swap * 9 REPO * 10 Synthetic Box Leg/Reference * 11 Standard Combination 12 Guarantee * 13 OTC General * 14 Equity Warrant * 15 Security Lending * |
| 41 | NumberOfDecimalsPrice | Uint16 | 2 | The number of decimals used in Price fields | |
| 43 | NumberOfLegs | Uint8 | 1 | Number of legs in the series There can be up to 256 legs per series | |
| 44 | StrikePrice | Int32 | 4 | In general, it is the price at which a specific options series can be exercised. Zero implies the Strike Price is not applicable, e.g. for futures contracts. For Combo Series, this field may not have meaning but can be used with other fields such as CommodityCode, ExpirationDate, InstrumentGroup and Modifier to differentiate the series from the others. | Decimal places determined from "DecimalInStrikePrice". Not applicable for Combo Series. |
| 48 | ExpirationDate | String | 8 | Expiry date of the series | YYYYMMDD |
| 56 | DecimalInStrikePrice | Uint16 | 2 | Number of implicit decimals in the strike price. | |
| 58 | PutOrCall | Uint8 | 1 | Identifies whether the series is a put or call type | UndefinedCallPut |
| 59 | Filler | String | 1 | | |
| Total Le | ength | | 60 | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

3.7.4 Series Definition Extended (304)

Describes series static data.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|-------------|--------|-----|---------------------|--------------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 304 Series Definition Extended |
| 4 | OrderBookID | UInt32 | 4 | Orderbook ID | o If Not Available |

© Copyright 2020 HKEX 27/67

| Offset | Field | Format | Len | Description | Values |
|--------|-------------------|---------|------|--|---|
| Onoot | Tiolu | Torride | LOTT | Symbol | Valuoo |
| 8 | Symbol | String | 32 | This is the unique identifier of the message | |
| 40 | Country | Uint8 | 1 | Country Identifier | |
| 41 | Market | Uint8 | 1 | Market Code | See section 8.4 for a list of possible values |
| 42 | InstrumentGroup | Uint8 | 1 | Instrument Group | See section 8.3 for a list of possible values |
| 43 | Modifier | Uint8 | 1 | Expiration date modified. Value is incremented by one each time the instrument is involved in an issue, split, etc. Note that the modifier value can be different for Call and Put options that have the same expiration and strike price. | 0-255 |
| 44 | CommodityCode | Uint16 | 2 | Numerical identifier of the Underlying This is the unique commodity identifier. The Commodity Definition and the Class Definition are retrieved through this field which links them to the Series Definition Extended Eg. HSI | |
| 46 | ExpirationDate | Uint16 | 2 | Expiry date of the series | |
| 48 | StrikePrice | Int32 | 4 | In general, it is the price at which a specific options series can be exercised. Zero implies the Strike Price is not applicable, e.g. for futures contracts. For Combo Series, this field may not have meaning but can be used with other fields such as CommodityCode, ExpirationDate, InstrumentGroup and Modifier to differentiate the series from the others. | Decimal places determined from Class Definition field "DecimalInStrikePrice". Not applicable for Combo Series. |
| 52 | ContractSize | Int64 | 8 | Number of Underlying entities per contract. | Decimal places determined from Class Definition field "DecimalInContractSize" O If Not Available |
| 60 | ISINCode | String | 12 | A code which uniquely identifies a specific securities issue (International Securities Identification Number). For more information about ISIN code, see the international standard ISO 3166. | 0 If Not Available |
| 72 | SeriesStatus | Uint8 | 1 | The actual status of the series. | Olif Not Available Active (both expired and not expired) Suspended (temporarily stopped) Issued Delisted Locked (suspended for trading and post-trade operations) |
| 73 | EffectiveTomorrow | Uint8 | 1 | This declaration is for next day series | 0 False1 True |
| | | | | 301103 | 1 IIUC |

© Copyright 2020 HKEX 28/67

| Offset | Field | Format | Len | Description | Values |
|----------|----------------------|--------|-----|--|---|
| 74 | PriceQuotationFactor | Int32 | 4 | Implies the contracted value of the product / series | Decimal places determined from Class Definition field "DecimalInContractSize" |
| 78 | PriceMethod | Uint8 | 1 | Specifics the pricing method used for the combo series | 0 If Not Applicable1 Net Price2 Net Value |
| 79 | Filler | String | 1 | | |
| 80 | EffectiveExpDate | String | 8 | The effective expiration date is the actual expiration date of the series and will normally be the same as expiration_date_n in the series binary code. The effective expiration date can be changed during the lifetime of the series whereas expiration_date_n will continue to hold the original expiration date. | YYYYMMDD " " 8 blank spaces if not available |
| 88 | DateTimeLastTrading | Int64 | 8 | The last trading date/time of the Series in UTC timestamp (nanoseconds since 1970) precision to the nearest second | UTC Timestamp |
| 96 | DateTimeFirstTrading | Int64 | 8 | The first trading date/time of the Series in UTC timestamp (nanoseconds since 1970) precision to the nearest second For series with a non-zero value in this field, the series will not be tradable on the days before the Date in this field Time in this field can be ignored | 0 – Not Applicable UTC Timestamp |
| Total Le | enath | | 104 | Time in the hold can be ignored | |
| | | | | | |

3.7.5 Combination Definition (305)

Describes a combination orderbook.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|----------|------------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 305 Combination Definition |
| 4 | ComboOrderbookID | Uint32 | 4 | Numerical identifier of the combination order book | |
| 8 | LegOrderbookID | Uint32 | 4 | This is the orderbook identification number of the leg | |
| 12 | Filler | String | 3 | | |
| 15 | LegSide | String | 1 | Identifies whether the leg within the combination order book is the same side as that defined for the leg in the OrderBook definition Possible values: As Defined or Opposite | B As DefinedC Opposite |
| 16 | LegRatio | Int32 | 4 | Relative numbers of bid and ask contracts between the combo legs. | |
| Total Le | ngth | | 20 | | |

© Copyright 2020 HKEX 29/67

3.8 STATUS DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.8 | • | • | • | • |

3.8.1 Market Status (320)

Message Fields

| _ | | | | | |
|--------|----------------------|--------|-----|--|--|
| Offset | Field | Format | Len | Description | Values |
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 320 Market Status |
| 4 | StateLevel | Uint16 | 2 | Indicates the level which a state applies to | 1 Market 2 Instrument Type 3 Instrument Class 4 Instrument Series 5 Underlying * 99 End of Business Day |
| 6 | Market | Uint8 | 1 | Market Code Populated only if StateLevel = 1, 2 or 3 | See section 8.4 for a list of possible values o If Not Available |
| 7 | Instrument | Uint8 | 1 | Instrument Group Populated only if StateLevel = 2, 3 | See section 8.3 for a list of possible values Olf Not Available |
| 8 | OrderbookID | Uint32 | 4 | Orderbook ID Populated only if StateLevel = 4 | o If Not Available |
| 12 | CommodityCode | Uint16 | 2 | Commodity Populated only if StateLevel = 3 or 5 eg. 2005 (HKB). | 0 If Not Available |
| 14 | Filler | String | 2 | | |
| 16 | ActualStartDate | String | 8 | UTC Start Date | YYYYMMDD |
| 24 | ActualStartTime | String | 6 | UTC Start Time. If specified it is a warning and defines the next planned state. | HHMMSS |
| 30 | PlannedStartDate | String | 8 | UTC next planned Date. If specified it is a warning and defines the next planned state. If not specified it is a state change. | YYYYMMDD |
| 38 | PlannedStartTime | String | 6 | UTC next planned time. If specified it is a warning and defines the next planned state. If not specified it is a state change. | HHMMSS |
| 44 | SecondsToStateChange | Uint16 | 2 | Number of seconds to the next state change | o If Not Available |
| 46 | State | Uint16 | 2 | Numeric identification of the State Type. | See full list of states within section 8.1 If StateLevel is 4 O End of the Current State If StateLevel is 1, 2 or 3 O If Not Available |
| 48 | Priority | Uint8 | 1 | The priority of the State, either the Trading Session State or Instrument Session State. The State Priority is a number between 1-255. | o If Not Available |

© Copyright 2020 HKEX 30/67

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|-------------|--------|
| 49 | Filler | String | 3 | | |
| Total Len | Total Length | | | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

The Market Status (320) message can be used to derive the active state of a series. Readers should refer to the Developer's Guide for a fuller description.

3.8.2 **Series Status (321)**

The Series Status message is generated whenever there is a change to suspension indicator or series status, or when the date/time of last trading is changed.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|---------------------|--------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 321 Series Status |
| 4 | OrderbookID | Uint32 | 4 | Numerical identifier of the order book | |
| 8 | SuspensionIndicator | Uint8 | 1 | Indicates if the series is suspended or not. | 1 Suspended for trading2 Not suspended3 Locked (suspended for trading and post-trade operations) |
| 9 | SeriesStatus | Uint8 | 1 | The actual status of the series. | If Not Available Active (both expired and not expired) Suspended (temporarily stopped) Issued Delisted Locked (suspended for trading and post-trade operations) |
| 10 | Filler | String | 2 | | |
| Total Len | gth | | 12 | | |

3.8.3 Commodity Status (322)

The Commodity Status message is generated whenever a commodity status changes.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|---------------|--------|-----|--|----------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 322 Commodity Status |
| 4 | CommodityCode | Uint16 | 2 | Underlying definitions are defined by each exchange. Commodity Code is a part of the Series definition. eg. 2005 (HKB). | |
| 6 | Suspended | String | 1 | Defines if the commodity is suspended or not. | Y Yes N No |
| 7 | Locked | Uint8 | 1 | Specifics if the underlying is locked or not for post-trade operations | 1 Yes 2 No |
| Total Len | ath | | 8 | | |

© Copyright 2020 HKEX 31/67

3.9 ORDER BOOK DATA

The full order book information is not available in auction session until the completion of auction. However for DS and DP clients an uncrossed orderbook will continue to be sent during the pre-auction period – see section 3.9.5 for details.

3.9.1 Add Order (330)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.9.1 | (via D-Lite – Order Feed) | | | • |

For D-Lite - Order Feed

All outstanding orders of the VCM series will be transmitted through Add Order messages and the interval of this transmission is set at one second. The OrderbookID is unique per series but will not increment consecutively. Unique orders are identified by OrderBookID, Side and OrderID. The OrderBookPosition identifies the rank of an order when compared to other orders within the orderbook for each series.

For DF

The Add Order message is generated when a new order is inserted into the order book. The OrderbookID is unique per series but will not increment consecutively. Unique orders are identified by OrderBookID, Side and OrderID. The OrderBookPosition identifies the rank of an order when compared to other orders within the orderbook for each series.

Note that for series which have an auction session then DF clients will receive an **Orderbook Clear (335)** message followed by a large quantity of **Add Order (330)** messages representing the uncrossed book after the end of auction.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|-------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 330 Add Order |
| 4 | OrderbookID | Uint32 | 4 | Uniquely identifies a series available for trading | |
| 8 | OrderID | Uint64 | 8 | Unique identifier per series and side for each order performed within the trading system | Values may not be consecutive |
| 16 | Price | Int32 | 4 | Price | Decimal places determined from Series Definition Base field 'NumberOfDecimalsPrice' |
| 20 | Quantity | Uint32 | 4 | Number of contracts | |
| 24 | Side | Uint8 | 1 | Side of the order | 0 Bid 1 Offer |
| 25 | LotType | Uint8 | 1 | Lot Type | Lot Type. Values: 0 Undefined * 1 Odd Lot * 2 Round Lot 3 Block Lot * 4 All or None Lot * |
| 26 | OrderType | Uint16 | 2 | Order Type Bitmap | Additional order attributes. Values: O Not applicable Force * Short Sell * Market Bid * Price Stabilization * Override Crossing * Undisclosed * |

© Copyright 2020 HKEX 32/67

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------|--------|-----|---|--|
| | | | | | 1024 Fill-and-kill immediately * 2048 Firm color disabled * 4096 Convert to aggressive (if locked market)* 8192 Bait/implied order NOTE: Applicable types may be defined by the marketplace. NOTE 2: This field is a bit map. Multiple values may be set simultaneously. |
| 28 | OrderBookPosition | Uint32 | 4 | Order rank information for the order position within the order book for each series | Integer |
| Total Ler | ngth | | 32 | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

3.9.2 Modify Order (331)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.9.2 | | | | • |

The Modify Order message is generated when an existing order identified by the OrderID is modified. The attributes that can be modified are Position, Quantity, Price and OrderType.

In most cases, modification to an order will result in a Delete Order message followed by an Add Order message. Despite that, clients' application should have the ability to process Modify Order messages if received.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|--------------|--------|-----|--|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 331 Modify Order |
| 4 | Orderbook ID | Uint32 | 4 | Uniquely identifies a series available for trading | |
| 8 | OrderID | Uint64 | 8 | Unique identifier per series and side for each order performed within the trading system | Values may not be consecutive |
| 16 | Price | Int32 | 4 | Price | Decimal places determined from Series Definition Base field 'NumberOfDecimalsPrice' |
| 20 | Quantity | Uint32 | 4 | Number of contracts – the new quantity of the order | |
| 24 | Side | Uint8 | 1 | Side of the order | 0 Bid1 Offer |
| 25 | Filler | | 1 | | |
| 26 | OrderType | Uint16 | 2 | Order Type Bitmap | Additional order attributes. Values: 0 Not applicable 1 Force 2 Short Sell 4 Market Bid 8 Price Stabilization 16 Override Crossing 32 Undisclosed 1024 Fill-and-kill immediately 2048 Firm color disabled |

© Copyright 2020 HKEX 33/67

| Offset | Field | Format | Len | Description | Values |
|--------------|-------------------|--------|-----|---|---|
| | | | | | 4096 Convert to aggressive (if locked market) 8192 Bait/implied order NOTE: Applicable types may be defined by the marketplace. NOTE 2: This field is a bit map. Multiple values may be set simultaneously. |
| 28 | OrderBookPosition | Uint32 | 4 | Order rank information for the order position within the order book for each series | Integer |
| Total Length | | 32 | | | |

3.9.3 Delete Order (332)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.9.3 | | | | • |

The Delete Order message is generated when an existing order identified by the OrderBookID, OrderID and Side is deleted.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------------|-------------|--------|-----|--|------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 332 Delete Order |
| 4 | OrderbookID | Uint32 | 4 | Uniquely identifies a series available for trading | |
| 8 | OrderID | Uint64 | 8 | Unique identifier per series and side for each order performed within the trading system | |
| 16 | Side | Uint8 | 1 | Side of the order | 0 Bid 1 Offer |
| 17 | Filler | | 1 | | |
| Total Length | | 18 | | | |

3.9.4 Aggregate Order Book Update (353)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.9.4 | • | • | • | |

For D-Lite clients, the aggregate order book is sent whenever there is a orderbook change within the top 5 price levels.

For DS clients, the aggregate order book is sent whenever there is a orderbook change within the top 10 price levels. For DP clients then all orderbook changes will lead to a message being disseminated, either for the top 10 levels (like DS) or as an adjustment of the PriceLevel 255, which is a special price level used to display aggregated remaining liquidity beyond the 10th level.

© Copyright 2020 HKEX 34/67

For series with pre-auction periods the best bid and ask may both be equal to the calculated opening price or may be equal to Null if the book is uncrossed but with market orders present. See Examples 6 and 7 in Section 6 for details.

Refer to Section 6 - Aggregate Order Book Management for details on the Aggregate Order Book Update message.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 353 Aggregate Order Book Update |
| 4 | Orderbook ID | Uint32 | 4 | Uniquely identifies a series available for trading | |
| 8 | Filler | String | 3 | | |
| 11 | NoEntries | Uint8 | 1 | Number of book entries within the message | |
| 12 | AggregateQuantity | Uint64 | 8 | Aggregated number of shares. | |
| 20 | Price | Int32 | 4 | Price | Decimal places determined from Series Definition Base field 'NumberOfDecimalsPrice' |
| 24 | NumberOfOrders | Uint32 | 4 | Number of orders | |
| 28 | Side | Uint8 | 1 | Side of the order | 0 Bid1 Offer |
| 29 | Filler | | 1 | | |
| 30 | PriceLevel | Uint8 | 1 | Indicates the price level (within top 10) of the information carried in the messageor whether the message carries the aggregated figures for 11+ levels | 1 to 10 Level 2 Orderbook Liquidity 255 Aggregated Remaining Liquidity beyond the 10 th level – available for DP Clients |
| 31 | UpdateAction | Uint8 | 1 | Type of market data update action | NewChangeDeleteClear |
| 32 | Filler | String | 4 | | |
| Total Len | Total Length | | | | |

(no = value of NoEntries)

3.9.5 Orderbook Clear (335)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.9.5 | | | | • |

The Orderbook Clear message is used to inform clients that all existing orders should be removed from both the bid and ask sides of the specified orderbook. The message is typically used at the start and end of Auction;

At the end of Auction, DF clients will receive an **Orderbook Clear (335)** message followed by a large quantity of **Add Order (330)** messages representing the uncrossed book.

Clients should clear both bid and ask side orders for the specified orderbook.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|---------|--------|-----|---------------------|---------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 335 Orderbook Clear |

© Copyright 2020 HKEX 35/67

| Offset | Field | Format | Len | Description | Values |
|--------------|--------------|--------|-----|--|--------|
| 4 | Orderbook ID | Uint32 | 4 | Uniquely identifies a series available for trading | |
| Total Length | | | 8 | | |

3.9.6 **Quote Request (336)**

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.9.6 | • | • | • | • |

The Quote Request message is generated whenever market participants request a new quotation.

Clients should ignore the Quote Request message with zero OrderbookID or a negative value in NumberOfLots.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------------|--------------|--------|-----|--|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message. | 336 Quote Request |
| 4 | OrderbookID | Uint32 | 4 | Order book ID | |
| 8 | NumberOfLots | Int32 | 4 | Number of Lots | |
| 12 | BidAskFlag | Uint8 | 1 | Indicates if the quote request is for a Bid or Ask (or both) | 0 Bid1 Ask2 Bid and Ask |
| 13 | Filler | String | 3 | | |
| Total Length | | | 16 | | |

3.10 TRADE AND PRICE DATA

3.10.1 Trade (350)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.10.1 | (via Deriviatives Trade | (via Deriviatives Trade | • | • |

The Trade message is generated each time a trade has been performed.

The executions may be marked as non-printable. If a participant is looking to use the data in trade tickers or volume calculations, it is recommended that participants ignore messages marked as non-printable to prevent double counting.

- NOTE 1: Combination orders on the book that execute will always be represented by this message.
- NOTE 2: Combination orders that execute will have the Printable flag set to "N". The trades that occur in the legs of the Combo Series will be printable. This avoids double counting of the combination order and its leg trades. Leg trades will be published with the Trade message.

For DF clients; if the OrderID within the Trade (350) message is non-zero then users must reduce the resting order identified by the 'Quantity' within the Trade (350) message. If the outstanding quantity is zero the order must be deleted. DP clients will have the update managed for them and receive a new Aggregate Order Book Update (353) message accordingly.

© Copyright 2020 HKEX 36/67

Important messages: Clients who intend to calculate trade statistics based on Trade (350) and Trade Amendment (356) are advised NOT to compare their internally aggregated turnover with those carried in the Trade Statistics (360) and the Series Statistics (363) as they may not be synchronized given the former trade messages are disseminated on streaming basis whilst the latter statistics are published on snapshot basis. Please also note that price information (Open/High/Low/Last Price) provided in Trade Statistics (360) and Series Statistics (363) cannot be derived from Trade (350) and Trade Amendment (356). For information only, the price information excludes (i) Reported Trade (DealType = 4 or above); and (ii) Leg Trades from Combo versus Combo Trades (where OrderID being zero and not "Occurred at Cross" (i.e. DealType not = 2 or 3). However, it is important to note that the stated behavior is not exclusive to Leg Trades from Combo versus Combo Trades and thus cannot be used to differentiate such Leg Trades).

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|----------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 350 Trade |
| 4 | OrderbookID | Uint32 | 4 | Orderbook ID | |
| 8 | OrderID | Uint64 | 8 | Order ID | If Not Available |
| 16 | Price | Int32 | 4 | Traded Price | Decimal places determined from Series Definition Base field 'NumberOfDecimalsPrice' Null means N/A |
| 20 | TradeID | Uint64 | 8 | Match ID | |
| 28 | ComboGroupID | Uint32 | 4 | Used to group combo and leg executions together | |
| 32 | Side | Uint8 | 1 | Side of Orderbook ID | Not AvailableNot Defined *Buy OrderSell Order |
| 33 | DealType | Uint8 | 1 | Deal Type Bitmap | NonePrintable (see note)Occurred at CrossReported Trade |
| 34 | TradeCondition | Uint16 | 2 | The condition in which a trade was executed. Field is a Bitmap. | None Late Trade * Internal Trade / Crossing Buy Write * Off Market * |
| 36 | DealInfo | Uint16 | 2 | Information Bitmap of a deal. | NoneReported Trade |
| 38 | Filler | String | 2 | | |
| 40 | Quantity | Uint64 | 8 | The quantity being matched in this execution. | |
| 48 | TradeTime | Uint64 | 8 | Date and time of the last trade in UTC timestamp (nanoseconds since 1970) precision to the nearest 1/100th second | UTC Timestamp |
| Total Len | Total Length | | 56 | | |

Remark *: denotes that the value is not currently in use for existing products. However, please note that HKEX may use the value anytime when introducing new products

Note: The Printable property does not apply to Reported Trade. For other trades, i.e. trades matched by the trading system, it will be OFF for trades on Combo Series to avoid double counting of the trade quantity to market turnover.

3.10.2 Trade Amendment (356)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| The information supplied in this section and its sub-sections applies to the bataleed(s) marked with [•] | | | | | | | | | | |
|--|------------------|----------------------|---------------------|----------------------|--|--|--|--|--|--|
| Section | Derivatives Lite | Derivatives Standard | Derivatives Premium | Derivatives FullTick | | | | | | |
| | (D-Lite) | (DS) | (DP) | (DF) | | | | | | |

© Copyright 2020 HKEX 37/67

| 3.10.2 | A | | • | • |
|--------|-------------------------|-------------------------|---|---|
| | (via Deriviatives Trade | (via Deriviatives Trade | | |

Represents a trade amendment or cancellation.

Notes:

- If a traded quantity is reduced then a Trade Amendment (356) delete ("TradeState" = 3) will be sent followed by a rectification ("TradeState" = 2).
- Price and Quantity may not be available for cancelled trades which have already been given up ("TradeState" = 1) and in such cases the Price and Quantity will be NULL and 0 respectively. Please ignore these values.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|--------------|--------|-----|---|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 356 Trade Amendment |
| 4 | TradeID | Uint64 | 8 | Match ID | |
| 12 | ComboGroupID | Uint32 | 4 | Used to group combo and leg executions together | |
| 16 | Price | Int32 | 4 | Traded Price | Decimal places determined from Class Definition field 'DecimalInPremium' "NULL" means not available |
| 20 | Quantity | Uint64 | 8 | Defines number of contracts in a deal. | "0" means not available if <i>Price</i> is "NULL" |
| 28 | TradeTime | Uint64 | 8 | Date and time of the last trade in UTC timestamp (nanoseconds since 1970) precision to the nearest 1/100th second | UTC Timestamp |
| 36 | TradeState | Uint8 | 1 | Trade State | Deleted (with given up trade). The trade has been deleted. Rectified. The trade has been rectified. Deleted (Normal). The trade has been deleted. |
| 37 | Filler | | 3 | | |
| Total Len | gth | | 40 | | |

3.10.3 Trade Statistics (360)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.10.3 | • | • | | |

Trade information for completed deals. The trade information or statistics information carried in this message type is provided on snapshot basis.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|-------------|--------|-----|--------------------------------|--|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 360 Trade Statistics |
| 4 | OrderbookID | Uint32 | 4 | Uniquely identifies the series | |
| 8 | Price | Int32 | 4 | Last Traded Price | Decimal places determined from Class Definition field 'DecimalInPremium' |

© Copyright 2020 HKEX 38/67

| Offset | Field | Format | Len | Description | Values |
|-----------|-------------------|--------|-----|---|--|
| 12 | DealSource | Uint8 | 1 | Deal Source of the last trade | See full list of deal sources at the end of this document Deal Source in Trade Statistics is only applicable to cases where Turnover is higher than that in the previous Trade Statistics for the same series, and should be ignored otherwise. |
| 13 | Session | Uint8 | 1 | Session indicator used to distinguish between the T and T+1 sessions | O Statistics for T Session1 Statistics for T+1 Session |
| 14 | Filler | | 2 | | |
| 16 | AggregateQuantity | Int64 | 8 | Volume – total within the latest deal(s) | |
| 24 | Open | Int32 | 4 | Price of the first committed Trade in the series during the repective Session | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 28 | High | Int32 | 4 | Highest price of normal trades in the session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account. | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 32 | Low | Int32 | 4 | Lowest price of normal trades in the session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account. | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 36 | Filler | | 4 | | |
| 40 | TradeReportVolume | Uint64 | 8 | Total volume of reported trades for the respective Session | |
| 48 | DealCount | Uint32 | 4 | Number of deals completed in the respective Session | |
| 52 | Turnover | Uint64 | 8 | Cumulative volume for the respective Session | |
| Total Len | ngth | | 60 | | |

3.10.4 Series Statistics (363)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.10.4 | | | • | |

Provides series information including high, low and open prices. The trade information or statistics information carried in this message type is provided on snapshot basis.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------|-------------|--------|-----|--------------------------------|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 363 Series Statistics |
| 4 | OrderbookID | Uint32 | 4 | Uniquely identifies the series | |
| 8 | Session | Uint8 | 1 | Session | O Statistics for T Session1 Statistics for T+1 Session |
| 9 | Filler | | 3 | | |

© Copyright 2020 HKEX 39/67

| Offset | Field | Format | Len | Description | Values |
|--------------|-------------------|--------|-----|--|--|
| 12 | Open | Int32 | 4 | Price of the first committed Trade in the series during the respective Session | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 16 | High | Int32 | 4 | Highest price paid for the series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 20 | Low | Int32 | 4 | Lowest price paid for the series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 24 | TradeReportVolume | Uint64 | 8 | Total volume of reported trades for the respective Session | |
| 32 | DealCount | Uint32 | 4 | Number of deals for the series – cumulative for the respective Session | |
| 36 | Price | Int32 | 4 | Last Traded Price | Decimal places determined from Class Definition field 'DecimalInPremium' |
| 40 | Turnover | Uint64 | 8 | Cumulative volume for the respective Session | |
| Total Length | | | 48 | | |

3.10.5 Calculated Opening Price (364)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.10.5 | • | • | • | • |

The Calculated Opening Price (COP) message indicates an instrument's theoretical opening price during the pre-opening phases of the market (prior to an auction). A COP message is generated when the indicative matching price or volume varies. If the Price set to Null, the COP is no longer applicable.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|-----------|------------------------|--------|-----|-------------------------------------|---|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 364 Calculated Opening Price |
| 4 | OrderbookID | Uint32 | 4 | Order book ID | |
| 8 | CalculatedOpeningPrice | Int32 | 4 | Calculated Opening Price | Decimal places determined from Series Definition Base field 'NumberOfDecimalsPrice' |
| 12 | Filler | | 4 | | |
| 16 | Quantity | Uint64 | 8 | Shows the quantity available at COP | |
| Total Ler | Total Length | | 24 | | |

© Copyright 2020 HKEX 40/67

3.11 **News**

3.11.1 Market Alert (323)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 3.11.1 | • | • | • | • |

The Market Alert message is generated periodically to relay market announcements and alerts. The "AlertID" and "Source" fields provide a unique key for any given announcement. "Source" field indicates the origin of the alert message. For each "Source", "AlertID" is unique on every business day.

If the size of a single announcement is greater than the maximum supported packet size, then the alert will be sent as multiple messages, each with the same 'AlertID'. These Market Alert (323) messages are disseminated sequentially each with the "LastFragment" field set to "N" except the last message within the alert which has the 'LastFragment' field set to 'Y'. Note that in this case the Header field would be the same for all messages within this announcement.

Message Fields

| Offset | Field | Format | Lon | Description | Values |
|--------------|--------------|--------|--------------------|--|---|
| Oliset | rielu | Format | Len | Description | values |
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 323 Market Alert |
| 4 | AlertID | Uint16 | 2 | The reference ID for this alert, unique for any given day | |
| 6 | Source | String | 1 | Source ID for this alert message | Market Alerts sent through theTrading SystemOther Market Alerts |
| 7 | Filler | String | 1 | | |
| 8 | Header | Binary | 320 | Header. In the case of multiple fragments, this field is only populated in the first fragment. | Unicode UTF-16LE encoded If Header starts with [C], the Market Alert is in Chinese. Otherwise, it is in English. |
| 328 | LastFragment | String | 1 | Indicates whether this message is the last in a sequence of messages. | Y Complete N Not complete |
| 329 | InfoType | Uint8 | 1 | Information Type | Not Specified Company Announcement Market Message Static Line Notice Received |
| 330 | Priority | Uint8 | 1 | Priority | Not Specified Low priority Medium priority High priority Critical priority |
| 331 | NoLines | Uint8 | 1 | Maximum 3 lines | |
| 332 | Content | Binary | 320 | Market Alert Content – number of occurrences according to 'NoLines' field | Unicode UTF-16LE encoded The language will be either English or Chinese |
| Total Length | | 332 + | 320 n _p | | |

 $(n_p = value of NoLines)$

3.12 CLEARING INFORMATION

The trading system disseminates clearing related information.

© Copyright 2020 HKEX 41/67

3.12.1 Open Interest (366)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.12.1 | • | • | • | |

Typically issued at start of day to show the Previous Day settlement price and open interest (for products not tradable in After-Hours Trading session) information. It is also issued around the end of day with the Current Day information. In the event of corrections, this message will be resent.

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------------|--------------|--------|-----|--|--|
| | | | | | |
| 0 | MsgSize | Uint16 | 2 | Size of the message | ass Ones latered |
| 2 | MsgType | Uint16 | 2 | Type of message | 366 Open Interest |
| 4 | DayIndicator | Uint16 | 2 | Session indicator used to distinguish between the previous and current business days for Settlement, GrossOI and NetOI* | O Current Business Day1 Previous Business Day |
| 6 | Filler | | 6 | | |
| 12 | OrderbookID | Uint32 | 4 | Uniquely identifies the series | |
| 16 | Settlement | int32 | 4 | If DayIndicator = 1, Settlement Price determined after the T session of the previous business day if DayIndicator = 0, Settlement Price determined after the T session of the current business day | Decimal places determined from Class Definition field 'DecimalInPremium' "NULL" means not available |
| 20 | DealCount | Uint32 | 4 | Deal Count of the current business day up to the close of the T session | |
| 24 | GrossOl | int32 | 4 | If DayIndicator = 1, Gross Open Interest right before the start of the current business day if DayIndicator = 0, Gross Open Interest up to the close of the T session of the current business day | "NULL" means not available |
| 28 | NetOI | int32 | 4 | If DayIndicator =1, Net Open Interest right before the start of the current business day If DayIndicator = 0, Net Open Interest up to the close of the T session of the current business day | "NULL" means not available |
| 32 | Turnover | Uint64 | 8 | Turnover of the current business day up to the close of the T session | |
| Total Length | | | 40 | | |

^{*} A business day starts when the market opens in the morning and ends at the close of the after hour trading session of the day.

3.12.2 Implied Volatility (367)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|---------------------------|--------------------------|------------------------------|
| 3.12.2 | | | • | |

© Copyright 2020 HKEX 42/67

Message Fields

| Offset | Field | Format | Len | Description | Values |
|--------------|-------------------|--------|-----|--------------------------------|--------------------------|
| 0 | MsgSize | Uint16 | 2 | Size of the message | |
| 2 | MsgType | Uint16 | 2 | Type of message | 367 Implied Volatility |
| 4 | OrderbookID | Uint32 | 4 | Uniquely identifies the series | |
| 8 | ImpliedVolatility | Uint32 | 4 | Implied Volatility | 4 implied decimal places |
| Total Length | | | 12 | | |

© Copyright 2020 HKEX 43/67

4. RECOVERY

OMD provides three different mechanisms for recovering missed data:

Line arbitration – using dual multicast channels (Line A and Line B) Retransmission Server – recovery of a limited number of messages Refresh Server – snapshot of current market state

These mechanisms should be used as described in the following table.

Table 2: Recovery Mechanisms

| Event | Action |
|---|--|
| Packet lost on one either Line A or Line B | Try to recover data from the other line with a configurable timeout ("arbitration mechanism"). |
| Dropped packet(s) on both Line A and Line B | Recover dropped message(s) from the Retransmission Server. |
| Late start up or extended intraday outage | Wait for a refresh of the current market state and then continue with real time messages. |

4.1 GAP DETECTION

Each packet provides the sequence number (SN) of the first message it contains. This sequence number starts at 1 and increases with each subsequent message.

The sequence numbers provided in every packet header is calculated by adding the previous sequence number and the message count, as shown in table below:

Table 3: Sequence Number Calculation

| Packet | Sequence Number | Message Count |
|----------|-----------------|---------------|
| Packet 1 | 1 | 4 |
| Packet 2 | 5 | 2 |
| Packet 3 | 7 | 1 |
| Packet 4 | 8 | 3 |
| Packet 5 | 11 | 1 |

If the client drops the first five packets they would request a gap fill for messages 1-11.

All messages conform to the message level sequencing. Each channel has its own sequence number. This allows recipients to detect gaps or duplicates in each message sequence number and, if appropriate, reconcile them (line arbitration) with the primary or secondary multicast groups or request retransmission of the missing / corrupted messages.

Users should use this sequence number to detect gaps in the transmission of messages.

The following diagram illustrates how the message sequence number should be used to detect gaps in the feed.

© Copyright 2020 HKEX 44/67

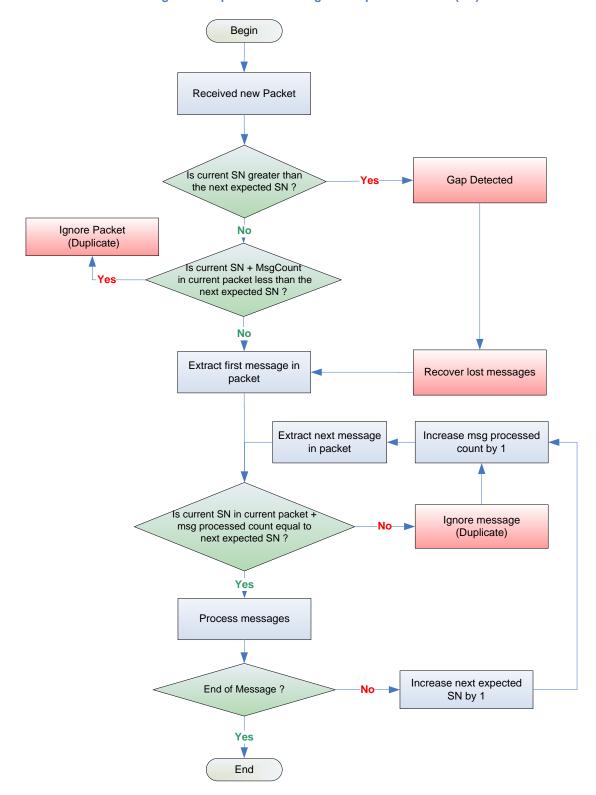


Figure 2: Gap Detection using the Sequence Number (SN)

4.2 LINE ARBITRATION

Client applications should check the sequence number (SN) and message count (MC) for every packet received. SNs are unique and increase monotonically for each service, the MC indicates the number of messages within each packet.

Line A and Line B are identical in terms of:

© Copyright 2020 HKEX 45/67

- SNs
- · Messages that are sent
- · Sequence in which messages are sent

However it is not guaranteed that a packet content between Line A and Line B will be the same. For example the third packet of the day from the Line A could contain SN 10 with MC 3, where as the third packet of the day from Line B could contain SN 9 with MC 4. For this reason clients must arbitrate on SN (at the message level) rather than packet content. Client applications should listen to both Line A and Line B in real-time. Clients should look at packets coming from both lines and process the ones that arrive first, regardless of whether they came from Line A or Line B. It is advisable to apply the "first come – first served" rule.




Figure 3 – Detecting Missing Packets

Additional Notes;

- The above example of a dropped packet is a simplified example assuming 1 message per packet, in reality each packet is likely to contain multiple messages
- Whilst the order of individual messages between Line A and Line B will be identical, there is no guarantee that the packets will contain exactly the same messages.
- In the example below, three packets are sent on each line, but message 'OrderUpdate3' appears in one packet from Line A but in the subsequent packet on Line B.

| Primary | | | | |
|--|----|-----|--|--|
| Messages | MC | SN | | |
| OrderUpdate1 OrderUpdate2 OrderUpdate3 | 3 | 101 | | |
| Trade1 OrderUpdate4 | 2 | 104 | | |
| Trade2 Statistics1 | 2 | 106 | | |

Figure 4 - Normal Message Delivery

| Secondary | | | |
|-----------|----|--|--|
| SN | MC | Messages | |
| 101 | 2 | OrderUpdate1 OrderUpdate2 | |
| 103 | 3 | OrderUpdate3 Trade1 OrderUpdate4 | |
| 106 | 2 | Trade2 Statistics1 | |

4.3 RETRANSMISSION SERVICE

The retransmission service is provided via the TCP/IP protocol and is designed to allow clients to recapture a small number of missed messages already published on the real time channels.

It is not intended that clients use the retransmission server to recover data after long outages or on late start up (in these situations, clients should use the Refresh service). To that end, it aims to support the retransmission of the data covering the market activities for the last 15-30 seconds only. This figure is indicative only and may be shorter than 15 seconds if a spike happens in the market. The sequence range of messages that a client can request and the number of retransmission requests permitted per day is also limited.

The following diagram illustrates the message flow during a retransmission session:

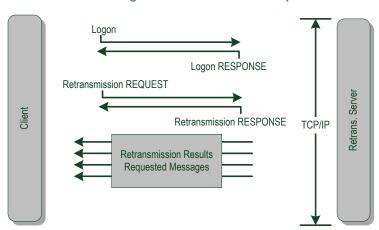


Figure 5: Retransmission Request

Logon

The client establishes a TCP/IP connection and initiates a session by sending the Logon message. Once the client is authenticated the server will respond immediately with the Logon Response message. If the client does not send a Logon message within the logon timeout interval, the server will close the connection.

Logons may be rejected for the following reasons:

- Invalid username
- User already connected

In all cases the server will close the connection after sending the Logon Response message.

Making a request

The client can make a retransmission request by sending the Retrans Request message. The server will respond with a Retrans Response message to indicate whether the request has been accepted or not.

In the case of a successful request the server will send the requested messages immediately after the Retrans Response message.

The sequence numbers will be the same as when they were first sent on the real time multicast channel. The framing of the retransmitted messages into a packet may differ from the original transmission.

Retransmission requests may be rejected for the following reasons:

Unknown channel ID or illegal (not authorized) Messages not available

© Copyright 2020 HKEX 47/67

Exceeds maximum sequence range Exceeds maximum requests in a day

In the case where the client has exceeded the maximum number of requests allowed in a day, the server will close the connection after sending the Retrans Response message.

The following diagram is a guideline of the flow of logic when making a request:

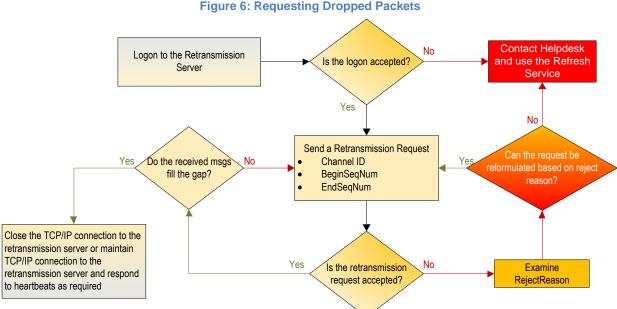


Figure 6: Requesting Dropped Packets

Multiple requests and concurrent sessions

Clients can send multiple requests during a session and can keep the session open during idle periods by responding to heartbeats sent by the server. Concurrent sessions however will not be supported. Each user can only have one session open at a time.

If a client makes multiple requests, the server will process them serially. Clients are unable to cancel outstanding requests.

Heartbeats

To determine the health of the user connection on the TCP/IP channel, the Retransmission Server will send regular heartbeat packets to the user. The heartbeat frequency is 30 seconds. The client application must respond with a "Heartbeat Response" packet. The time out for this heartbeat response packet is set at 5 seconds. If no response is received by the server within this timeframe, the TCP/IP session will be disconnected.

User TCP/IP Heartbeat Response

Figure 7: Retransmission Server Heartbeat Message

A "heartbeat response" packet consists in an exact copy of the incoming heartbeat packet.

Closing the session

Sessions should be terminated by gracefully closing the TCP/IP connection.

© Copyright 2020 HKEX 48/67

System limits

The system limits mentioned above are set as follows:

| System Limit | Value |
|--|--------|
| Maximum sequence range that can be requested | 10,000 |
| Maximum number of requests per day | 1,000 |
| Logon timeout (seconds) | 5 |
| Heartbeat interval (seconds) | 30 |
| Heartbeat response timeout (seconds) | 5 |

Please note that the maximum number of requests per day limit is across all channels.

High availability

For each site, two sets of IP address and port are provided for the retransmission service in order to facilitate high availability. Clients may connect to both retransmission servers at the start of the day and maintain the connection during the day by responding to heartbeats.

In the event that Retransmission Server A (RTS A) does not respond to a logon or retransmission request, Retransmission Server B (RTS B) should be used.

In the event of a failure of either RTS A or RTS B, there may be a short period of unavailability. This failure should be detected by clients through the loss of connection. In this case the other RTS should be used.

RTS B should not be used as a means of requesting from two sources at the same time.

Disaster recovery

Two sets of backup IP address and port are also provided for the disaster site's retransmission service.

During normal conditions the retransmission service at the disaster site is not available. If clients attempt to connect, this will fail.

In the unlikely event of a disaster recovery situation, the retransmission service at the disaster site will be brought up and clients may connect via the backup IP addresses and ports.

4.4 REFRESH SERVICE

The refresh service is designed to allow clients to recover from a large scale data loss. This can happen after a late start or during a major outage.

Synchronization is on a per channel basis. For each real time multicast channel (besides those for Trade, Trade Amendment & Quote Request which are not recoverable via the Refresh service), there exists a corresponding refresh multicast channel on which snapshots of the market state are sent at regular intervals throughout the business day. No ordering should be assumed between the various dfferent data types unless otherwise stated – this is due to the nature of using multiple different multicast channels for refresh.

Snapshot

A snapshot of the market state is described in the table below.

© Copyright 2020 HKEX 49/67

| Message | Snapshot description |
|--------------------------------------|--|
| Series Definition | A full list of all series, which includes any series modifications or series additions made intraday. The order is sent as: |
| | Commodity Definition (301) Class Definition (302) Series Definition Base (303) Series Definition Extended (304) |
| | Combination Definition (305) |
| | NOTE: Next day series are not currently included in Refresh |
| | NOTE: Within the Refresh Service the Commodity Definition (301), Class Definition (302) and Series Definition Extended (304) are sent on a dedicated multicast channel and arrive in that order. Similarly the Series Definition Base (303) and Combination Definition (305) are sent on a dedicated multicast channel and arrive in that order. |
| Market Status | The most recent Market Status message(s) – see section 3.8.1 for details about interpreting market state |
| Series Status | The most recent Series Status message(s) for each series |
| Commodity Status | The most recent Commodity Status message(s) for each commodity |
| Orders | For D-Lite, DS and DP clients: the latest level 2 orderbook via Aggregate Order Book messages |
| | For DF clients : The full order book provided via Add Order messages |
| Trade Statistics & Series Statistics | The latest Trade Statistics and Series Statistics messages for each series in the T and T+1 sessions |
| | NOTE: T+1 may not be available for all series and in any event would not be available until after the T+1 session has begun |
| COP | The latest Calculated Opening Price message for each series |
| Market Alert | The most recent 400 Market Alert messages |
| Open Interest | Potentially up to 2 latest Open Interest message for each series – one for the Current Trading Day, and one for the Previous Trading Day |
| Implied Volatility | The latest Implied Volatility message for each series |

The ordering of refresh messages types within the multicast channels is detailed below;

| Channel | Refresh Sequence |
|--------------------|--|
| Static Base | Series Definition Base (303), Combination Definition (305) |
| Order (DF) | Calculated Opening Price (364), Add Order (330) |
| Order (DP) | Calculated Opening Price (364), Aggregate Order Book Update (353) |
| Order (DS) | Calculated Opening Price (364), Aggregate Order Book Update (353) |
| Static Extended | Commodity Definition (301), Class Definition (302), Series Definition Extended (304) |
| Series Status | Market Status (320), Commodity Status (322), Series Status (321) |
| Trade Statistics | Trade Statistics (360) |
| Series Statistics | Series Statistics (363) |
| Market Alert | Market Alert (323) |
| Open Interest | Open Interest (366) |
| Implied Volatility | Implied Volatility (367) |

Refresh complete

A Refresh Complete message is sent at the end of a snapshot indicating the sequence number with which the snapshot is synchronized.

Snapshot processing

Below is an overview of the steps to carry out in order to process a channel snapshot.

• Subscribe to the real time multicast channel and cache received messages.

© Copyright 2020 HKEX 50/67

- Subscribe to the corresponding refresh multicast channel and discard messages until the Refresh Complete message is received.
- Process received messages until the next Refresh Complete message is received.
- Store the LastSeqNum sequence number provided in the Refresh Complete.
- Unsubscribe to the refresh multicast channel.
- Discard the cached real time messages with sequence number less than or equal to LastSeqNum.
- Process the remaining cached real-time messages and resume normal processing.

Missed messages

The retransmission server does not support refresh channels. If a client misses messages, it must wait for the next snapshot. Similarly if a client starts listening during the middle of a snapshot, it must wait for the next snapshot.

4.4.1 Refresh of Market Status

Many of the messages within refresh are singular per series and the refresh server simply published the most recent value. However the refresh data will typically include a number of Market Status (320) messages will be sent together and correct processing users should refer the description given in Section 3.8.1 to determine the correct Trading and Instrument Session State.

© Copyright 2020 HKEX 51/67

5. FULLTICK ORDERBOOK MANAGEMENT

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [.]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 5 | (via D-Lite – Order Feed) | | | • |

The information needed to build an order book view from the message flow is contained within the following messages:

- Add Order (330)
- Modify Order (331)
- Delete Order (332)

Orders shall be ranked by:

Order Book Position. 1 denotes the highest ranked order. For an Modify Order (331), the order must be removed
from its previous position and inserted at new OrderBookPosition. An order inserted at an existing position shifts
the order on that position down (and all orders below as well. A deleted or fully filled order causes existing orders
below it to shift their position up one step to fill the "void".

The Modify Order (331) message signals that the order has been modified. The current rank may or may not be lost in the process OrderBookPosition field will show the new rank within the book.

The Order Delete (332) message tells the recipient to remove the order referenced.

D-Lite Order Feed only disseminates Add Order (330) message for all outstanding orders of VCM series on a snapshot basis and refreshes every second.

AGGREGATE ORDER BOOK MANAGEMENT

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [•]

| Section | Derivatives Lite (D-Lite) | Derivatives Standard (DS) | Derivatives Premium (DP) | Derivatives FullTick (DF) |
|---------|------------------------------|------------------------------|--------------------------|------------------------------|
| 6 | • | • | • | |

Book Identification

A book is uniquely identified by either OrderbookID or Symbol and there is a 1-to-1 map between these two identifiers. OrderbookID is an integer representation of 4 bytes, Symbol is a longer String representation (32 bytes) that gives the short name. Whilst Symbol is 'readable' to human users, the OrderbookID is more efficient when sending market data updates, and therefore OrderbookID is the identifier that appears on every series related message.

Partial Price Depth

The price level within the Aggregate Order Book Update message determines the number of price levels the order price is away from the best price for a given order book. An order with price level 1 means the order's price is the best price, a price level of 2 will be used for orders at the next best price, etc.

Different datafeeds in OMD provide a different view of multiple price depths of aggregate order book for the Derivatives Market. D-Lite provides 5 price depths of aggregate order book while DS and DP provide 10 price depths (10+1 for DP). This view can be visualized as a number of rows in a table for each of the bid and ask sides. On each side there are a number of rows showing the aggregate quantity available at a number of price levels.

| | Bid Side | | | Ask Side | |
|------------|-------------------|-------|-------|-------------------|------------|
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 700 | 9730 | 9760 | 500 | 1 |
| 2 | 350 | 9720 | 9770 | 300 | 2 |
| 3 | 150 | 9710 | 9780 | 100 | 3 |
| 4 | 250 | 9700 | 9790 | 150 | 4 |
| 5 | 100 | 9690 | | | |
| 6 | 150 | 9680 | | | |
| 7 | 50 | 9670 | | | |
| 8 | 200 | 9660 | | | |
| 9 | 100 | 9650 | | | |

Book Updates

Book update messages are generated by OMD as delta messages defined in section 6 (**Aggregate Order Book Update (353)**). Each message may contain any combination of new, changed, deleted or orderbook clear entries for a book. The nature of an entry is defined by its UpdateAction.

New, to create/insert a new price level

Delete, to remove a price level

Change, to update aggregate quantity at a price level

Orderbook Clear, to inform users that all price levels should be cleared

Example 1 – Quantity Reduction and Explicit Addition

For example suppose the Ask order at price level 9770 is reduced in quantity and at the same time a new order is added at price level 9850, then the following message is sent;

| D-Lite, | DS and DP | |
|---------|------------|-------|
| Offset | Field Name | Value |

| 0 | MsgSize | 60 | |
|----|-------------------|-----------|--|
| 2 | MsgType | 53 | |
| 4 | OrderbookID | 1234 | |
| 8 | Filler | NULL | |
| 11 | NoEntries | 2 | |
| 12 | AggregateQuantity | 200 | |
| 20 | Price | 9770 | |
| 24 | NumberOfOrders | 1 | |
| 28 | Side | 1 (Offer) | |
| 30 | PriceLevel | 2 | |
| 31 | UpdateAction | 1 | |
| 32 | Filler | NULL | |
| 36 | AggregateQuantity | 300 | |
| 44 | Price | 9850 | |
| 48 | NumberOfOrders | 1 | |
| 52 | Side | 1 (Offer) | |
| 54 | PriceLevel | 5 | |
| 55 | UpdateAction | 0 | |
| 56 | Filler | NULL | |

The resulting book should now be as follows:

| D-Lite | | | | | |
|------------|-------------------|-------|-------|-------------------|------------|
| | Bid Side | | | Ask Side | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 700 | 9730 | 9760 | 500 | 1 |
| 2 | 350 | 9720 | 9770 | 200 | 2 |
| 3 | 150 | 9710 | 9780 | 100 | 3 |
| 4 | 250 | 9700 | 9790 | 150 | 4 |
| 5 | 100 | 9690 | 9850 | 300 | 5 |

| DS and DP | | | | | |
|------------|-------------------|-------|-------|-------------------|------------|
| | Bid Side | | | Ask Side | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 700 | 9730 | 9760 | 500 | 1 |
| 2 | 350 | 9720 | 9770 | 200 | 2 |
| 3 | 150 | 9710 | 9780 | 100 | 3 |
| 4 | 250 | 9700 | 9790 | 150 | 4 |
| 5 | 100 | 9690 | 9850 | 300 | 5 |
| 6 | 150 | 9680 | | | |
| 7 | 50 | 9670 | | | |
| 8 | 200 | 9660 | | | |
| 9 | 100 | 9650 | | | |

Example 2 – Implicit Level Adjustments

The client must adjust the price level of entries below deleted or inserted entries. Potential level adjustments must be carried out after each single entry in Aggregate Order Book message.

For example, if a bid order with price 9740 and quantity 50 is added to the order book above, it will cause the following message to be sent:

| D-Lite, | DS and DP | |
|---------|-------------------|---------|
| Offset | Field Name | Value |
| 0 | MsgSize | 36 |
| 2 | MsgType | 53 |
| 4 | OrderbookID | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 1 |
| 12 | AggregateQuantity | 50 |
| 20 | Price | 9740 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |
| 31 | UpdateAction | 0 |
| 32 | Filler | NULL |

After processing this message, the client's book should look as follows:

| D-Lite | | | | | |
|------------|-------------------|-------|-------|-------------------|------------|
| | Bid Side | | | Ask Side | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 50 | 9740 | 9760 | 500 | 1 |
| 2 | 700 | 9730 | 9770 | 200 | 2 |
| 3 | 350 | 9720 | 9780 | 100 | 3 |
| 4 | 150 | 9710 | 9790 | 150 | 4 |
| 5 | 250 | 9700 | 9850 | 300 | 5 |

Price levels of the other 4 Bid orders must all be incremented although there will not be Aggregate Order Book Update messages sent for the increment.

| DS and DP | | | | | |
|------------|-------------------|-------|-------|-------------------|------------|
| | Bid Side | | | Ask Side | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 50 | 9740 | 9760 | 500 | 1 |
| 2 | 700 | 9730 | 9770 | 200 | 2 |
| 3 | 350 | 9720 | 9780 | 100 | 3 |
| 4 | 150 | 9710 | 9790 | 150 | 4 |
| 5 | 250 | 9700 | 9850 | 300 | 5 |
| 6 | 100 | 9690 | | | |
| 7 | 150 | 9680 | | | |
| 8 | 50 | 9670 | | | |
| 9 | 200 | 9660 | | | |
| 10 | 100 | 9650 | | | |

Price levels of the other 9 Bid orders must all be incremented although there will not be Aggregate Order Book Update messages sent for the increment.

Example 3 – Implicit Deletions

For DP clients, implicit deletions are relevant, but notice also that the aggregated 11th price level will also be adjusted – see example 5 below for details.

If a new book entry causes the bottom entry of a book to be shifted out of the book (i.e. more than 4 price levels away from the best price for D-Lite wheareas more than 9 price levels away from the best price for DS and DP), the client must delete the excess entry. If the book shrinks again, OMD resends the entries that have temporarily fallen out.

For example, if a bid order with price 9750 and quantity 250 is added to the book above, and the bid quantity at price 9660 is reduced from 200 to 150, it will cause the following message to be sent:

| | D-Lite | | |
|---|--------|-------------------|---------|
| | Offset | Field Name | Value |
| | 0 | MsgSize | 60 |
| | 2 | MsgType | 53 |
| | 4 | OrderbookID | 1234 |
| | 8 | Filler | NULL |
| | 11 | NoEntries | 1 |
| | 12 | AggregateQuantity | 250 |
| L | 20 | Price | 9750 |
| L | 24 | NumberOfOrders | 1 |
| L | 28 | Side | 0 (Bid) |
| | 30 | PriceLevel | 1 |
| | 31 | UpdateAction | 0 |
| | 32 | Filler | NULL |

After processing this message, the client's book should look as follows:

| D-Lite | | | | | | |
|------------|-------------------|-------|-------|-------------------|------------|--|
| Bid Side | | | | Ask Side | | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | |
| 1 | 250 | 9750 | 9760 | 500 | 1 | |
| 2 | 50 | 9740 | 9770 | 200 | 2 | |
| 3 | 700 | 9730 | 9780 | 100 | 3 | |
| 4 | 350 | 9720 | 9790 | 150 | 4 | |
| 5 | 150 | 9710 | 9850 | 300 | 5 | |

Price 9750 and quantity 250 is added according to the message. Price 9700 and quantity 250 must be deleted by the client.

| DS and | DS and DP | | | | | | | |
|--------|-------------------|---------|--|--|--|--|--|--|
| Offset | Field Name | Value | | | | | | |
| 0 | MsgSize | 60 | | | | | | |
| 2 | MsgType | 53 | | | | | | |
| 4 | OrderbookID | 1234 | | | | | | |
| 8 | Filler | NULL | | | | | | |
| 11 | NoEntries | 2 | | | | | | |
| 12 | AggregateQuantity | 250 | | | | | | |
| 20 | Price | 9750 | | | | | | |
| 24 | NumberOfOrders | 1 | | | | | | |
| 28 | Side | 0 (Bid) | | | | | | |
| 30 | PriceLevel | 1 | | | | | | |
| 31 | UpdateAction | 0 | | | | | | |
| 32 | Filler | NULL | | | | | | |
| 36 | AggregateQuantity | 150 | | | | | | |
| 44 | Price | 9660 | | | | | | |
| 48 | NumberOfOrders | 1 | | | | | | |
| 52 | Side | 0 (Bid) | | | | | | |
| 54 | PriceLevel | 10 | | | | | | |
| 55 | UpdateAction | 1 | | | | | | |
| 56 | Filler | NULL | | | | | | |

After processing this message, the client's book should look as follows:

| DS and DP | | | | | |
|------------|-------------------|-------|----------|-------------------|------------|
| Bid Side | | | Ask Side | | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |
| 1 | 250 | 9750 | 9760 | 500 | 1 |
| 2 | 50 | 9740 | 9770 | 200 | 2 |
| 3 | 700 | 9730 | 9780 | 100 | 3 |
| 4 | 350 | 9720 | 9790 | 150 | 4 |
| 5 | 150 | 9710 | 9850 | 300 | 5 |
| 6 | 250 | 9700 | | | |
| 7 | 100 | 9690 | | | |
| 8 | 150 | 9680 | | | |
| 9 | 50 | 9670 | | | |
| 10 | 150 | 9660 | | | |

Price 9750 and quantity 250 is added according to the message.

Price 9650 and quantity 100 must be deleted by the client.

Price 9660 quantity must be reduced to 150 – PriceLevel 10 is used in the incoming message to reflect the new price level of the price 9660 after the addition of the price 9750.

Example 4 - Explicit Additions

For DP clients, explicit additions are relevant, but notice also that the aggregated 11th price level will also be adjusted – see example 5 below for details.

If orders are removed so that there are now less than 5 levels for D-Lite and 10 levels for DS and DP visible then the server will also automatically send the additional level(s) that are now revealed.

For example, if the bid order with price 9750 and quantity 250 is now removed from the book above and this reveals an 6th level for D-Lite and 11th level for DS and DP which need to be disseminated then it will cause the following message to be sent:

| D 1 144 | | |
|---------|-------------------|---------|
| D-Lite | | |
| Offset | Field Name | Value |
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | OrderbookID | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 250 |
| 20 | Price | 9750 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |
| 31 | UpdateAction | 2 |
| 32 | Filler | NULL |
| 36 | AggregateQuantity | 250 |
| 44 | Price | 9700 |
| 48 | NumberOfOrders | 1 |
| 52 | Side | 0 (Bid) |
| 54 | PriceLevel | 5 |
| 55 | UpdateAction | 0 |
| 56 | Filler | NULL |

The resulting order book should now be;

| D-Lite | | | | | | |
|---|----------|------|-------------------|------------|---|--|
| | Bid Side | | Ask Side | | | |
| PriceLevel AggregateQuantity Price Price Ag | | | AggregateQuantity | PriceLevel | | |
| 1 | 50 | 9740 | 9760 | 500 | 1 | |
| 2 | 700 | 9730 | 9770 | 200 | 2 | |
| 3 | 350 | 9720 | 9780 | 100 | 3 | |
| 4 | 150 | 9710 | 9790 | 150 | 4 | |
| 5 | 250 | 9700 | 9850 | 300 | 5 | |

| DS and | DP | |
|--------|-------------------|---------|
| Offset | Field Name | Value |
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | OrderbookID | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 250 |
| 20 | Price | 9750 |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 1 |

| 31 | UpdateAction | 2 | |
|----|-------------------|---------|--|
| 32 | Filler | NULL | |
| 36 | AggregateQuantity | 100 | |
| 44 | Price | 9650 | |
| 48 | NumberOfOrders | 1 | |
| 52 | Side | 0 (Bid) | |
| 54 | PriceLevel | 10 | |
| 55 | UpdateAction | 0 | |
| 56 | Filler | NULL | |

The resulting order book should now be;

| DS and DP | | | | | | |
|------------|-------------------|-------|----------|-------------------|------------|--|
| | Bid Side | | Ask Side | | | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel | |
| 1 | 50 | 9740 | 9760 | 500 | 1 | |
| 2 | 700 | 9730 | 9770 | 200 | 2 | |
| 3 | 350 | 9720 | 9780 | 100 | 3 | |
| 4 | 150 | 9710 | 9790 | 150 | 4 | |
| 5 | 250 | 9700 | 9850 | 300 | 5 | |
| 6 | 100 | 9690 | | | | |
| 7 | 150 | 9680 | | | | |
| 8 | 50 | 9670 | | | | |
| 9 | 200 | 9660 | | | | |
| 10 | 100 | 9650 | | | | |

Example 5 – The Aggregated 11th Level

The aggregated 11th price level is available to DP clients who use the 10BBO+11 representation and it shows total order volume beyond the 10th level. In the following example a Bid Order (Quantity 200) is added at price level 9640 to the orderbook shown above. As a result a new price level is sent.

| DP | | |
|--------|-------------------|---------|
| Offset | Field Name | Value |
| 0 | MsgSize | 60 |
| 2 | MsgType | 53 |
| 4 | OrderbookID | 1234 |
| 8 | Filler | NULL |
| 11 | NoEntries | 2 |
| 12 | AggregateQuantity | 200 |
| 20 | Price | NULL |
| 24 | NumberOfOrders | 1 |
| 28 | Side | 0 (Bid) |
| 30 | PriceLevel | 255 |
| 31 | UpdateAction | 0 (New) |
| 32 | Filler | NULL |

The resulting order book should now be;

| DP | | | | | |
|------------|-------------------|-------|----------|-------------------|------------|
| Bid Side | | | Ask Side | | |
| PriceLevel | AggregateQuantity | Price | Price | AggregateQuantity | PriceLevel |

| 1 | 50 | 9740 | 9760 | 500 | 1 |
|-----|-----|------|------|-----|---|
| 2 | 700 | 9730 | 9770 | 200 | 2 |
| 3 | 350 | 9720 | 9780 | 100 | 3 |
| 4 | 150 | 9710 | 9790 | 150 | 4 |
| 5 | 250 | 9700 | 9850 | 300 | 5 |
| 6 | 100 | 9690 | | | |
| 7 | 150 | 9680 | | | |
| 8 | 50 | 9670 | | | |
| 9 | 200 | 9660 | | | |
| 10 | 100 | 9650 | | | |
| >10 | 200 | NULL | | | |

Example 6 - Market Orders

Market Orders may arrive during the Pre-Open period. If a Calculated Opening Price (COP) is available then the COP Merge will be applied – see example 7 below. However, if a COP is not available (i.e. the order book is not crossed or not locked), then the following table demonstrates how market orders are displayed.

- One or more market orders are present on the Bid side (since Price Level 1 has a Price which is Null)
- There are no market orders present on the Ask side (since Price Level 1 has a Price which is not Null)
- The best bid limit order is at price 9710 and the best ask limit order is at 9720

| D-Lite | | | | | | |
|------------|-----------------------|-------|----------|-----------------------|------------|--|
| Bid Side | | | Ask Side | | | |
| PriceLevel | Aggregate Quantity | Price | Price | Aggregate Quantity | PriceLevel | |
| 1 | 7900 | Null | 9720 | 8200 | 1 | |
| 2 | 7700 | 9710 | 9730 | 2000 | 2 | |
| 3 | 6800 | 9700 | 9740 | 1000 | 3 | |
| 4 | 2000 | 9690 | 9750 | 1500 | 4 | |
| 5 | 200 | 9680 | 9860 | 8000 | 5 | |

| DS and DP | | | | | |
|------------|-----------------------|-------|----------|-----------------------|------------|
| Bid Side | | | Ask Side | | |
| PriceLevel | Aggregate Quantity | Price | Price | Aggregate Quantity | PriceLevel |
| 1 | 7900 | Null | 9720 | 8200 | 1 |
| 2 | 7700 | 9710 | 9730 | 2000 | 2 |
| 3 | 6800 | 9700 | 9740 | 1000 | 3 |
| 4 | 2000 | 9690 | 9750 | 1500 | 4 |
| 5 | 200 | 9680 | 9860 | 8000 | 5 |
| 6 | 1000 | 9650 | | | |
| 7 | 2500 | 9640 | | | |
| 8 | 1000 | 9620 | | | |
| 9 | 1000 | 9600 | | | |

Example 7 - COP Merge

Certain series involve a Pre-Open period during which the order book may be merged to the calculated opening price. Taking the previous example as a starting point, imagine the following two events occur;

- A new bid limit order arrives at price 9720, quantity 1000
- A COP message arrives for price 9720

These two events mean that the order book will be modified as shown below. Note the following points;

- Best bid and best ask are now the same price (this is the COP price)
- Any limit orders at or better than the COP are aggregated into Price Level 1 and this includes any market orders
- Remaining limit orders which are worse than the COP are shown at Price Level 2 and below

| D-Lite | | | | | | |
|------------|-----------------------|-------|----------|-----------------------|------------|--|
| Bid Side | | | Ask Side | | | |
| PriceLevel | Aggregate Quantity | Price | Price | Aggregate Quantity | PriceLevel | |
| 1 | 8900 | 9720 | 9720 | 8200 | 1 | |
| 2 | 7700 | 9710 | 9730 | 2000 | 2 | |
| 3 | 6800 | 9700 | 9740 | 1000 | 3 | |
| 4 | 2000 | 9690 | 9750 | 1500 | 4 | |
| 5 | 200 | 9680 | 9860 | 8000 | 5 | |

| DS and DP | | | | | |
|---|------|-----------------------|------------|------|---|
| Bid Side | | | Ask Side | | |
| PriceLevel Aggregate Price Price Quantity | | Aggregate Quantity | PriceLevel | | |
| 1 | 8900 | 9720 | 9720 | 8200 | 1 |
| 2 | 7700 | 9710 | 9730 | 2000 | 2 |
| 3 | 6800 | 9700 | 9740 | 1000 | 3 |
| 4 | 2000 | 9690 | 9750 | 1500 | 4 |
| 5 | 200 | 9680 | 9860 | 8000 | 5 |
| 6 | 1000 | 9650 | | | |
| 7 | 2500 | 9640 | | | |
| 8 | 1000 | 9620 | | | |
| 9 | 1000 | 9600 | | | |

Example 8 – Orderbook Clear

In certain failure scenarios the system may send an 'Orderbook Clear' message at which point clients should clear both Bid and Ask side orderbooks for the specified series. An example message is shown below.

Following an 'Orderbook Clear' message any existing orders for the series will be resent as normal to rebuild the current image.

| Field | Value |
|-------------------|--------|
| MsgSize | 36 |
| MsgType | 353 |
| Orderbook ID | 123456 |
| Filler | _ |
| NoEntries | 1 |
| AggregateQuantity | 0 |
| Price | 0 |
| NumberOfOrders | 0 |
| Side | 0 |
| Filler | _ |
| PriceLevel | 0 |
| UpdateAction | 74 |
| Filler | _ |

7. AUCTION PERIOD SPECIAL HANDLING

During the pre-opening period the level 2 orderbook messages that are disseminated are adjusted so that clients do not receive a crossed orderbook. Note that this special handling only applies to instruments which have an opening auction.

During auction session before the matching takes place, a Calculated Opening Price (364) message will be disseminated in the event of crossed book. In such case, Aggregated Order Book Update (353) messages will be sent to update the top price level of both sides with Price equalling the COP, Number of Orders and Aggregate Quantity including those of market orders and orders at prices at or better than the COP. See Example 7 in the previous section for details. If the book is not crossed then a Calculated Opening Price (364) will not be available, and any market orders will be displayed at Price Level 1. See Example 6 in the previous section for details.

In this way:

- D-Lite, DS and DP clients will receive orderbook messages that are adjusted using 'COP Merge' (details below)
- · DF clients will not receive any order information as individual orders will not be sent during the auction session

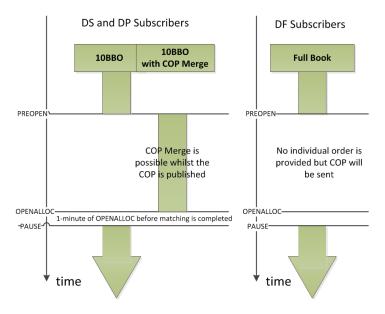


Figure 1 - Auction Period

COP Merge

Bids with a price that is the same or greater than the COP will be shown at the COP price. Offers with a price that is the same or less than the COP will be shown at the COP price.

© Copyright 2020 HKEX 62/67

8. HKEX DERIVATIVES MARKET

8.1 MARKET STATES

The market states and types of trading activity can take place in each state are explained below:

[&]quot;AHT" means After Hour Trading Session.

| Status Code | Symbol | Description | Applicability | Session |
|----------------|-------------------|---|--|---------|
| 1 | OPENALLOC | OPEN ALLOCATION SESSION | Markets with Pre-market Opening Period | Regular |
| 2 | CLOSE | MARKET CLOSED | Markets not tradable in T+1 Session | Regular |
| 3 | OPEN | MARKET OPEN | All markets | Regular |
| 4 | PREOPEN | PREOPEN SESSION | Markets with Pre-market Opening Period | Regular |
| 5 | PREOPENALLOC | PREOPEN ALLOCATION SESSION | Markets with Pre-market Opening Period | Regular |
| 6 | PAUSE | MARKET PAUSE | All markets | Regular |
| 7 | PRE_MKT_ACT | PRE-MARKET ACTIVITIES | Markets without Pre-market Opening Period | Regular |
| 8 | CL_START | CLEARING SESSION START | Markets tradable in T+1 Session | All |
| 9 | CL_CLOSE | CLEARING SESSION CLOSED | All markets | All |
| 10 | AHT_CLOSE | AHFT MARKET CLOSED | Markets tradable in T+1 Session | AHT |
| 11 | AHT_CLR_INFO | AHFT RESET PRICE INFORMATION | Markets tradable in T+1 Session | AHT |
| 12 | AHT_INACT_T_ORDER | AHFT INACTIVE NON T+1 ORDER | Markets tradable in T+1 Session | AHT |
| 13 | AHT_NEXT_DAY | AHFT RESET PRICE INFORMATION FOR NEXT BUSINESS DAY | Markets tradable in T+1 Session | АНТ |
| 14 | AHT_OPEN | AHFT MARKET OPEN | Markets tradable in T+1 Session | AHT |
| 15 | AHT_OPEN_PL | AHFT MARKET OPEN | Markets tradable in T+1 Session with price limit control enabled | AHT |
| 16 | AHT_PRE_MKT_ACT | AHFT PRE-MARKET ACTIVITIES | Markets tradable in T+1 Session | AHT |
| 17 | OPEN_PL | MARKET OPEN | Markets enabled with price limit control | Regular |
| 18 | CLOSE_TODAY | MARKET CLOSED FOR TODAY TRADING | Markets tradable in T+1 Session | Regular |
| 19 | OPEN_DPL | MARKET OPEN | Markets enabled with dynamic price banding mechanism | Regular |
| 20 | FAILOVER | SITE FAILOVER | All markets | All |
| 21 | CLOSE_TODAY_E | MARKET CLOSED FOR TODAY TRADING | Markets tradable in T+1 Session | Regular |
| 22 | AHT_CLOSE_E | AHFT MARKET CLOSED | Markets tradable in T+1 Session | AHT |

© Copyright 2020 HKEX 63/67

| 23 | OPEN_DPL_VCM | MARKET OPEN | Markets enabled with dynamic price banding mechanism and VCM control | Regular |
|----|--------------------|-------------------------|---|---------|
| 24 | OPEN_VCM | MARKET OPEN | Markets enabled with VCM control | Regular |
| 25 | VCM_COOL_OFF_DPL * | VCM COOL OFF | Instrument Series State, VCM cool off status with dynamic price banding mechansim | Regular |
| 26 | VCM_COOL_OFF * | VCM COOL OFF | Instrument Series State, VCM cool off status | Regular |
| 27 | RESET_VCM | RESET VCM | Reset counter for VCM trigger time | Regular |
| 28 | HALT | HALT | Trading Halt | AHT |
| 29 | DAYEND | RESET PRICE INFORMATION | Markets tradable in T+1 Session | AHT |

^{*} Applicable to Instrument Series (i.e. StateLevel 4) only

© Copyright 2020 HKEX 64/67

8.2 DEAL SOURCES

The deal source codes are explained below:

| Deal Source Code | Description |
|------------------|---|
| 1 | Matched by system, automatically. |
| 2 | Matched by system, manually. |
| 3 | Matched outside exchange, different brokers. |
| 4 | Matched outside exchange, different brokers, reg. by exchange. |
| 5 | Matched outside exchange, one broker. |
| 6 | Matched outside exchange, one broker, reg. by exchange. |
| 7 | Combination order matched against another combination order when matched by the Exchange, electronically. |
| 20 | Deal made at the end of an auction. |
| 36 | Tailor-made combination |
| 43 | Combo versus Outright |

© Copyright 2020 HKEX 65/67

8.3 LIST OF INSTRUMENT CODE

| Instrument Code | Description |
|-----------------|--|
| 4 | Futures |
| 6 | Call (American style) |
| 7 | Put (American style) |
| 22 | Call (European style) |
| 23 | Put (European style) |
| 170 | Options Straddle |
| 171 | Options Strangle |
| 172 | Standard Combo Series for Stock Options Market (SOM) – Synthetic Futures |
| 201 | Time Spread (level = 01) |
| 202 | Time Spread (level = 02) |
| 203 | Time Spread (level = 03) |
| 204 | Time Spread (level = 04) |
| 205 | Time Spread (level = 05) |
| 206 | Time Spread (level = 06) |
| 207 | Time Spread (level = 07) |
| 208 | Time Spread (level = 08) |
| 209 | Time Spread (level = 09) |
| 210 | Time Spread (level = 10) |
| 211 | Time Spread (level = 11) |
| 212 | Time Spread (level = 12) |
| 213 | Time Spread (level = 13) |
| 214 | Time Spread (level = 14) |
| 215 | Time Spread (level = 15) |
| 216 | Time Spread (level = 16) |
| 217 | Time Spread (level = 17) |
| 218 | Time Spread (level = 18) |
| 219 | Time Spread (level = 19) |
| 220 | Time Spread (level = 20) |
| 221 | Time Spread (level = 21) |
| 222 | Time Spread (level = 22) |
| 223 | Time Spread (level = 23) |
| 250 | Tailor-made combination |
| 254 | Exchange Rate |
| 255 | Payment Currency |

Note:

Instrument codes 4, 6, 7, 22 and 23 are for normal series whereas the remaining are for Combo Series.

© Copyright 2020 HKEX 66/67

8.4 LIST OF MARKET ID

| Market ID | Description | Market Type |
|-----------|--|-------------|
| 1 | CESC Index Futures / Options | Non-SOM |
| 2 | Stock Futures | Non-SOM |
| 3 | Three-Year Exchange Fund Note Futures | Non-SOM |
| 16 | Mini Hang Seng Index Futures / Options | Non-SOM |
| 20 | Stock Options | SOM |
| 24 | HIBOR | Non-SOM |
| 27 | Dividend Futures | Non-SOM |
| 34 | Hang Seng Index Futures / Options | Non-SOM |
| 35 | Flexible Hang Seng Index Options | Non-SOM |
| 37 | Flexible Hang Seng China Enterprises Index Options | Non-SOM |
| 38 | Hang Seng China Enterprises Index Futures / Options | Non-SOM |
| 39 | Weekly Hang Seng Index Options | Non-SOM |
| 51 | HSI Volatility Index Futures | Non-SOM |
| 60 | Sector Index Futures | Non-SOM |
| 70 | Renminbi Currency Futures / Options | Non-SOM |
| 86 | Hang Seng Index / Hang Seng China Enterprises Index (Gross / Net Total Return Index) Futures | Non-SOM |
| 87 | Weekly Hang Seng China Enterprises Index Options | Non-SOM |
| 93 | IBOVESPA Index Futures | Non-SOM |
| 96 | S&P BSE Sensex Index Futures | Non-SOM |
| 99 | FTSE/JSE Top 40 Index Futures | Non-SOM |
| 102 | MICEX Index Futures | Non-SOM |
| 108 | MSCI AxJ Futures (NTR) | Non-SOM |
| 111 | Physically settled USD Silver Futures | Non-SOM |
| 112 | Physically settled CNH Silver Futures | Non-SOM |
| 115 | Physically Settled CNH Gold Futures | Non-SOM |
| 116 | Physically Settled USD Gold Futures | Non-SOM |
| 117 | MOF T-Bond Futures | Non-SOM |
| 118 | USD Base and Ferrous Futures | Non-SOM |
| 120 | CNH London Metal Mini Futures | Non-SOM |
| 122 | Cash-Settled RMB Currency Futures | Non-SOM |
| 125 | Cash-Settled CNHUSD Futures | Non-SOM |
| 160 | MSCI JPY Index Futures (Price & NTR) | Non-SOM |
| 161 | MSCI USD Index Futures (NTR) | Non-SOM |
| 166 | MSCI USD Index Futures and Options (Price) | Non-SOM |
| 170 | MSCI SGD Index Futures (Price) | Non-SOM |

Note:

Clients should ignore the messages with non-zero Market ID other than those listed above.

© Copyright 2020 HKEX 67/67