



INTERFACE SPECIFICATIONS

HKEx Orion Market Data Platform Derivatives Market Datafeed Products

Binary Protocol

DOCUMENT HISTORY

Version	Date	Changes
1.0	31 Jan 2013	First Distribution Issue

CONTENTS

- DOCUMENT HISTORY 2**
- CONTENTS..... 3**
- 1. INTRODUCTION..... 5**
 - 1.1 PURPOSE 5
 - 1.2 READING GUIDE..... 5
 - 1.3 PRODUCTS 5
 - 1.3.1 *Derivatives Standard ('DS')*..... 6
 - 1.3.2 *Derivatives Premium ('DP')*..... 6
 - 1.3.3 *Derivatives Fulltick ('DF')* 6
 - 1.3.4 *Summary Table*..... 6
- 2. SYSTEM OVERVIEW 7**
 - 2.1 SCOPE 7
 - 2.1.1 *Multicast*..... 7
 - 2.1.2 *Dual Multicast Channels*..... 7
 - 2.1.3 *Recovery Mechanisms* 7
 - 2.2 SESSION MANAGEMENT 7
 - 2.2.1 *Start of Day*..... 7
 - 2.2.2 *Normal Transmission* 8
 - 2.2.3 *End of Day*..... 8
 - 2.2.4 *Error Recovery* 8
 - 2.3 TRADING SESSIONS 8
 - 2.3.1 *Extended Trading Hours* 9
 - 2.4 RACE CONDITIONS 9
- 3. MESSAGE FORMATS..... 10**
 - 3.1 DATA TYPES 10
 - 3.1.1 *Null Values*..... 10
 - 3.1.2 *Currency Values* 10
 - 3.1.3 *Decimal Values* 10
 - 3.1.4 *Bitmap Values*..... 10
 - 3.2 PACKET STRUCTURE 11
 - 3.3 PACKET HEADER..... 12
 - 3.4 CONTROL MESSAGES..... 12
 - 3.4.1 *Heartbeat*..... 12
 - 3.4.2 *Sequence Reset (100)*..... 12
 - 3.5 RETRANSMISSION 13
 - 3.5.1 *Logon (101)*..... 13
 - 3.5.2 *Logon Response (102)*..... 13
 - 3.5.3 *Retransmission Request (201)* 13
 - 3.5.4 *Retransmission Response (202)*..... 14
 - 3.6 REFRESH 14
 - 3.6.1 *Refresh Complete (203)* 14
 - 3.7 REFERENCE DATA..... 15
 - 3.7.1 *Commodity Definition (301)* 16
 - 3.7.2 *Class Definition (302)*..... 17

3.7.3	<i>Series Definition Base (303)</i>	19
3.7.4	<i>Series Definition Extended (304)</i>	19
3.7.5	<i>Combination Definition (305)</i>	21
3.8	STATUS DATA	22
3.8.1	<i>Market Status (320)</i>	22
3.8.2	<i>Series Status (321)</i>	23
3.8.3	<i>Commodity Status (322)</i>	23
3.9	ORDER BOOK DATA	23
3.9.1	<i>Add Order (330)</i>	23
3.9.2	<i>Modify Order (331)</i>	25
3.9.3	<i>Delete Order (332)</i>	26
3.9.4	<i>Aggregate Order Book Update (353)</i>	26
3.9.5	<i>Orderbook Clear (335)</i>	27
3.9.6	<i>Quote Request (336)</i>	28
3.10	TRADE AND PRICE DATA	28
3.10.1	<i>Trade (350)</i>	28
3.10.2	<i>Trade Amendment (356)</i>	29
3.10.3	<i>Trade Statistics (360)</i>	30
3.10.4	<i>Series Statistics (363)</i>	31
3.10.5	<i>Calculated Opening Price (364)</i>	32
3.10.6	<i>Estimated Average Settlement Price (365)</i>	32
3.11	NEWS	33
3.11.1	<i>Market Alert (323)</i>	33
3.12	CLEARING INFORMATION	34
3.12.1	<i>Open Interest (366)</i>	34
3.12.2	<i>Implied Volatility (367)</i>	34
4.	RECOVERY	35
4.1	GAP DETECTION	35
4.2	LINE ARBITRATION	36
4.3	RETRANSMISSION SERVICE	38
4.4	REFRESH SERVICE	40
4.4.1	<i>Refresh of Market Status</i>	42
5.	FULLTICK ORDERBOOK MANAGEMENT	43
6.	AGGREGATE ORDER BOOK MANAGEMENT	44
7.	AUCTION PERIOD SPECIAL HANDLING	49
8.	HKEX DERIVATIVES MARKET	50
8.1	MARKET STATES	50
8.2	DEAL SOURCES	50
8.3	LIST OF INSTRUMENT CODE	51
8.4	LIST OF MARKET ID	52

1. INTRODUCTION

1.1 PURPOSE

This document specifies the Binary interface of the HKEx Orion Market Data Platform “OMD” for the Derivatives Market.

This document is the Transmission Specification(s) of the relevant Datafeed(s) under your Market Data Vendor License Agreement or the Market Data End-User License Agreement (“License Agreement”). Please refer to Section 1.2 and the summary table at Section 1.3 for the information applicable to the Datafeed(s) under your License Agreement.

HKEx endeavors to ensure the accuracy and reliability of the information provided in this interface specification, but takes no responsibility for any errors or omissions or for any losses arising from decisions, action, or inaction based on this information. The Licensee shall not use such interface specifications for any purpose other than as expressly permitted under the Licence Agreement. No part of this document may be copied, distributed, transmitted, transcribed, stored in a retrieval system, translated into any human or computer language, or disclosed to third parties without written permission from HKEx-IS.

1.2 READING GUIDE

The chapters following this introduction are:

- Chapter 2: System Overview
- Chapter 3: Message Formats
- Chapter 4: Recovery
- Chapter 5: FullTick Order Book Management
- Chapter 6: Aggregated Order Book Management
- Chapter 7: Auction Period Special Handling
- Chapter 8: HKEx Derivatives Market

All chapters except Chapter 3 are applicable to all Datafeeds unless otherwise specified. In Chapter 3, there are indications* in individual sections/sub-sections for their applicability to individual Datafeeds. Below is an example of the table along with explanations of what each of the datafeeds represent.

The information is also summarised in Section 1.3 Summary Table.

* Example: Section 3.3 is applicable to DS, DP and DF datafeed.

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.3	●	●	●

1.3 PRODUCTS

A range of products are provided catering for the varying needs of OMD subscribers. The products are described below.

Each of the 4 datafeeds described in this section are available by splitting into two separate sets of multicast group channels for the Stock Options Market and the Non-Stock Options Markets to better serve OMD clients on bandwidth consumption planning. Messages are applicable to datafeeds irrespective of whether it belongs to Stock Options Market or non-Stock Options Markets. For the avoidance of doubt, Stock Options Market (“SOM”) refer to the market for trading the stock option that is a financial contract based on a single underlying stock which is traded on SEHK and cleared through the SEHK Options Clearing House Limited (SEOCH). Non-Stock Options Markets (“Non-SOM”) refer to the markets of trading HKEx derivatives products on HKFE. For the latest list of derivatives products on HKFE, please refer to the [HKEx website](#).”

1.3.1 Derivatives Standard ('DS')

This is a conflated feed for Derivatives Market data which provides Level 2 book showing up to 10 aggregated price levels.

1.3.1.1 Complimentary Feed to DS – Derivatives Trades ('DT')

DT is a streaming trades feed with all Trade and Trade Amendments and offered complimentary to the DS clients.

1.3.2 Derivatives Premium ('DP')

This is a streaming feed for Derivatives Market data which provides Level 2 book showing up to 10 aggregated price levels plus an aggregated 11th level showing total order volume beyond the 10th level. This datafeed also includes Trades and Trade Amendments. Please see note on trade and order handling.

1.3.3 Derivatives Fulltick ('DF')

This is a streaming feed containing the full order book and which includes individual orders, trades and trade amendments.

1.3.4 Summary Table

The products above are shown below – please note specific chapters that are relevant to the individual products.

● The information supplied in the corresponding sub-section applies to the Datafeed(s)


▲ DT complimentary to the DS

Section	Message Formats	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.1	Data Types	●	●	●
3.2	Packet Structure	●	●	●
3.3	Packet Header	●	●	●
3.4	Control Messages	●	●	●
3.5	Retransmission	●	●	●
3.6	Refresh	●	●	●
3.7	Reference Data	●	●	●
3.8	Status Data	●	●	●
3.9.1	Add Order (330)			●
3.9.2	Modify Order (331)			●
3.9.3	Delete Order (332)			●
3.9.4	Aggregate Order Book Update (353)	●	●	
3.9.5	Orderbook Clear (335)			●
3.9.6	Quote Request (336)	●	●	●
3.10.1	Trade (350)	▲	●	●
3.10.2	Trade Amendment (356)	▲	●	●
3.10.3	Trade Statistics (360)	●		
3.10.4	Series Statistics (363)		●	
3.10.5	Calculated Opening Price (364)	●	●	●
3.10.6	Estimated Average Settlement Price (365)	●	●	
3.11.1	Market Alert (323)	●	●	●
3.12.1	Open Interest (366)	●	●	
3.12.2	Implied Volatility (367)		●	
5	FullTick OrderBook Management			●
6	Aggregate Order Book Management	●	●	

2. SYSTEM OVERVIEW

2.1 SCOPE

Figure 1: Access to Market Data

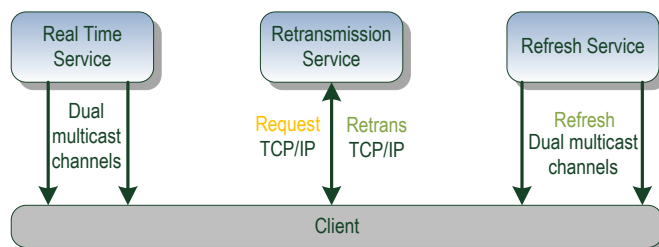

OMD provides market data represented in an efficient binary message format for all instruments traded on the Derivatives Market. It has been designed for high throughput and low latency.

2.1.1 Multicast

Messages are published in a one-to-many fashion using the IP multicast and UDP transport protocols. Multicast is not a connection-oriented protocol. Data is sent strictly in one direction from server to clients.

2.1.2 Dual Multicast Channels

Due to the inherently unreliable nature of the UDP transport, packets may be lost or delivered out-of-order. To mitigate the risk of packet loss, the messages are duplicated and sent over two separate multicast channels (dual channels). Technically, a multicast channel corresponds to a multicast group.

Each pair of dual multicast channels has a unique identifier, which is referred to as the ChannelID.

More details regarding the configuration parameters (including IP addresses, port numbers corresponding to the multicast channels) will be found in a Connectivity Guide which will be provided at a later stage.

2.1.3 Recovery Mechanisms

OMD provides two recovery mechanisms:

- A retransmission server provides on request gap-fill retransmission of lost messages. The retransmission requests and gap-fill replies are point-to-point (TCP/IP connection).
- A refresh server provides snapshots of the market state at regular intervals throughout the business day. Snapshots are sent using multicast on separate channels for the real time messages.

2.2 SESSION MANAGEMENT

Each multicast channel maintains its own session. A session is limited to one business day. During this day the message sequence number is strictly increasing and therefore unique within the channel.

2.2.1 Start of Day

OMD Derivatives Market (“OMD-D”) will normally be brought up at around 5:00am. This start up time, however, is not rigid and the Exchange has the right to adjust this time according to the different trading situations.

On each channel the first message at the start of the business day is the Sequence Reset message. The Sequence Reset message carries sequence number 1. On receipt of this message, the client must clear all cached data for all instruments.

The messages sent at start of day are:

- Commodity Definition, Class Definition, Series Definition Base, Series Definition Extend and Combination, messages for all tradeable series, including combination series
- Latest series quotation and trade snapshot.
- Latest market and series status snapshot
- Previous day open interest & settlement information for all tradeable series if available
- The latest Market message, COP ,EAS

If a client starts listening after the start of business day and misses the Sequence Reset message and reference data, it must use the refresh service to recover and synchronize with the real time channels.

2.2.2 Normal Transmission

Normal message transmission is expected between when the market opens for trading and when the market is closed. Heartbeats are sent every at regular intervals (currently set at every 2 seconds) on each channel when there is no activity. HKEx may adjust this interval.

2.2.3 End of Day

OMD will typically shut down following the end of after hours trading at around midnight Hong Kong time. Later shutdown is possible to cater for special circumstances such as capital adjustment effective the following trading day. Shutdown time is not rigid and the Exchange has the right to adjust this time according to the different trading situations.

Subscribers should wait for a Trading Session Status (20) message marking end of day before disconnecting.

2.2.4 Error Recovery

2.2.4.1 System Component Failure

If a system component fails and requires a failover or restart, there will be a short interruption in multicast dissemination from either Line A or Line B. The system is deployed in an active-active configuration with Line A and Line B being generated independently and so line arbitration will allow the client to continue receiving messages – see section 4 for more information about recovery.

2.2.4.2 Disaster Recovery

In the unlikely event of a disaster recovery situation at the primary site, OMD will be brought up at the disaster recovery site.

During the interruption, no data will be sent including heartbeats.

A Sequence Reset message will be sent on each channel when OMD is brought up. This will be followed by a snapshot of each channel. After the snapshot the market data feed will return to normal operations.

IP addresses and ports that have been provided for the disaster site's retransmission service should be used. See *Connectivity Guide for more details*.

2.3 TRADING SESSIONS

Normally, trading is conducted in auction trading session(s) and continuous trading session(s) every trading day. However, there are situations where there is only half day trading with fewer trading session(s) (Christmas eve, New Year eve and Chinese New Year eve), or a trading session is suspended due to a typhoon etc. OMD is not affected by the number of trading sessions and will continue to provide real time data as long as the Exchange's trading system is available.

2.3.1 Extended Trading Hours

Extended trading hours may apply to certain products. Trading hours of individual products are listed on the HKEx website.

2.4 RACE CONDITIONS

Due to the nature of the dissemination protocol the real time order/trade data and reference data are disseminated via separate channels so users need to be aware that there is a race condition.

As an example suppose a Market Status message is sent showing a change to state 'Closed', however for a very short time after this message the regular order and trade information for this series may continue to arrive.

3. MESSAGE FORMATS

3.1 DATA TYPES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.1	●	●	●

The following table lists all the data types used by OMD.

Format	Description
String	ASCII characters which are left aligned and null padded.
UInt8	8 bit unsigned integer.
UInt16	Little-Endian encoded 16 bit unsigned integer.
UInt32	Little-Endian encoded 32 bit unsigned integer.
UInt64	Little-Endian encoded 64 bit unsigned integer.
Int16	Little-Endian encoded 16 bit signed integer.
Int32	Little-Endian encoded 32 bit signed integer.
Int64	Little-Endian encoded 64 bit signed integer.
Binary	Unicode encoding used for Chinese characters.

3.1.1 Null Values

From time to time certain fields cannot be populated and specific values are used to represent null. This is currently used within Int32 fields of the Aggregate Order Book Update (353) message, the Calculated Opening Price (364) message, as well as the Add / Modify Order messages.

The Int32 null representation is 0x80000000 (Hex 2's complement).

3.1.2 Currency Values

See the ISO-3166 Currency Codes for a full list of possible data values. Currently the system uses the following codes; 'HKD', 'USD', 'CNY'. HKEx may add or delete currency code(s), whenever applicable, in the future.

3.1.3 Decimal Values

Decimal values are sent as integers. This is done for efficiency - for example, a price value sent as "12345" and with 3 decimal places should be interpreted as "12.345". See individual fields for number of decimal places used.

3.1.4 Bitmap Values

Certain fields within the Add Order (330), Modify Order (331) and Trade (350) messages are bitmap representations which can denote a number of properties within a single field.

For example, with the 'DealType' field shown below, if a value of 5 is received this indicates that the trade is both Printable and a 'Reported Trade'.


Offset	Field	Format	Len	Description	Values
25	DealType	UInt8	1	Deal Type Bitmap	0 None 1 Printable 2 Occurred at Cross 4 Reported Trade

3.2 PACKET STRUCTURE

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.2	●	●	●

Multicast packets are structured into a common packet header followed by zero or more messages. Messages within a packet are laid out sequentially, one after another without any spaces between them.



The maximum length of a packet is 1500 bytes.

The packet header provides information including the total packet length, the number of messages within the packet, the sequence number of the first message and a send timestamp.

A packet will only ever contain complete messages. A single message will never be fragmented across packets.

The format of each message within a packet will vary according to message type. However, regardless of the message type, each message will start with a two-byte message size (MsgSize) followed by a two-byte message type (MsgType). These are described in the following table.

Table 1: MsgSize and MsgType Fields

Field	Format	Len	Description
MsgSize	UInt16	2	Message length (including this field)
MsgType	UInt16	2	Type of message. The valid values for MsgType are below: 101 Logon 102 Logon Response 201 Retransmission Request 202 Retransmission Response 203 Refresh Complete 301 Commodity Definition 302 Class Definition 303 Series Definition Base 304 Series Definition Extended 305 Combination Definition 320 Market Status 321 Series Status 322 Commodity Status 330 Add Order 331 Modify Order 332 Delete Order 353 Aggregate Order Book Update 335 Orderbook Clear 336 Quote Request 350 Trade 356 Trade Amendment 360 Trade Statistics 363 Series Statistics 364 Calculated Opening Price 365 Estimated Average Settlement Price 322 Market Alert 366 Open Interest 367 Implied Volatility

3.3 PACKET HEADER

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.3	●	●	●

All packets will begin with a common packet header.

Offset	Field	Format	Len	Description
0	PktSize	UInt16	2	Size of the packet (including this field)
2	MsgCount	UInt8	1	Number of messages included in the packet
3	Filler	String	1	
4	SeqNum	UInt32	4	Sequence number of the first message in the packet
8	SendTime	UInt64	8	UTC Timestamp. The number of nanoseconds since <i>January 1, 1970, 00:00:00 GMT</i> , precision is provided to the nearest millisecond.
Packet length			16	

3.4 CONTROL MESSAGES

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.4	●	●	●

3.4.1 Heartbeat

Heartbeats consist of a packet header with MsgCount set to 0. They do not carry a sequence number and therefore do not increment the sequence number of the multicast channel. SeqNum is set to the sequence number of the previous message sent on the channel.

The Heartbeat message will be identical for all the services.

3.4.2 Sequence Reset (100)

The Sequence Reset message is sent on each multicast channel at start of day. It may also be sent intraday in case of a disaster recovery.

The client must ignore sequence number of the Sequence Reset message itself, and set the next expected sequence number to NewSeqNo. The client must also clear all cached data for all instruments traded in the Derivatives Market.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	100 Sequence Reset
4	NewSeqNo	UInt32	4	New sequence number.	Always set to 1
Total Length			8		

3.5 RETRANSMISSION

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.5	●	●	●

Refer to Retransmission service for details on the retransmission messages.

3.5.1 Logon (101)

The Logon message enables client authentication. This is not required for multicast channels and is only used for retransmission requests.

Normal operation: Client sends a Logon message containing username to the OMD, which responds with a Logon Response message with the SessionStatus set to 0 (Session Active).

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	101 Logon
4	Username	String	12	Username to log on	
Total Length			16		

3.5.2 Logon Response (102)

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	102 Logon Response
4	SessionStatus	UInt8	1	Status of the session	0 Session Active 5 Invalid username 100 User already connected
5	Filler	String	3		
Total Length			8		

3.5.3 Retransmission Request (201)

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	201 Retransmission Request
4	ChannelID	UInt16	2	Multicast Channel ID to which the retransmission relates	
6	Filler	String	2		
8	BeginSeqNum	UInt32	4	Beginning of sequence	
12	EndSeqNum	UInt32	4	Message sequence number of last message in range to be resent	
Total Length			16		

3.5.4 Retransmission Response (202)

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	202 Retransmission Response
4	ChannelID	UInt16	2	Multicast Channel ID with which the retransmission relates	
6	RetransStatus	UInt8	1	Status of the Retransmission response	0 Request accepted 1 Unknown/Unauthorized channel ID 2 Messages not available 100 Exceeds maximum sequence range 101 Exceeds maximum requests in a day
7	Filler	String	1		
8	BeginSeqNum	UInt32	4	Beginning of sequence	
12	EndSeqNum	UInt32	4	Message sequence number of last message in range to be resent	
Total Length			16		

3.6 REFRESH

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.6	●	●	●

Refer to Refresh service for details on the Refresh Complete message.

3.6.1 Refresh Complete (203)

This message is published to mark the end of a refresh cycle, see section 4.4 for a full description of refresh.

Message Fields


Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	203 Refresh Complete
4	LastSeqNum	UInt32	4	Sequence number with which the refresh is synchronized.	Numerical
Total Length			8		

3.7 REFERENCE DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.7	●	●	●

Static Reference data is organized into 5 messages which are shown in the entity relationship diagram below. The underlined field(s) form the primary key for each message type.

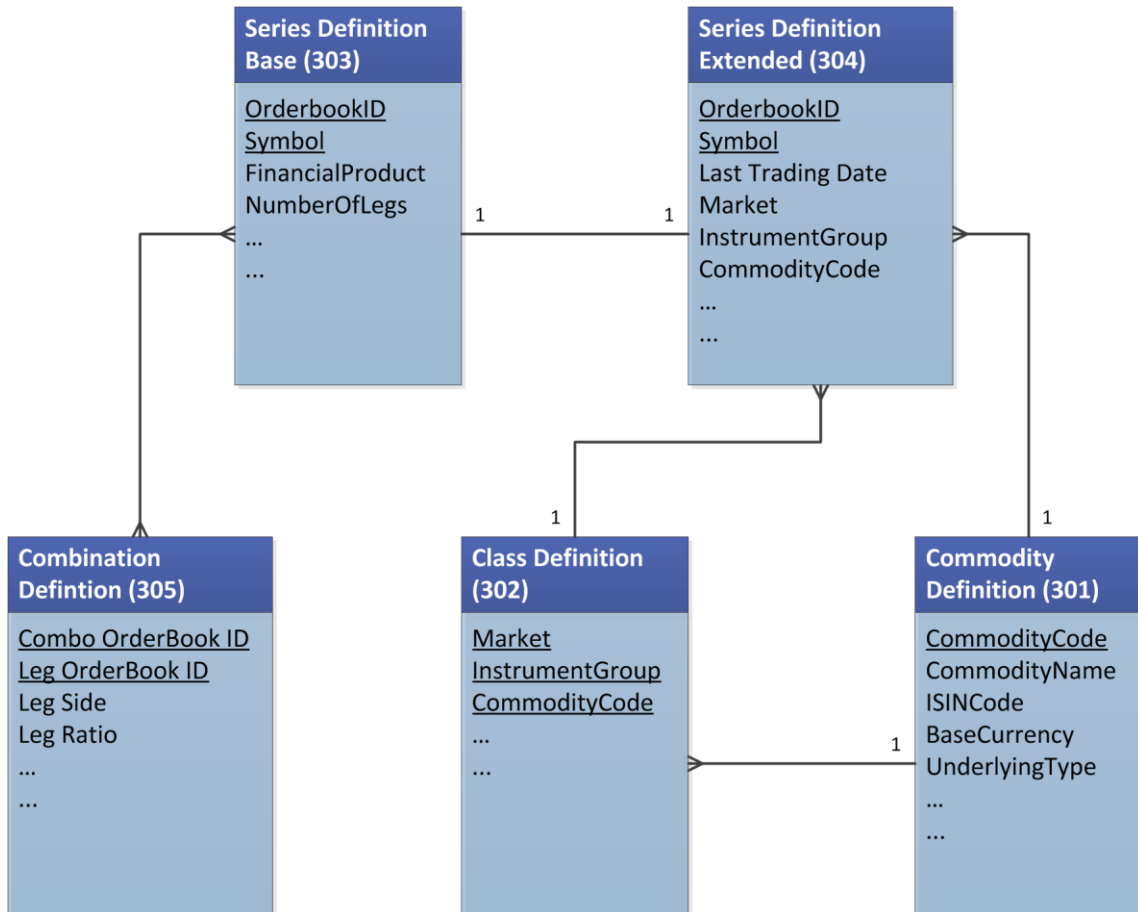

3.7.1 Commodity Definition (301)

Describes individual commodities available from the OMD-D system.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	301 Commodity Definition
4	CommodityCode	UInt16	2	Numerical identifier of the Underlying. This is the unique identifier of the message. The Series Definition Extended and the Class Definition are retrieved through this field which links them to the Commodity Definition. eg. 2005 (HKB).	
6	DecimalInUnderlyingPrice	UInt16	2	Number of implicit decimals in the underlying price received from external sources.	
8	ISINCode	String	12	A code which uniquely identifies a specific securities issue (International Securities Identification Number). For more information about ISIN code, see the international standard ISO 3166.	
20	BaseCurrency	String	3	Defines the trading currency for the instrument or the currency for the underlying. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard.	See Currency Values in section 3.1.2 for full details.
23	UnderlyingPriceUnit	UInt8	1	The price unit for the underlying	<ul style="list-style-type: none"> 1 Price 2 Yield 3 Points 4 Yield Diff 5 IMM Index 6 Basis Points 7 Inverted Yield 8 Percentage of Nominal 9 Dirty Price
24	CommodityName	String	32	Descriptive Name of the underlying Eg. Hang Seng Index	
56	NominalValue	Int64	8	Nominal Value of the Commodity	
64	UnderlyingCode	String	20	Underlying Code of the Commodity	
84	UnderlyingType	UInt8	1	Type of the underlying	<ul style="list-style-type: none"> 1 Stock 2 Currency 3 Interest rate 4 Energy 5 Soft and Agrics 6 Metal 7 Stock Index 8 Currency Index 9 Interest Rate Index 10 Energy Index 11 Softs and Agrics Index 12 Metal Index
85	EffectiveTomorrow	UInt8	1	This declaration is for series to be traded the next day	<ul style="list-style-type: none"> 0 False 1 True
86	Filler	String	2		
Total Length			88		

3.7.2 Class Definition (302)

Describes individual instrument classes available from the OMD-D system.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	302 Class Definition
4	Country	UInt8	1	Country Identifier	
5	Market	UInt8	1	Market Code	2 Stock Futures 3 Three-Year Exchange Fund Note Futures 8 Gold Futures 16 Mini Hang Seng Index Futures / Options 20 Stock Options 24 HIBOR 27 HSI Dividend Point Index Futures HSCEI Dividend Point Index Futures 34 Hang Seng Index Futures / Options 35 Flexible Hang Seng Index Options 37 Flexible H-shares Index Options 38 H-shares Index Futures / Options
6	InstrumentGroup	UInt8	1	Instrument Group This field together with the Commodity, forms the unique identifier of the message	004 Futures 006 Call (American style) 007 Put (American style) 022 Call (European style) 023 Put (European style) 119 Time Spread (level=1) 120 Time Spread (level=2) 121 Time Spread (level=3) 122 Time Spread (level=4) 149 Time Spread (level=5) 150 Time Spread (level=6) 151 Time Spread (level=7) 152 Time Spread (level=8) 165 Time Spread (level=9) 170 Options Straddle 171 Options Strangle 172 Standard Combination series for Stock Options Market (SOM) – Synthetic Futures 255 Payment Currency
7	Modifier	UInt8	1	Expiration date modified. Value is incremented by one each time the instrument is involved in an issue, split, etc. Note that the modifier value can be different for bid and ask options in the same Series.	0 New
8	CommodityCode	UInt16	2	Numerical identifier of the Underlying This field, together with the InstrumentGroup forms the unique identifier of the message The Commodity Definition and the Series Definition Extended are retrieved through this field which links them to the Class Definition Eg. eg. 2005 (HKB).	

Offset	Field	Format	Len	Description	Values
10	Filler	String	2		
12	PriceQuotationFactor	Int32	4	Defines the price quotation factor used to calculate the trade price from the order.	
16	ContractSize	UInt32	4	Number of Underlying entities per contract.	
20	DecimalInStrikePrice	UInt16	2	Number of implicit decimals in the strike price.	
22	DecimalInContractSize	UInt16	2	Number of implicit decimals in the Contract Size and the Price Quotation Factor fields.	
24	DecimalInPremium	UInt16	2	The number of decimals used in Price fields	
26	RankingType	UInt16	2	This identifies how the instrument is ranked.	<ul style="list-style-type: none"> 1 Price, Time 2 Inverted Price, Time 3 Price, Traders before MM, Time 4 Inverted Price, Traders before MM, Time 5 Price, MM before Traders, Time 6 Inverted Price, MM before Traders, Time 7 Price, Bait before Normal Orders, Time 8 Inverted Price, Bait before Normal Orders, Time 11 Price, Own Orders, Time 12 Inverted Price, Own Orders, Time
28	Tradable	UInt8	1	Defines if the instrument is a tradable instrument or not.	<ul style="list-style-type: none"> 1 Yes 2 No
29	PremiumUnit4Price	UInt8	1	The premium unit that describes the price unit in the order.	<ul style="list-style-type: none"> 1 Price 2 Yield 3 Points 4 Yield Diff 5 IMM Index 6 Basis Points 7 Inverted Yield 8 Percentage of Nominal 9 Dirty Price
30	BaseCurrency	String	3	Defines the trading currency for the instrument or the currency for the underlying. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard.	See Currency Values in section 3.1.2 for full details.
33	InstrumentClassID	String	14	The ASCII representation of the instrument class.	
47	InstrumentClassName	String	32	The full ASCII representation. name_short	
79	IsFractions	String	1	Is the premium internally represented as fractions?	<ul style="list-style-type: none"> 1 Yes 2 No
80	SettlementCurrencyID	String	32	Full descriptive name of the Settlement Currency. The representation of the currency follows the S.W.I.F.T. handbook and ISO 3166 standard.	See Currency Values in section 3.1.2 for full details.
112	Effective Tomorrow	UInt8	1	This declaration is for series to be traded the next day	<ul style="list-style-type: none"> 0 False 1 True
113	Filler	String	1		
Total Length			114		

3.7.3 Series Definition Base (303)

Describes basic series information.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	303 Series Definition Base
4	OrderbookID	UInt32	4	Numerical identifier of the order book This is the unique identifier for the series The Combination Definition is retrieved through this field which links it to the Series Definition Base	
8	Symbol	String	32	Short Name	
40	FinancialProduct	UInt8	1	Financial Product	<ul style="list-style-type: none"> 1 Option 2 Forward 3 Future 4 FRA 5 Cash 6 Payment 7 Exchange Rate 8 Interest Rate Swap 9 REPO 10 Synthetic Box Leg/Reference 11 Standard Combination 12 Guarantee 13 OTC General 14 Equity Warrant 15 Security Lending
41	DecimalsInPremium	UInt16	2	The number of decimals used in Price fields	
43	NumberOfLegs	UInt8	1	Number of legs in the series There can be up to 256 legs per series	
44	StrikePrice	Int32	4	The price at which a specific derivative contract can be exercised. Zero implies the Strike Price is not applicable	
48	ExpirationDate	String	8	Expiry date of the series	YYYYMMDD
56	DecimalsInStrikePrice	UInt16	2	Number of implicit decimals in the strike price.	
58	PutOrCall	UInt8	1	Identifies whether the series is a put or call type	<ul style="list-style-type: none"> 0 Undefined 1 Call 2 Put
59	Filler	String	1		
Total Length			60		

3.7.4 Series Definition Extended (304)

Describes series static data.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	304 Series Definition Extended
4	OrderBookID	UInt32	4	Orderbook ID	
8	Symbol	String	32	Symbol This is the unique identifier of the message	
40	Country	UInt8	1	Country Identifier	
41	Market	UInt8	1	Market Code	2 Stock Futures 3 Three-Year Exchange Fund Note Futures 8 Gold Futures 16 Mini Hang Seng Index Futures / Options 20 Stock Options 24 HIBOR 27 HSI Dividend Point Index Futures HSCEI Dividend Point Index Futures 34 Hang Seng Index Futures / Options 35 Flexible Hang Seng Index Options 37 Flexible H-shares Index Options 38 H-shares Index Futures / Options
42	InstrumentGroup	UInt8	1	Instrument Group	004 Futures 006 Call (American style) 007 Put (American style) 022 Call (European style) 023 Put (European style) 119 Time Spread (level=1) 120 Time Spread (level=2) 121 Time Spread (level=3) 122 Time Spread (level=4) 149 Time Spread (level=5) 150 Time Spread (level=6) 151 Time Spread (level=7) 152 Time Spread (level=8) 165 Time Spread (level=9) 170 Options Straddle 171 Options Strangle 172 Standard Combination series for Stock Options Market (SOM) – Synthetic Futures 255 Payment Currency
43	Modifier	UInt8	1	Expiration date modified. Value is incremented by one each time the instrument is involved in an issue, split, etc. Note that the modifier value can be different for bid and ask options in the same Series.	0 New
44	CommodityCode	UInt16	2	Numerical identifier of the Underlying This is the unique commodity identifier. The Commodity Definition and the Class Definition are retrieved through this field which links them to the Series Definition Extended	

Offset	Field	Format	Len	Description	Values
				Eg. HSI	
46	ExpirationDate	UInt16	2	Expiry date of the series	
48	StrikePrice	Int32	4	The price at which a specific derivative contract can be exercised. Zero implies the Strike Price is not applicable	
52	ContractSize	Int64	8	Number of Underlying entities per contract.	
60	ISINCode	String	12	A code which uniquely identifies a specific securities issue (International Securities Identification Number). For more information about ISIN code, see the international standard ISO 3166.	
72	SeriesStatus	UInt8	1	The actual status of the series.	<ul style="list-style-type: none"> 1 Active (both expired and not expired) 2 Suspended (temporarily stopped) 3 Issued 4 Delisted
73	EffectiveTomorrow	UInt8	1	This declaration is for next day series	<ul style="list-style-type: none"> 0 False 1 True
74	Filler	String	6		
80	EffectiveExpDate	String	8	The effective expiration date is the actual expiration date of the series and will normally be the same as expiration_date_n in the series binary code. The effective expiration date can be changed during the lifetime of the series whereas expiration_date_n will continue to hold the original expiration date.	YYYYMMDD
88	DateTimeLastTrading	Int64	8	The last trading date/time of the Series in UTC timestamp (nanoseconds since 1970) precision to the nearest second	UTC Timestamp
Total Length			96		

3.7.5 Combination Definition (305)

Describes a combination orderbook.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	305 Combination Definition
4	ComboOrderbookID	UInt32	4	Numerical identifier of the combination order book	
8	LegOrderbookID	UInt32	4	This is the orderbook identification number of the leg	
12	Filler	String	3		
15	LegSide	String	1	Identifies whether the leg within the combination order book is the same side as that defined for the leg in the OrderBook definition Possible values: As Defined or Opposite	<ul style="list-style-type: none"> B As Defined C Opposite

Offset	Field	Format	Len	Description	Values
16	LegRatio	Int32	4	Relative numbers of bid and ask contracts between the combo legs.	
Total Length			20		

3.8 STATUS DATA

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.8	●	●	●

3.8.1 Market Status (320)

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	320 Market Status
4	StateLevel	UInt16	2	Indicates the level which a state applies to	<ul style="list-style-type: none"> 1 Market 2 Instrument Type 3 Instrument Class 4 Instrument Series 5 Underlying 99 End of Business Day
6	Market	UInt8	1	Market Code Populated only if StateLevel = 1, 2 or 3	See Series Definition 'Market' field for full list of codes
7	Instrument	UInt8	1	Instrument Group Populated only if StateLevel = 2, 3	See Series Definition 'InstrumentGroup' field for full list of codes
8	OrderbookID	UInt32	4	Orderbook ID Populated only if StateLevel = 4	
12	CommodityCode	UInt32	4	Commodity Populated only if StateLevel = 3 or 5 eg. 2005 (HKB).	
16	ActualStartDate	String	8	Local Start Date	YYYYMMDD
34	ActualStartTime	String	6	Local Start Time. If specified it is a warning and defines the next planned state.	HHMMSS
30	PlannedStartDate	String	8	Local next planned Date. If specified it is a warning and defines the next planned state. If not specified it is a state change.	YYYYMMDD
38	PlannedStartTime	String	6	Local next planned time. If specified it is a warning and defines the next planned state. If not specified it is a state change.	HHMMSS
44	SecondsToStateChange	UInt16	2	Number of seconds to the next state change	
46	State	UInt16	2	Numeric identification of the State Type.	See full list of states within the appendix
48	Priority	UInt8	1	The priority of the State, either the Trading Session State or Instrument Session State. The State Priority is a number between 1-255.	
49	Filler	String	3		

Offset	Field	Format	Len	Description	Values
Total Length			52		

3.8.2 Series Status (321)

The Series Status message is generated whenever a series is suspended or resumed, or when the date/time of last trading is changed.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	321 Series Status
4	OrderbookID	UInt32	4	Numerical identifier of the order book	
8	Suspended	UInt8	1	Defines if the series is suspended or not.	1 Yes 2 No
9	Filler	String	3		
Total Length			12		

3.8.3 Commodity Status (322)

The Commodity Status message is generated whenever a commodity state changes.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	322 Commodity Status
4	CommodityCode	UInt16	2	Underlying definitions are defined by each exchange. Commodity Code is a part of the Series definition. eg. 2005 (HKB).	
6	Suspended	UInt8	1	Defines if the series is suspended or not.	1 Yes 2 No
7	Filler	String	1		
Total Length			8		

3.9 ORDER BOOK DATA

The full order book information is not available in auction session until the completion of auction. However for DS and DP subscribers an uncrossed orderbook will continue to be sent during the pre-auction period – see section 3.9.5 for details.

3.9.1 Add Order (330)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.1			●

The Add Order message is generated when a new order is inserted into the order book. The OrderbookID is unique per series but will not increment consecutively. Unique orders are identified by OrderBookID, Side and OrderId. The OrderBookPosition identifies the rank of an order when compared to other orders at the same price level.

Note that for series which have an auction session then DF subscribers will receive an **Orderbook Clear (335)** message followed by a large quantity of **Add Order (330)** messages representing the uncrossed book after the end of auction.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	330 Add Order
4	OrderbookID	UInt32	4	Uniquely identifies a series available for trading	
8	OrderId	UInt64	8	Unique identifier per series and side for each order performed within the trading system	Values may not be consecutive
16	Price	Int32	4	Price	Decimal places determined from Series Definition field 'NumberOfDecimalsPrice'
20	Quantity	UInt32	4	Number of contracts	
24	Side	UInt8	1	Side of the order	0 Bid 1 Offer
25	LotType	UInt8	1	Lot Type	Lot Type. Values: 0 Undefined 1 Odd Lot 2 Round Lot 3 Block Lot 4 All or None Lot
26	OrderType	UInt16	2	Order Type Bitmap	Additional order attributes. Values: 0 Not applicable 1 Force 2 Short Sell 4 Market Bid 8 Price Stabilization 16 Override Crossing 32 Undisclosed 1024 Fill-and-kill immediately 2048 Firm color disabled 4096 Convert to aggressive (if locked market) 8192 Bait/implied order <i>NOTE: Applicable types may be defined by the marketplace.</i> <i>NOTE 2: This field is a bit map. Multiple values may be set simultaneously.</i>
28	OrderBookPosition	UInt32	4	Order rank information for the order position within the order book for each series	Integer
Total Length			32		

3.9.2 Modify Order (331)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.2			●

The Modify Order message is generated when an existing order identified by the OrderId is modified. The attributes that can be modified are Position, Quantity, Price and OrderType.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	331 Modify Order
4	Orderbook ID	UInt32	4	Uniquely identifies a series available for trading	
8	OrderId	UInt64	8	Unique identifier per series and side for each order performed within the trading system	Values may not be consecutive
16	Price	Int32	4	Price	Decimal places determined from Series Definition field 'NumberOfDecimalsPrice'
20	Quantity	UInt32	4	Number of contracts	
24	Side	UInt8	1	Side of the order	0 Bid 1 Offer
25	Filler		1		
26	OrderType	UInt16	2	Order Type Bitmap	Additional order attributes. Values: 0 Not applicable 1 Force 2 Short Sell 4 Market Bid 8 Price Stabilization 16 Override Crossing 32 Undisclosed 1024 Fill-and-kill immediately 2048 Firm color disabled 4096 Convert to aggressive (if locked market) 8192 Bait/IMPLIED order NOTE: Applicable types may be defined by the marketplace. NOTE 2: This field is a bit map. Multiple values may be set simultaneously.
28	OrderBookPosition	UInt32	4	Order rank information for the order position within the order book for each series	Integer
Total Length			32		

3.9.3 Delete Order (332)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.3			●

The Delete Order message is generated when an existing order identified by the OrderId is deleted.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	332 Delete Order
4	OrderbookID	UInt32	4	Uniquely identifies a series available for trading	
8	OrderId	UInt64	8	Unique identifier per series and side for each order performed within the trading system	
16	Side	UInt8	1	Side of the order	0 Bid 1 Offer
17	Filler		1		
Total Length			18		

3.9.4 Aggregate Order Book Update (353)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.4	●	●	

For DS subscribers, the aggregate order book is sent whenever there is a orderbook change within the top 10 price levels. For DP subscribers then all orderbook changes will lead to a message being disseminated, either for the top 10 levels (like DS) or as an adjustment of the PriceLevel 255, which is a special price level used to display aggregated remaining liquidity beyond the 10th level.

For series with pre-auction periods the best bid and ask may both be equal to the calculated opening price.

Refer to Section 5 - Aggregate Order Book Management for details on the Aggregate Order Book Update message.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	353 Aggregate Order Book Update
4	Orderbook ID	UInt32	4	Uniquely identifies a series available for trading	
8	Filler	String	3		
11	NoEntries	UInt8	1	Number of book entries within the message	
12	AggregateQuantity	UInt64	8	Aggregated number of shares.	
20	Price	Int32	4	Price	Decimal places determined from Series Definition Null when PriceLevel is 255
24	NumberOfOrders	UInt32	4	Number of orders	
28	Side	UInt8	1	Side of the order	0 Bid 1 Offer
29	Filler		1		
30	PriceLevel	UInt8	1	Indicates the price level (within top 10) of the information carried in the message or whether the message carries the aggregated figures for 11+ levels	1 to 10 Level 2 Orderbook Liquidity 255 Aggregated Remaining Liquidity beyond the 10 th level – available for DP Subscribers
31	UpdateAction	UInt8	1	Type of market data update action	0 New 1 Change 2 Delete 74 Clear
32	Filler	String	4		
Total Length			12 + 24n _o		

(n_o = value of NoEntries)

3.9.5 Orderbook Clear (335)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.5			●

The Orderbook Clear message is used to inform subscribers that all existing orders should be removed from both the bid and ask sides of the specified orderbook. The message is typically used at the end of Auction;

*At the end of Auction, DF subscribers will receive an **Orderbook Clear (335)** message followed by a large quantity of **Add Order (330)** messages representing the uncrossed book.*

Subscribers should clear both bid and ask side orders for the specified orderbook.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	335 Orderbook Clear
4	Orderbook ID	UInt32	4	Uniquely identifies a series available for trading	
Total Length			8		

3.9.6 Quote Request (336)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.9.6	●	●	●

The Quote Request message is generated whenever market participants request a new quotation.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message.	336 Quote Request
4	OrderbookID	UInt32	4	Order book ID	
8	NumberOfLots	Int32	4	Number of Lots	
12	BidAskFlag	UInt8	1	Indicates if the quote request is for a Bid or Ask (or both)	0 Bid 1 Ask 2 Bid and Ask
13	Filler	String	3		
Total Length.....			16		

3.10 TRADE AND PRICE DATA

3.10.1 Trade (350)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.1	▲ (via Derivatives Trade feed)	●	●

The Trade message is generated each time a trade has been performed.

The executions may be marked as non-printable. If a participant is looking to use the data in trade tickers or volume calculations, it is recommended that participants ignore messages marked as non-printable to prevent double counting.

- NOTE 1: Combination orders on the book that execute will always be represented by this message.
- NOTE 2: Combination orders that execute will have the Printable flag set to "N". The trades that occur in the legs of the combination will be printable. This avoids double counting of the combination order and its leg trades. Leg trades will be published with the Trade message.

For DF subscribers; if the OrderID within the Trade (350) message is non-zero then users must reduce the resting order identified by the 'Quantity' within the Trade (350) message. If the outstanding quantity is zero the order must be deleted. DP subscribers will have the update managed for them and receive Aggregate Order Book Update (353) message accordingly.

Important messages: Subscribers who intend to calculate trade statistics based on Trade (350) and Trade Amendment (356) are advised NOT to compare their internally aggregated statistics with those carried in the Trade Statistics (360) and the Series Statistics (363) as they may not be synchronized given the former trade messages are disseminated on streaming basis whilst the latter statistics are published on snapshot basis."

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	350 Trade
4	OrderbookID	UInt32	4	Orderbook ID	
8	OrderID	UInt32	4	Order ID	
12	Price	Int32	4	Traded Price	
16	TradeID	UInt64	8	Match ID	
24	ComboGroupID	UInt32	4	Used to group combo and leg executions together	
28	Side	UInt8	1	Side of Orderbook ID	0 Not Available 1 Not Defined 2 Buy Order 3 Sell Order
29	DealType	UInt8	1	Deal Type Bitmap	0 None 1 Printable 2 Occurred at Cross 4 Reported Trade
30	TradeCondition	UInt16	2	The condition in which a trade was executed. Field is a Bitmap.	0 None 1 Late Trade 2 Internal Trade / Crossing 8 Buy Write 16 Off Market
32	DealInfo	UInt16	2	Information Bitmap of a deal.	0 None 1 Reported Trade 2 All or none 4 Part of combo match
34	Filler	String	6		
40	Quantity	UInt64	8	The quantity being matched in this execution.	
48	TradeTime	UInt64	8	Date and time of the last trade in UTC timestamp (nanoseconds since 1970) precision to the nearest 1/100 th second	UTC Timestamp
Total Length.....			56		

3.10.2 Trade Amendment (356)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.2	▲ (via Derivatives Trade feed)	●	●

Represents a trade amendment or cancellation.

Notes:

- If a traded quantity is reduced then a Trade Amendment (356) delete (“TradeState” = 3) will be sent followed by a rectification (“TradeState” = 2).

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	356 Trade Amendment
4	TradeID	UInt64	8	Match ID	
12	ComboGroupID	UInt32	4	Used to group combo and leg executions together	
16	Price	Int32	4	Traded Price	
20	Quantity	UInt64	8	Defines number of contracts in a deal.	
28	TradeTime	UInt64	8	Date and time of the last trade in UTC timestamp (nanoseconds since 1970) precision to the nearest 1/100 th second	UTC Timestamp
36	TradeState	UInt8	1	Trade State	2 Rectified. The trade has been rectified. 3 Deleted. The trade has been deleted.
37	Filler		3		
Total Length			40		

3.10.3 Trade Statistics (360)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.3	●		

Trade information for completed deals. The trade information or statistics information carried in this message type is provided on snapshot basis.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	360 Trade Statistics
4	OrderbookID	UInt32	4	Uniquely identifies the series	
8	Price	Int32	4	Last Traded Price	
12	DealSource	UInt8	1	Deal Source of the last trade	See full list of deal sources at the end of this document
13	Session	UInt8	1	Session indicator used to distinguish between the T and T+1 sessions	0 Statistics for T Session 1 Statistics for T+1 Session
14	Filler		2		
16	AggregateQuantity	Int64	8	Volume – total within the latest deal(s)	
24	Open	Int32	4	Price of the first committed Trade in the series during the respective Session	

Offset	Field	Format	Len	Description	Values
28	High	Int32	4	Highest price paid for a series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account, in accordance with the trade normalisation rules	
32	Low	Int32	4	Lowest price paid for a series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account, in accordance with the trade normalization rules.	
36	Filler		4		
40	TradeReportVolume	UInt64	8	Total volume of reported trades for the respective Session	
48	DealCount	UInt32	8	Number of deals completed in the respective Session	
56	Turnover	UInt64	8	Cumulative volume for the respective Session	
Total Length.....			64		

3.10.4 Series Statistics (363)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.4		●	

Provides series information including high, low and open prices. The trade information or statistics information carried in this message type is provided on snapshot basis.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	363 Series Statistics
4	OrderbookID	UInt32	4	Uniquely identifies the series	
8	Session	UInt8	1	Session	0 Statistics for T Session 1 Statistics for T+1 Session
9	Filler		3		
12	Open	Int32	4	Price of the first committed Trade in the series during the respective Session	
16	High	Int32	4	Highest price paid for the series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account, in	

Offset	Field	Format	Len	Description	Values
				accordance with the trade normalisation rules	
20	Low	Int32	4	Lowest price paid for the series during the respective Session. This is calculated after all Trades, Trades Cancellations and Trade Corrections have been taken into account, in accordance with the trade normalization rules.	
24	TradeReportVolume	UInt64	8	Total volume of reported trades for the respective Session	
32	DealCount	UInt32	4	Number of deals for the series – cumulative for the respective Session	
36	Price	Int32	4	Last Traded Price	
40	Turnover	UInt64	8	Cumulative volume for the respective Session	
Total Length.....			48		

3.10.5 Calculated Opening Price (364)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.5	●	●	●

The Calculated Opening Price (COP) message indicates an instrument's theoretical opening price during the pre-opening phases of the market (prior to an auction). A COP message is generated when the indicative matching price or volume varies. If the Price set to Null, the COP is no longer applicable.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	364 Calculated Opening Price
4	OrderbookID	UInt32	4	Order book ID	
8	CalculatedOpeningPrice	Int32	4	Calculated Opening Price	
12	Filler		4		
16	Quantity	UInt64	8	Shows the quantity available at COP	
Total Length.....			24		

3.10.6 Estimated Average Settlement Price (365)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.10.6	●	●	

The Estimated Average Settlement (EAS) Price message is generated for selected securities at regular intervals throughout the business day.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	365 EAS Message
4	EASType	String	1	Determines whether this is a Stock EAS or Index EAS message	E Stock EAS H Hang Seng family of Indices EAS
5	InstrumentCode	String	20	Corresponds to the 'Underlying' field within the Series Definition message.	Stock EAS: 5 digit security codes with possible values 1 – 99999 Index EAS: The Index Provider's Index Code for HSI and HHI indices
25	EAS	Int64	8	Estimated Average Settlement Value	2 implied decimal places
33	Filler	String	3		
Total Length			36		

3.11 NEWS

3.11.1 Market Alert (323)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.11.1	●	●	●

The Market Alert message is generated periodically to relay market announcements and alerts.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	323 Market Alert
4	Header	String	160	Header	Unicode UTF-16LE encoded
164	InfoType	UInt8	1	Information Type	0 Not Specified 1 Company Announcement 2 Market Message 3 Static Line 4 Notice Received
165	Priority	UInt8	1	Priority	0 Not Specified 1 Low priority 2 Medium priority 3 High priority 4 Critical priority
166	Filler		1		
167	NoLines	UInt8	1	Maximum 9 lines	
168	Content	String	160	Market Alert Content – number of occurrences according to 'NoLines' field	Unicode UTF-16LE encoded The language will be either English or Chinese
Total Length			168 + 160 n _p		

(n_p = value of NoLines)

3.12 CLEARING INFORMATION

The trading system disseminates clearing related information.

3.12.1 Open Interest (366)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.12.1	●	●	

Typically issued at start of day to show the Previous Trading Day and then around the end of day with the Current Trading Day Open Interest information. In the event of corrections, Open Interest messages may be resent multiple times.

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	366 Open Interest
4	DayIndicator	UInt16	2	Session indicator used to distinguish between the previous and current trading days	0 Previous Trading Day 1 Current Trading Day
6	Filler		6		
12	OrderbookID	UInt32	4	Uniquely identifies the series	
16	Settlement	int32	4	Settlement Price	
20	DealCount	UInt32	4	Deal Count	
24	GrossOI	UInt32	4	Gross Open Interest	
28	NetOI	UInt32	4	Net Open Interest	
32	Turnover	UInt64	8	Turnover	
Total Length			40		

3.12.2 Implied Volatility (367)

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
3.12.2		●	

Message Fields

Offset	Field	Format	Len	Description	Values
0	MsgSize	UInt16	2	Size of the message	
2	MsgType	UInt16	2	Type of message	367 Implied Volatility
4	OrderbookID	UInt32	4	Uniquely identifies the series	
8	ImpliedVolatility	UInt32	4	Implied Volatility	
Total Length			12		

4. RECOVERY

OMD provides three different mechanisms for recovering missed data:

Line arbitration – using dual multicast channels (Line A and Line B)

Retransmission Server – recovery of a limited number of messages

Refresh Server – snapshot of current market state

These mechanisms should be used as described in the following table.

Table 2: Recovery Mechanisms

Event	Action
Packet lost on one either Line A or Line B	Try to recover data from the other line with a configurable timeout (“arbitration mechanism”).
Dropped packet(s) on both Line A and Line B	Recover dropped message(s) from the Retransmission Server.
Late start up or extended intraday outage	Wait for a refresh of the current market state and then continue with real time messages.

4.1 GAP DETECTION

Each packet provides the sequence number (SN) of the first message it contains. This sequence number starts at 1 and increases with each subsequent message.

The sequence numbers provided in every packet header is calculated by adding the previous sequence number and the message count, as shown in table below:

Table 3: Sequence Number Calculation

Packet	Sequence Number	Message Count
Packet 1	1	4
Packet 2	5	2
Packet 3	7	1
Packet 4	8	3
Packet 5	11	1


If the client drops the first five packets they would request a gap fill for messages 1-11.

All messages conform to the message level sequencing. Each channel has its own sequence number. This allows recipients to detect gaps or duplicates in each message sequence number and, if appropriate, reconcile them (line arbitration) with the primary or secondary multicast groups or request retransmission of the missing / corrupted messages.

Users should use this sequence number to detect gaps in the transmission of messages.

The following diagram illustrates how the message sequence number should be used to detect gaps in the feed.

Figure 2: Gap Detection using the Sequence Number (SN)

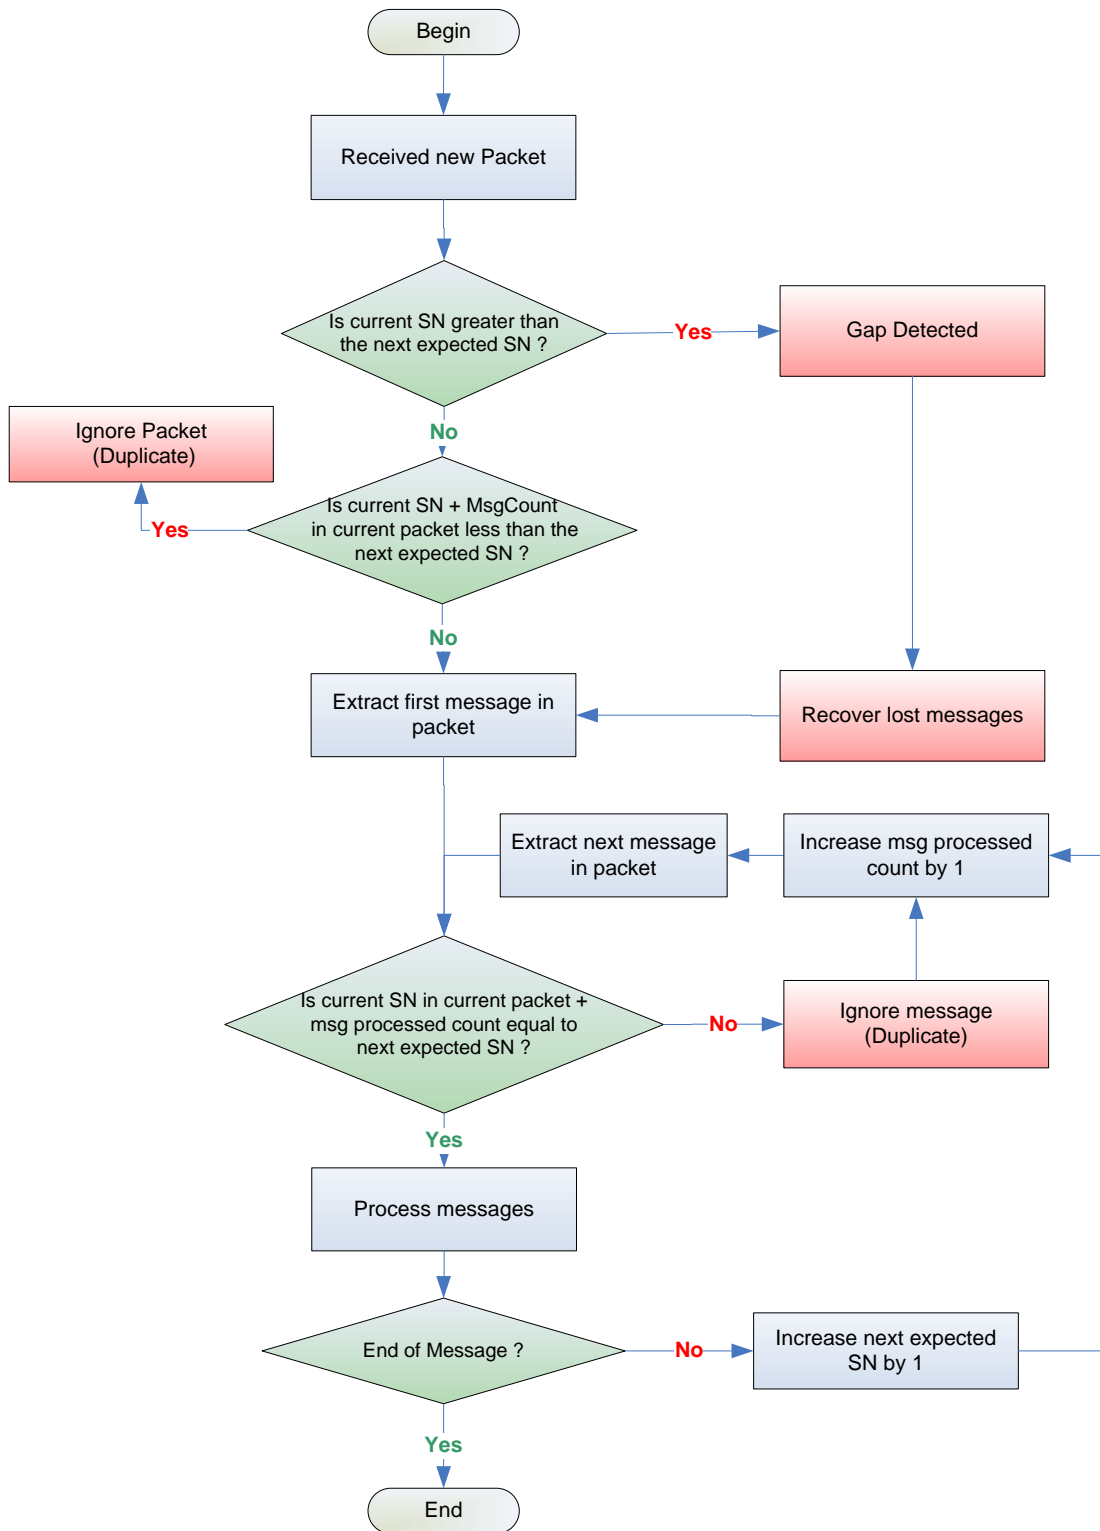

4.2 LINE ARBITRATION


Client applications should check the sequence number (SN) and message count (MC) for every packet received. SNs are unique and increase monotonically for each service, the MC indicates the number of messages within each packet.

Line A and Line B are identical in terms of:

- SNs
- Messages that are sent
- Sequence in which messages are sent

However it is not guaranteed that a packet content between Line A and Line B will be the same. For example the third packet of the day from the Line A could contain SN 10 with MC 3, where as the third packet of the day from Line B could contain SN 9 with MC 4. For this reason clients must arbitrate on SN (at the message level) rather than packet content. Client applications should listen to both Line A and Line B in real-time. Clients should look at packets coming from both lines and process the ones that arrive first, regardless of whether they came from Line A or Line B. It is advisable to apply the “first come – first served” rule.

Figure 3 – Detecting Missing Packets

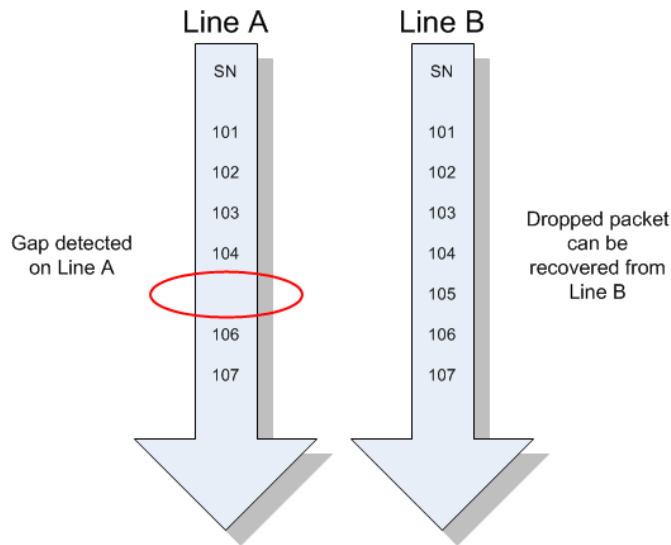

Additional Notes;

- The above example of a dropped packet is a simplified example assuming 1 message per packet, in reality each packet is likely to contain multiple messages
- Whilst the order of individual messages between Line A and Line B will be identical, there is no guarantee that the packets will contain exactly the same messages.
- In the example below, three packets are sent on each line, but message ‘OrderUpdate3’ appears in one packet from Line A but in the subsequent packet on Line B.

Figure 4 – Normal Message Delivery


Primary			Secondary		
Messages	MC	SN	SN	MC	Messages
OrderUpdate1	3	101	101	2	OrderUpdate1
OrderUpdate2					OrderUpdate2
OrderUpdate3			103	3	OrderUpdate3
Trade1	2	104			Trade1
OrderUpdate4					OrderUpdate4
Trade2	2	106	106	2	Trade2
Statistics 1					Statistics 1

4.3 RETRANSMISSION SERVICE

The retransmission service is provided via the TCP/IP protocol and is designed to allow clients to recapture a small number of missed messages already published on the real time channels.

It is not intended that clients use the retransmission server to recover data after long outages or on late start up (in these situations, clients should use the Refresh service). To that end, it supports the retransmission of the last 50,000 messages per multicast channel only. The sequence range of messages that a client can request and the number of retransmission requests permitted per day is also limited.

The following diagram illustrates the message flow during a retransmission session:

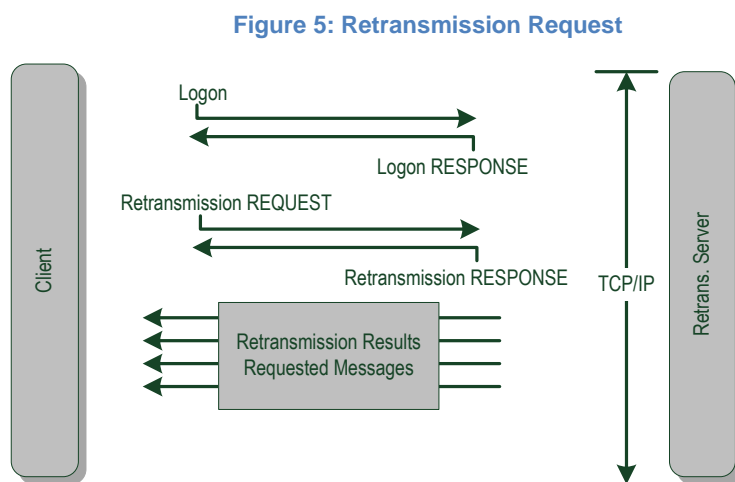

Logon

The client establishes a TCP/IP connection and initiates a session by sending the Logon message. Once the client is authenticated the server will respond immediately with the Logon Response message. If the client does not send a Logon message within the logon timeout interval, the server will close the connection.

Logons may be rejected for the following reasons:

- Invalid username
- User already connected

In all cases the server will close the connection after sending the Logon Response message.

Making a request

The client can make a retransmission request by sending the Retrans Request message. The server will respond with a Retrans Response message to indicate whether the request has been accepted or not.

In the case of a successful request the server will send the requested messages immediately after the Retrans Response message.

The sequence numbers will be the same as when they were first sent on the real time multicast channel. The framing of the retransmitted messages into a packet may differ from the original transmission.


Retransmission requests may be rejected for the following reasons:

- Unknown channel ID or illegal (not authorized)
- Messages not available
- Exceeds maximum sequence range
- Exceeds maximum requests in a day

In the case where the client has exceeded the maximum number of requests allowed in a day, the server will close the connection after sending the Retrans Response message.

The following diagram is a guideline of the flow of logic when making a request:

Figure 6: Requesting Dropped Packets

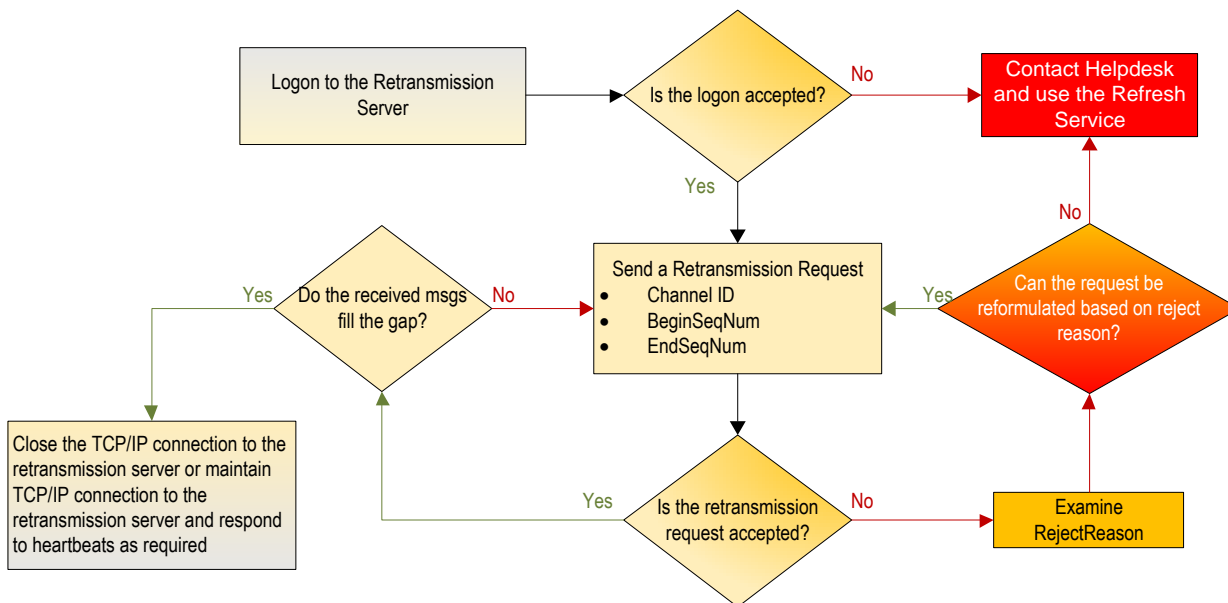

Multiple requests and concurrent sessions

Clients can send multiple requests during a session and can keep the session open during idle periods by responding to heartbeats sent by the server. Concurrent sessions however will not be supported. Each user can only have one session open at a time.

If a client makes multiple requests, the server will process them serially. Clients are unable to cancel outstanding requests.

Heartbeats

To determine the health of the user connection on the TCP/IP channel, the Retransmission Server will send regular heartbeat packets to the user. The heartbeat frequency is 30 seconds. The client application must respond with a “Heartbeat Response” packet. The time out for this heartbeat response packet is set at 5 seconds. If no response is received by the server within this timeframe, the TCP/IP session will be disconnected.

Figure 7: Retransmission Server Heartbeat Message



A “heartbeat response” packet consists in an exact copy of the incoming heartbeat packet.

Closing the session

Sessions should be terminated by gracefully closing the TCP/IP connection.

System limits

The system limits mentioned above are set as follows:

System Limit	Value
--------------	-------

Last number of messages available per channel ID	50,000
Maximum sequence range that can be requested	10,000
Maximum number of requests per day	1,000
Logon timeout (seconds)	5
Heartbeat interval (seconds)	30
Heartbeat response timeout (seconds)	5

Please note that the maximum number of requests per day limit is across all channels.

High availability

For each site, two sets of IP address and port are provided for the retransmission service in order to facilitate high availability. Clients may connect to both retransmission servers at the start of the day and maintain the connection during the day by responding to heartbeats.

In the event that Retransmission Server A (RTS A) does not respond to a logon or retransmission request, Retransmission Server B (RTS B) should be used.

In the event of a failure of either RTS A or RTS B, there may be a short period of unavailability. This failure should be detected by clients through the loss of connection. In this case the other RTS should be used.

RTS B should not be used as a means of requesting from two sources at the same time.

Disaster recovery

Two sets of backup IP address and port are also provided for the disaster site’s retransmission service.

During normal conditions the retransmission service at the disaster site is not available. If clients attempt to connect, this will fail.

In the unlikely event of a disaster recovery situation, the retransmission service at the disaster site will be brought up and clients may connect via the backup IP addresses and ports.

4.4 REFRESH SERVICE

The refresh service is designed to allow clients to recover from a large scale data loss. This can happen after a late start or during a major outage.

Synchronization is on a per channel basis. For each real time multicast channel, there exists a corresponding refresh multicast channel on which snapshots of the market state are sent at regular intervals throughout the business day. No ordering should be assumed between the various different data types unless otherwise stated – this is due to the nature of using multiple different multicast channels for refresh.

Snapshot

A snapshot of the market state is described in the table below.

Message	Snapshot description
---------	----------------------

Message	Snapshot description
Series Definition	<p>A full list of all series, which includes any series modifications or series additions made intraday. The order is sent as:</p> <ul style="list-style-type: none"> • Commodity Definition (301) • Class Definition (302) • Series Definition Base (303) • Series Definition Extended (304) • Combination Definition (305) <p><i>NOTE: Next day series are not currently included in Refresh</i></p> <p><i>NOTE: Within the Refresh Service the Commodity Definition (301), Class Definition (302) and Series Definition Extended (304) are sent on a dedicated multicast channel and arrive in that order. Similarly the Series Definition Base (303) and Combination Definition (305) are sent on a dedicated multicast channel and arrive in that order.</i></p>
Market Status	The most recent Market Status message(s) – see section 3.8.1 for details about interpreting market state
Series Status	The most recent Series Status message(s) for each series
Commodity Status	The most recent Commodity Status message(s) for each commodity
Orders	For DS and DP subscribers: the latest level 2 orderbook via Aggregate Order Book messages For DF subscribers : The full order book provided via Add Order messages
Trade	The latest non-cancelled Trade message for each series
Trade Statistics & Series Statistics	The latest Trade Statistics and Series Statistics messages for each series in the T and T+1 sessions <i>NOTE : T+1 may not be available for all series and in any event would not be available until after the T+1 session has begun</i>
EAS	The latest Estimated Average Settlement message for each underlying received (both for Cash and Index EAS)
COP	The latest Calculated Opening Price message for each series
Market Alert	All Market Alert messages since start of day
Open Interest	Potentially up to 2 latest Open Interest message for each series – one for the Current Trading Day, and one for the Previous Trading Day
Implied Volatility	The latest Implied Volatility message for each series

The ordering of refresh messages types within the multicast channels is detailed below;

Channel	Refresh Sequence
Static Base	Series Definition Base (303) Combination Definition (305)
Static Extended	Commodity Definition (301) Class Definition (302) Series Definition Extended (304)
Status	Market Status (320) Commodity Status (322) Series Status (321)
Trades (DT)	Trade (350) Trade Amendment (356)
Order (DF)	Orderbook Clear (335) Calculated Opening Price (364) Add Order (330) Trade (350)
Orders (DP)	Orderbook Clear (335) Aggregate Order Book Update (353)
Orders (DS)	Orderbook Clear (335) Aggregate Order Book Update (353)

Refresh complete

A Refresh Complete message is sent at the end of a snapshot indicating the sequence number with which the snapshot is synchronized.

Snapshot processing

Below is an overview of the steps to carry out in order to process a channel snapshot.

- Subscribe to the real time multicast channel and cache received messages.
- Subscribe to the corresponding refresh multicast channel and discard messages until the Refresh Complete message is received.
- Process received messages until the next Refresh Complete message is received.
- Store the LastSeqNum sequence number provided in the Refresh Complete.
- Unsubscribe to the refresh multicast channel.
- Discard the cached real time messages with sequence number less than or equal to LastSeqNum.
- Process the remaining cached real-time messages and resume normal processing.

Missed messages

The retransmission server does not support refresh channels. If a client misses messages, it must wait for the next snapshot. Similarly if a client starts listening during the middle of a snapshot, it must wait for the next snapshot.

4.4.1 Refresh of Market Status

Many of the messages within refresh are singular per series and the refresh server simply published the most recent value. However the refresh data will typically include a number of Market Status (320) messages will be sent together and correct processing users should refer the description given in Section 3.8.1 to determine the correct Trading and Instrument Session State.

5. FULLTICK ORDERBOOK MANAGEMENT

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
5			●

The information needed to build an order book view from the message flow is contained within the following messages:

- Add Order (330)
- Modify Order (331)
- Delete Order (332)

Orders shall be ranked by:

- Order Book Position. 1 denotes the highest ranked order. For an Modify Order (331), the order must be removed from its previous position and inserted at new OrderBookPosition. An order inserted at an existing position shifts the order on that position down (and all orders below as well. A deleted or fully filled order causes existing orders below it to shift their position up one step to fill the "void".

The Modify Order (331) message signals that the order has been modified. The current rank may or may not be lost in the process OrderBookPosition field will show the new rank within the book.

The Order Delete (332) message tells the recipient to remove the order referenced.

6. AGGREGATE ORDER BOOK MANAGEMENT

The information supplied in this section and its sub-sections applies to the Datafeed(s) marked with [●]

Section	Derivatives Standard (DS)	Derivatives Premium (DP)	Derivatives FullTick (DF)
6	●	●	

Book Identification

A book is uniquely identified by either OrderbookID or Symbol and there is a 1-to-1 map between these two identifiers. OrderbookID is an integer representation of 4 bytes, Symbol is a longer String representation (32 bytes) that gives the short name. Whilst Symbol is 'readable' to human users, the OrderbookID is more efficient when sending market data updates, and therefore OrderbookID is the identifier that appears on every series related message.

Partial Price Depth

The price level within the Aggregate Order Book Update message determines the number of price levels the order price is away from the best price for a given order book. An order with price level 1 means the order's price is the best price, a price level of 2 will be used for orders at the next best price, etc.

OMD provides a view of 10 price depths of aggregate order book for the Derivatives Market. This view can be visualized as a number of rows in a table for each of the bid and ask sides. On each side there are a number of rows showing the aggregate quantity available at a number of price levels.

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	700	9730	9760	500	1
2	350	9720	9770	300	2
3	150	9710	9780	100	3
4	250	9700	9790	150	4
5	100	9690			
6	150	9680			
7	50	9670			
8	200	9660			
9	100	9650			

Book Updates

Book update messages are generated by OMD as delta messages defined in section 5 (**Aggregate Order Book Update (353)**). Each message may contain any combination of new, changed or deleted entries for a book. The nature of an entry is defined by its UpdateAction.

New, to create/insert a new price level

Delete, to remove a price level

Change, to update aggregate quantity at a price level

Orderbook Clear, to inform users that all price levels should be cleared

Example 1 – Quantity Reduction and Explicit Addition

For example suppose the Ask order at price level 9770 is reduced in quantity and at the same time a new order is added at price level 9850, then the following message is sent;

Offset	Field Name	Value
0	MsgSize	60
2	MsgType	53

4	OrderbookID	1234
8	Filler	NULL
11	NoEntries	2
12	AggregateQuantity	200
20	Price	9770
24	NumberOfOrders	1
28	Side	1 (Offer)
30	PriceLevel	2
31	UpdateAction	1
32	Filler	NULL
36	AggregateQuantity	300
44	Price	9850
48	NumberOfOrders	1
52	Side	1 (Offer)
54	PriceLevel	5
55	UpdateAction	0
56	Filler	NULL

The resulting book should now be as follows:

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	700	9730	9760	500	1
2	350	9720	9770	200	2
3	150	9710	9780	100	3
4	250	9700	9790	150	4
5	100	9690	9850	300	5
6	150	9680			
7	50	9670			
8	200	9660			
9	100	9650			

Example 2 – Implicit Level Adjustments

The client must adjust the price level of entries below deleted or inserted entries. Potential level adjustments must be carried out after each single entry in Aggregate Order Book message.

For example, if a bid order with price 9740 and quantity 50 is added to the order book above, it will cause the following message to be sent:

Offset	Field Name	Value
0	MsgSize	36
2	MsgType	53
4	OrderbookID	1234
8	Filler	NULL
11	NoEntries	1
12	AggregateQuantity	50
20	Price	9740
24	NumberOfOrders	1
28	Side	0 (Bid)

	30	PriceLevel	1
	31	UpdateAction	0
	32	Filler	NULL

After processing this message, the client's book should look as follows:

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	50	9740	9760	500	1
2	700	9730	9770	200	2
3	350	9720	9780	100	3
4	150	9710	9790	150	4
5	250	9700	9850	300	5
6	100	9690			
7	150	9680			
8	50	9670			
9	200	9660			
10	100	9650			

Price levels of the other 9 Bid orders must all be incremented although there will not be Aggregate Order Book Update messages sent for the increment.

Example 3 – Implicit Deletions

For DP subscribers, implicit deletions are relevant, but notice also that the aggregated 11th price level will also be adjusted – see example 5 below for details.

If a new book entry causes the bottom entry of a book to be shifted out of the book (i.e. more than 9 price levels away from the best price), the client must delete the excess entry. If the book shrinks again, OMD resends the entries that have temporarily fallen out.

For example, if a bid order with price 9750 and quantity 250 is added to the book above, and the bid quantity at price 9660 is reduced from 200 to 150, it will cause the following message to be sent:

Offset	Field Name	Value
0	MsgSize	60
2	MsgType	53
4	OrderbookID	1234
8	Filler	NULL
11	NoEntries	2
12	AggregateQuantity	250
20	Price	9750
24	NumberOfOrders	1
28	Side	0 (Bid)
30	PriceLevel	1
31	UpdateAction	0
32	Filler	NULL
36	AggregateQuantity	150
44	Price	9660
48	NumberOfOrders	1
52	Side	0 (Bid)
54	PriceLevel	10
55	UpdateAction	1

	56	Filler	NULL	
--	----	--------	------	--

After processing this message, the client's book should look as follows:

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	250	9750	9760	500	1
2	50	9740	9770	200	2
3	700	9730	9780	100	3
4	350	9720	9790	150	4
5	150	9710	9850	300	5
6	250	9700			
7	100	9690			
8	150	9680			
9	50	9670			
10	150	9660			

Price 9750 and quantity 250 is added according to the message.

Price 9650 and quantity 100 must be deleted by the client.

Price 9660 quantity must be reduced to 150 – PriceLevel 10 is used in the incoming message to reflect the new price level of the price 9660 after the addition of the price 9750.

Example 4 – Explicit Additions

For DP subscribers, explicit additions are relevant, but notice also that the aggregated 11th price level will also be adjusted – see example 5 below for details.

If orders are removed so that there are now less than 10 levels visible then the server will also automatically send the additional level(s) that are now revealed.

For example, if the bid order with price 9750 and quantity 250 is now removed from the book above and this reveals an 11th level which needs to be disseminated then it will cause the following message to be sent:

Offset	Field Name	Value
0	MsgSize	60
2	MsgType	53
4	OrderbookID	1234
8	Filler	NULL
11	NoEntries	2
12	AggregateQuantity	250
20	Price	9750
24	NumberOfOrders	1
28	Side	0 (Bid)
30	PriceLevel	1
31	UpdateAction	2
32	Filler	NULL
36	AggregateQuantity	100
44	Price	9650
48	NumberOfOrders	1
52	Side	0 (Bid)
54	PriceLevel	10
55	UpdateAction	0

	56	Filler	NULL	
--	----	--------	------	--

The resulting order book should now be;

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	50	9740	9760	500	1
2	700	9730	9770	200	2
3	350	9720	9780	100	3
4	150	9710	9790	150	4
5	250	9700	9850	300	5
6	100	9690			
7	150	9680			
8	50	9670			
9	200	9660			
10	100	9650			

Example 5 – The Aggregated 11th Level

The aggregated 11th price level is available to DP subscribers who use the 10BBO+11 representation and it shows total order volume beyond the 10th level. In the following example a Bid Order (Quantity 200) is added at price level 9640 to the orderbook shown above. As a result a new price level is sent.

Offset	Field Name	Value
0	MsgSize	60
2	MsgType	53
4	OrderbookID	1234
8	Filler	NULL
11	NoEntries	2
12	AggregateQuantity	200
20	Price	NULL
24	NumberOfOrders	1
28	Side	0 (Bid)
30	PriceLevel	255
31	UpdateAction	0 (New)
32	Filler	NULL

The resulting order book should now be;

Bid Side			Ask Side		
PriceLevel	AggregateQuantity	Price	Price	AggregateQuantity	PriceLevel
1	50	9740	9760	500	1
2	700	9730	9770	200	2
3	350	9720	9780	100	3
4	150	9710	9790	150	4
5	250	9700	9850	300	5
6	100	9690			
7	150	9680			
8	50	9670			
9	200	9660			
10	100	9650			
>10	200	NULL			

7. AUCTION PERIOD SPECIAL HANDLING

During the pre-opening period the level 2 orderbook messages that are disseminated are adjusted so that subscribers do not see a crossed orderbook. Note that this special handling only applies to instruments which have an opening auction.

During auction session before the matching takes place, a Calculated Opening Price (364) message will be disseminated in the event of crossed book. In such case, Aggregated Order Book Update (353) messages will be sent to update the top price level of both sides with Price equalling the COP, Number of Orders and Aggregate Quantity including those of market orders and orders at prices at or better than the COP.

In this way:

- DS and DP subscribers will receive orderbook messages that are adjusted using 'COP Merge' (details below)
- DF subscribers will not receive any order information as individual orders will not be sent during the auction session

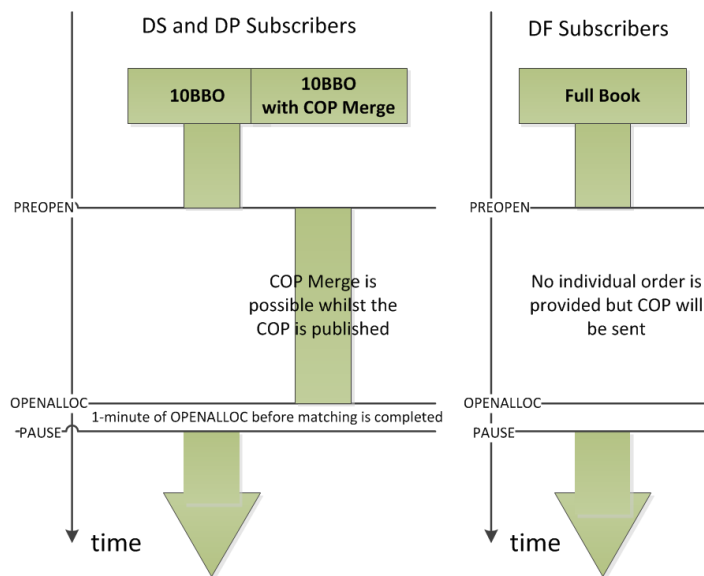


Figure 1 - Auction Period

COP Merge

Bids with a price that is the same or greater than the COP will be shown at the COP price.
 Offers with a price that is the same or less than the COP will be shown at the COP price.

8. HKEX DERIVATIVES MARKET

8.1 MARKET STATES

The market states and types of trading activity can take place in each state are explained below:

Status Code	Description
1	OPEN ALLOCATION SESSION (Part of pre-opening phase, used for COP calculation)
2	TRADING HALT
3	RESUME
4	PREOPEN SESSION
5	PREOPEN ALLOCATION SESSION (Part of pre-opening phase, used for auction order input only)
6	MARKET PAUSE Note: Trade matching for pre-opening or lunch break
7	PRE-MARKET ACTIVITIES (It is applicable to markets without PREOPEN SESSION arrangement)
8	CLEARING SESSION START (Clearing activities can be started)
9	CLEARING SESSION CLOSED (Clearing activities are ended)

8.2 DEAL SOURCES

The deal source codes are explained below:

Deal Source Code	Description
0	Internal use. Trades reported directly to the clearing subsystem.
1	Matched by system, automatically.
2	Matched by system, manually.
3	Matched Outside Exchange, Different participants
4	Matched outside exchange, different brokers, reg. by exchange.
5	Matched Outside Exchange, One participant
6	Matched outside exchange, one broker, reg. by exchange.
7	Combination order matched against another combination order when matched by the Exchange, electronically.
8	Deal in a Swap Box instrument.
9	Matched electronically, member internal.
10	Deal in a Swap Box instrument, member internal.
11	After market closure, outside system, different brokers
12	After market closure, outside system, different brokers, registered by the exchange.
13	After market closure, outside system, one broker
14	After market closure, outside system, one broker, registered by the exchange.
15	Internally created basis trade.
16	Reversing deal made by the exchange manually.
17	Reversing deal made by the exchange manually.
18	Basis trade.
19	Internally created.
20	Deal made at the end of an auction.

21	Private request for quote.
22	Package private request for quote.
23	Internally from combo.
24	Internally from TM.
25	Internally from average.
26	Internally from strip.
27	Delta hedge.
28	CL bundle deal.
32	Trade from Bulletin Board.
33	Trade from Bulletin Board, standard combo.
34	Trade from Bulletin Board, non-standard combo.
35	Trade from Bulletin Board, non-standard combo.
36	Tailor-made combination.
37	Non-standard combination.
38	Outside the Exchange, block trade facility.
39	Matched outside the Exchange, combinations.
40	Outside the Exchange, block trade facility.
41	No Deal Price.
42	Priority crossing.
43	Combination matched outright legs.
44	Matched outside exchange, broker.

8.3 LIST OF INSTRUMENT CODE

Instrument Code	Description
004	Futures
006	Call (American style)
007	Put (American style)
022	Call (European style)
023	Put (European style)
119	Time Spread (level=1)
120	Time Spread (level=2)
121	Time Spread (level=3)
122	Time Spread (level=4)
149	Time Spread (level=5)
150	Time Spread (level=6)
151	Time Spread (level=7)
152	Time Spread (level=8)
165	Time Spread (level=9)
170	Options Straddle
171	Options Strangle
172	Standard Combination series for Stock Options Market(SOM) – Synthetic Futures
255	Payment Currency

Note:

Instrument codes 004, 006, 007, 022 and 023 are for normal series whereas the remaining are for combo series.

8.4 LIST OF MARKET ID

Market ID	Description
2	Stock Futures
3	3 Three-Year Exchange Fund Note Futures
8	8 Gold Futures
16	16 Mini Hang Seng Index Futures / Options
20	20 Stock Options
24	24 HIBOR
27	27 HSI Dividend Point Index Futures, HSCEI Dividend Point Index Futures
34	34 Hang Seng Index Futures / Options
35	35 Flexible Hang Seng Index Options
37	Flexible H-shares Index Options
38	H-shares Index Futures / Options